S
625.7
H3mph
1975

STATE DOCUMENTS

MONTANA PRIMARY HIGHWAYS 1975 SUFFICIENCY RATING

MONTANA STATE LIBRARY
930 East Lyndale Avenue
Helena, Montana 59601

Montana State Library
3 0864 1006 6205 8

PREPARED BY THE

STATE OF MONTANA
DEPARTMENT OF HIGHWAYS
PLANNING AND RESEARCH BUREAU

IN COOPERATION WITH THE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

Cover Photo: U S. 212, F.A.P. Rt. 37, M.P. 41

December 31, 1975

TABLE OF CONTENTS

	PAGE
Introduction	1
Sufficiency Compared to Age of Rural Primary System	6
Miles of Rural Federal Aid Primary Highways Year Constructed	7
Location of Deficient Section -- Statewide	8
Miles of Rural Primary Highway by Sufficiency Rating and Financial District	10
Tabulation of Deficient Mileage by Financial Districts	11
Tabulation of Deficient Mileage by Federal Aid Routes	12
System Map - Interstate and Primary	14
Route Maps Showing Sufficiency Ratings by Section	17
Rural Sufficiency Ratings by Section and Financial District in ascending order	
Financial District Number 1	89
Financial District Number 2	93
Financial District Number 3	96
Financial District Number 4	99
Financial District Number 5	102
Financial District Number 6	105
Financial District Number 7	108
Financial District Number 8	111
Financial District Number 9	115
Financial District Number 10	118
Financial District Number 11	121
Financial District Number 12	124
Urban Deficiency Ratings by Federal Aid Route and City	129
Rural Sufficiency Ratings by Section -- Statewide in ascending order	157

INTRODUCTION

* * *

In order to comply with the provisions of the State Financial District Law, the Montana Department of Highways has the responsibility to evaluate the condition of the Federal-aid Primary System throughout the State for the purpose of allocating construction funds to the various financial districts. In 1948, a formula was developed to determine the relative deficiency of each section of highway, which was based largely on a comparison of the existing condition of the highway with the latest design standards. The deficiency ratings thus contained were also converted to priority ratings by the application of a traffic volume factor.

During recent years, other states have developed newer formulas for appraising the sufficiency of highways in those states, and since it was apparent that these formulas provided a better basis for evaluating highway conditions, the various formulas were studied with the objective of developing a new formula for Montana that would improve our rating procedure. This study resulted in a new sufficiency rating procedure, which is used in determining the allocation of construction funds to the financial districts and as a priority-rating guide for programming of new construction projects.

This 1975 report is the fourth to be compiled by fully utilizing the Highway Information System data bank. All items used in the sufficiency formula with the exception of the condition of pavement, foundation and drainage, were extracted from the data bank.

The sufficiency rating procedure applies only to rural sections of the Federal-aid Primary System highways. It is not adaptable to urban sections of highway because of the special traffic capacity

conditions encountered in the cities, and for this reason, the urban sections of highway continue to be rated on the basis of the older formula until such time as a new urban sufficiency rating procedure can be devised.

A total of 5039.6 miles of Primary highways rated in this report, the same highways rated in 1974, is composed of 4862.0 miles of rural and 177 .6 miles located within municipal and urban areas.

A completely adequate section of rural highway is assigned 100 points in the sufficiency rating formula. As defined for this study, a section of highway meriting a rating of 100 points must have a thoroughly sound structure, must be free from those hazards that can be eliminated by proper road design and must have adequate capacity to satisfactorily handle existing traffic demands.

The following factors are considered in the sufficiency formula.

A. Structural Adequacy - Total 50 Points

1. Foundation - 10 Points
2. Surface - 30 Points
3. Orainage - 10 Points

B. Safety - Total 20 Points

1. Number of stopping sight distances, shorter than permitted by design speed.
2. Number of horizontal curves, sharper than permitted by design speed.
3. Number of bridges narrower than the width of the traveled-way of approaches.

4. Number of accidents as related to the average traffic volume for the analysis period.

C. Hourly Service Volume (Traffic Capacity) - Total 30 Points

1. Design hour traffic volume for the current year.
2. Pavement and shoulder widths
3. Percent of commercial vehicles
4. Length of no passing zones
5. Design speed.
6. Average highway speed.

Structural adequacy was determined by a field inspection of the entire system. To insure uniformity, this inspection was made by one man who has been schooled in rating techniques. Field measurements of pavement and roadway widths were also made during this inspection, as a check on existing records. The foundation of a section of highway was assigned points in the field between a maximum of 10 if it was considered adequate, and 0 if it was totally inadequate. Surfacing was rated and assigned points between 30 if excellent, and 0 if extremely poor. Drainage was also assigned points between 10 and 0 in the same manner as foundation and surfacing.

Factors affecting the safety rating, such as inadequate stopping sight distances, narrow bridges, and excessive horizontal curves, were obtained from the road plans and straight line diagrams. The number of traffic accidents for the analysis period were obtained from the accident subsystem of Highway Information System data bank.

A maximum of 20 points for safety was assigned to a section of highway if stopping sight distance is adequate, there are no excessive curves or narrow bridges and the number of accidents was below average. Conversely, the safety rating was reduced proportionately from 20 to 0 points by existence of any of these items.

The hourly service volume (traffic capacity) of each section of rural highway has been computed by the approved method for rural highways outlined in the new Highway Capacity Manual. This method takes into consideration such items as width of pavement and shoulders, percent of trucks, length of no passing zones, and design and average highway speeds.

The capacity rating expresses the relationship between the traffic volumes presently using the section of road and the ability of the section to accommodate such traffic. The rating is best described as the relationship between the computed Service Volume (SV) and the Design Hourly Volume (DHV). A capacity rating between 15 and 30 would indicate at least a level of Service B. Ratings less than 15 would indicate that the volumes are exceeding the volume/capacity ratio that permits free flow at the desired speed.

A total basic sufficiency rating of a section is the sum of the following ratings.

Item	Range of Points
Foundation	0 to 10
Surface	0 to 30
Drainage	0 to 10
Safety	0 to 20
Capacity	0 to 30
Total Rating	0 to 100

The adjusted sufficiency rating has been computed to establish priorities for sections of highway falling into the same general sufficiency rating category. The total basic sufficiency rating is adjusted by comparing the average daily traffic carried by a rating section, with the average for the system. This adjustment gives some additional priority to a section of highway carrying above-average traffic volumes.

The curves shown on page 6 were plotted by accumulating the miles of rural primary highway in each adjusted sufficiency category and the miles of highway in each age group. The two curves are quite similar.

The sharp break in the sufficiency blue curve, at about 40 percent, indicates that approximately 359 miles, or seven percent, of rural primary highways located in all sections of the State are in a critical category and should probably be constructed immediately, if funds are available. These sections are shown in red on the State map on page 8. There are approximately 2,307 miles of rural primary highway that are 60 percent or less sufficient and 1,948 miles that are rated between 40 and 60 percent. It may be assumed that 1,948 miles, or 40 percent, of our rural primary highways rated between 40 and 60 percent sufficient are approaching obsolescense and probably should be improved within the next five to ten years. The approximate location of this mileage is also shown in blue on the State map on page 8. Mileage rated between 61 and 100 percent sufficient is considered to be in tolerable to excellent condition. This category includes 2,555 miles of rural primary highways or 53 percent of the total Primary System exclusive of Interstate mileage.

ADJUSTED SUFFICIENCY RATINGS
AND
AGE OF RURAL PRIMARY SYSTEM

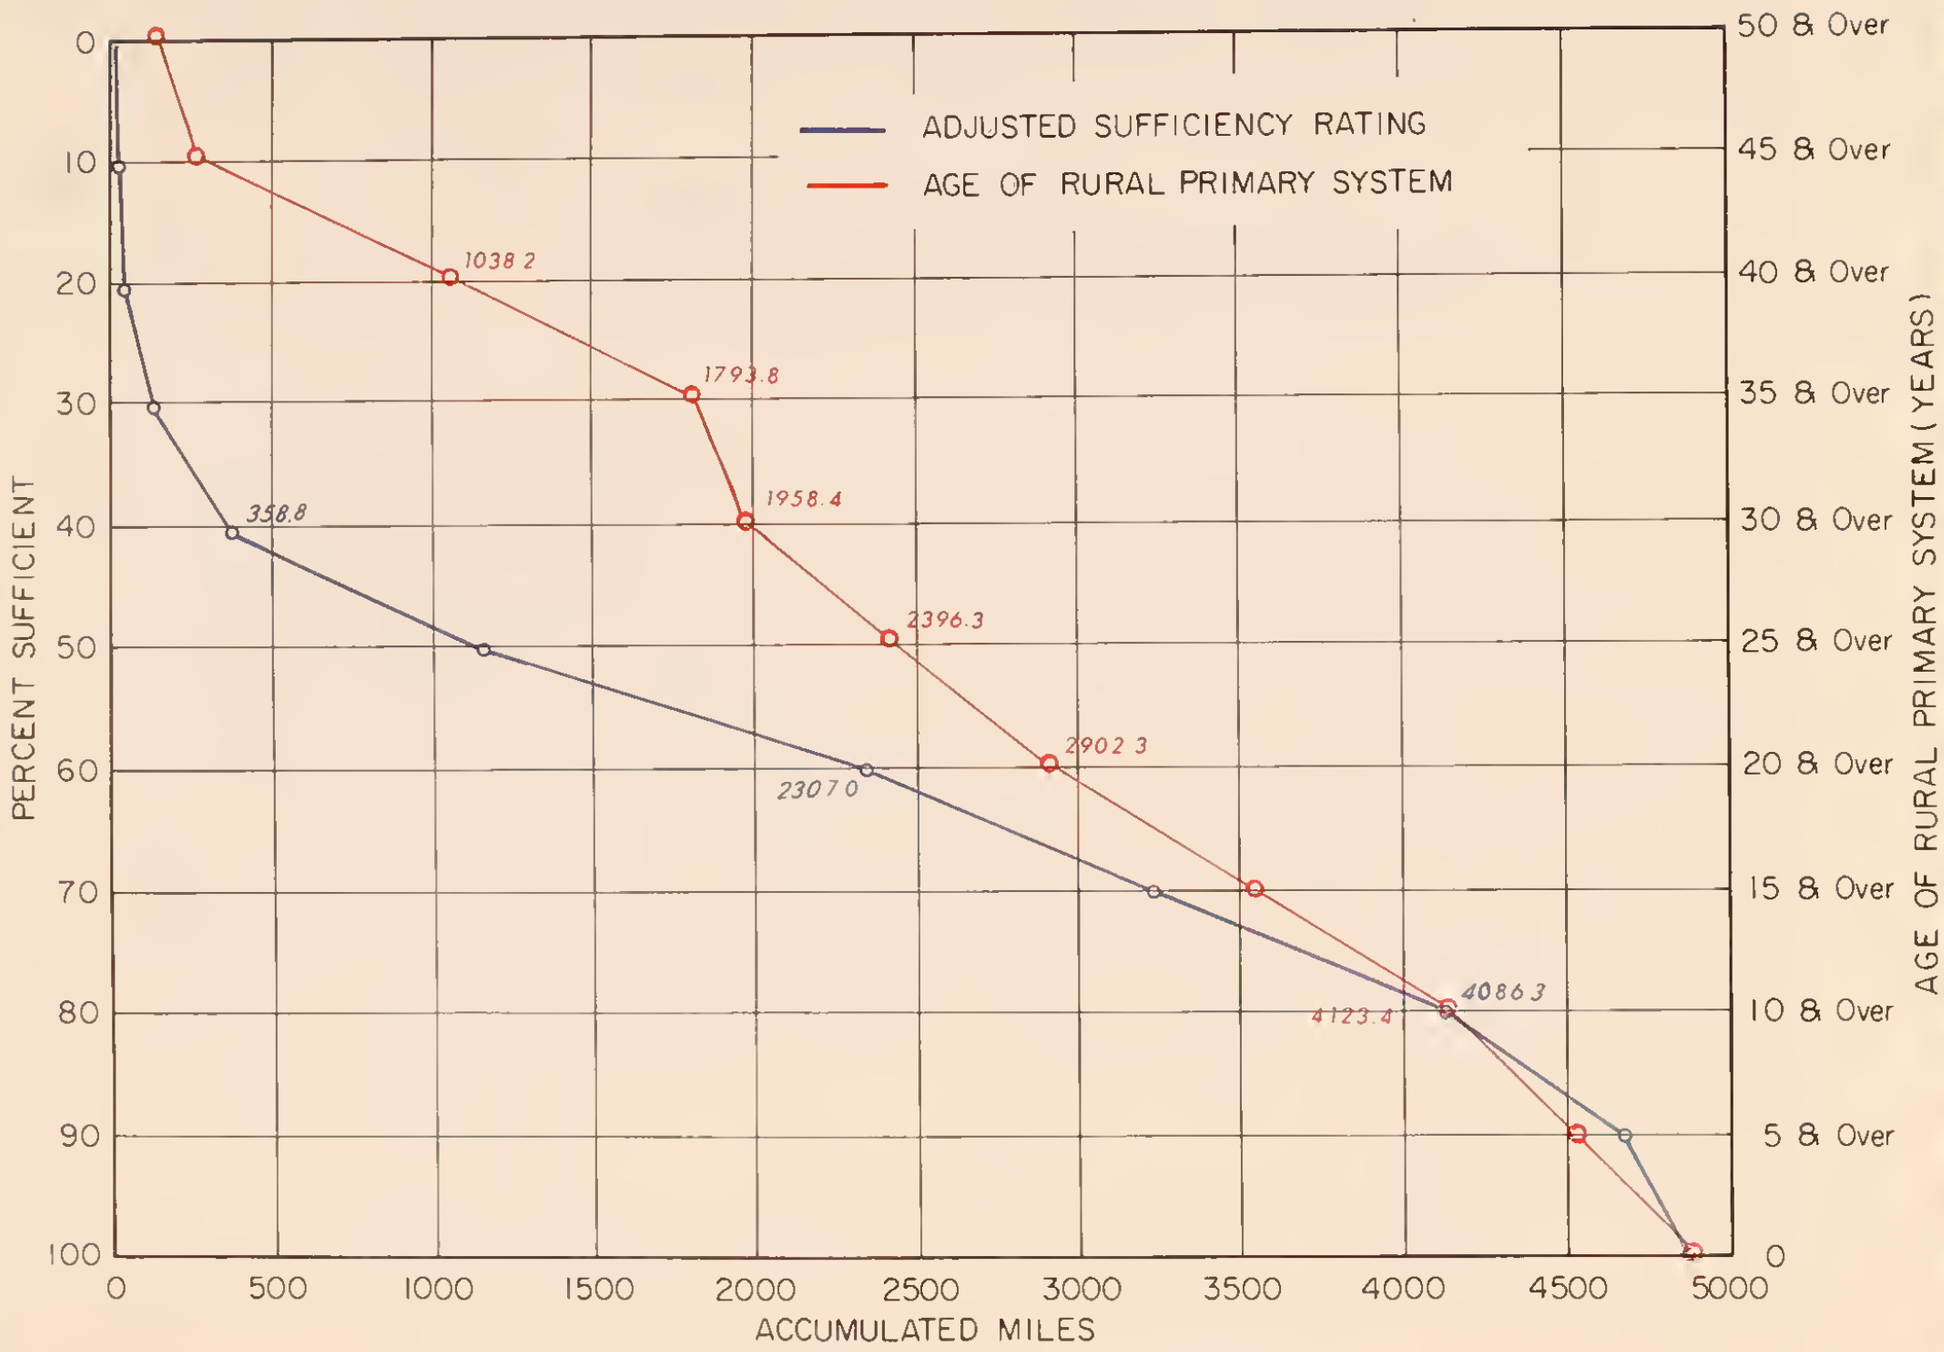

MONTANA

MILES OF RURAL PRIMARY FEDERAL AID HIGHWAYS CONSTRUCTED BY YEAR 1934-1975

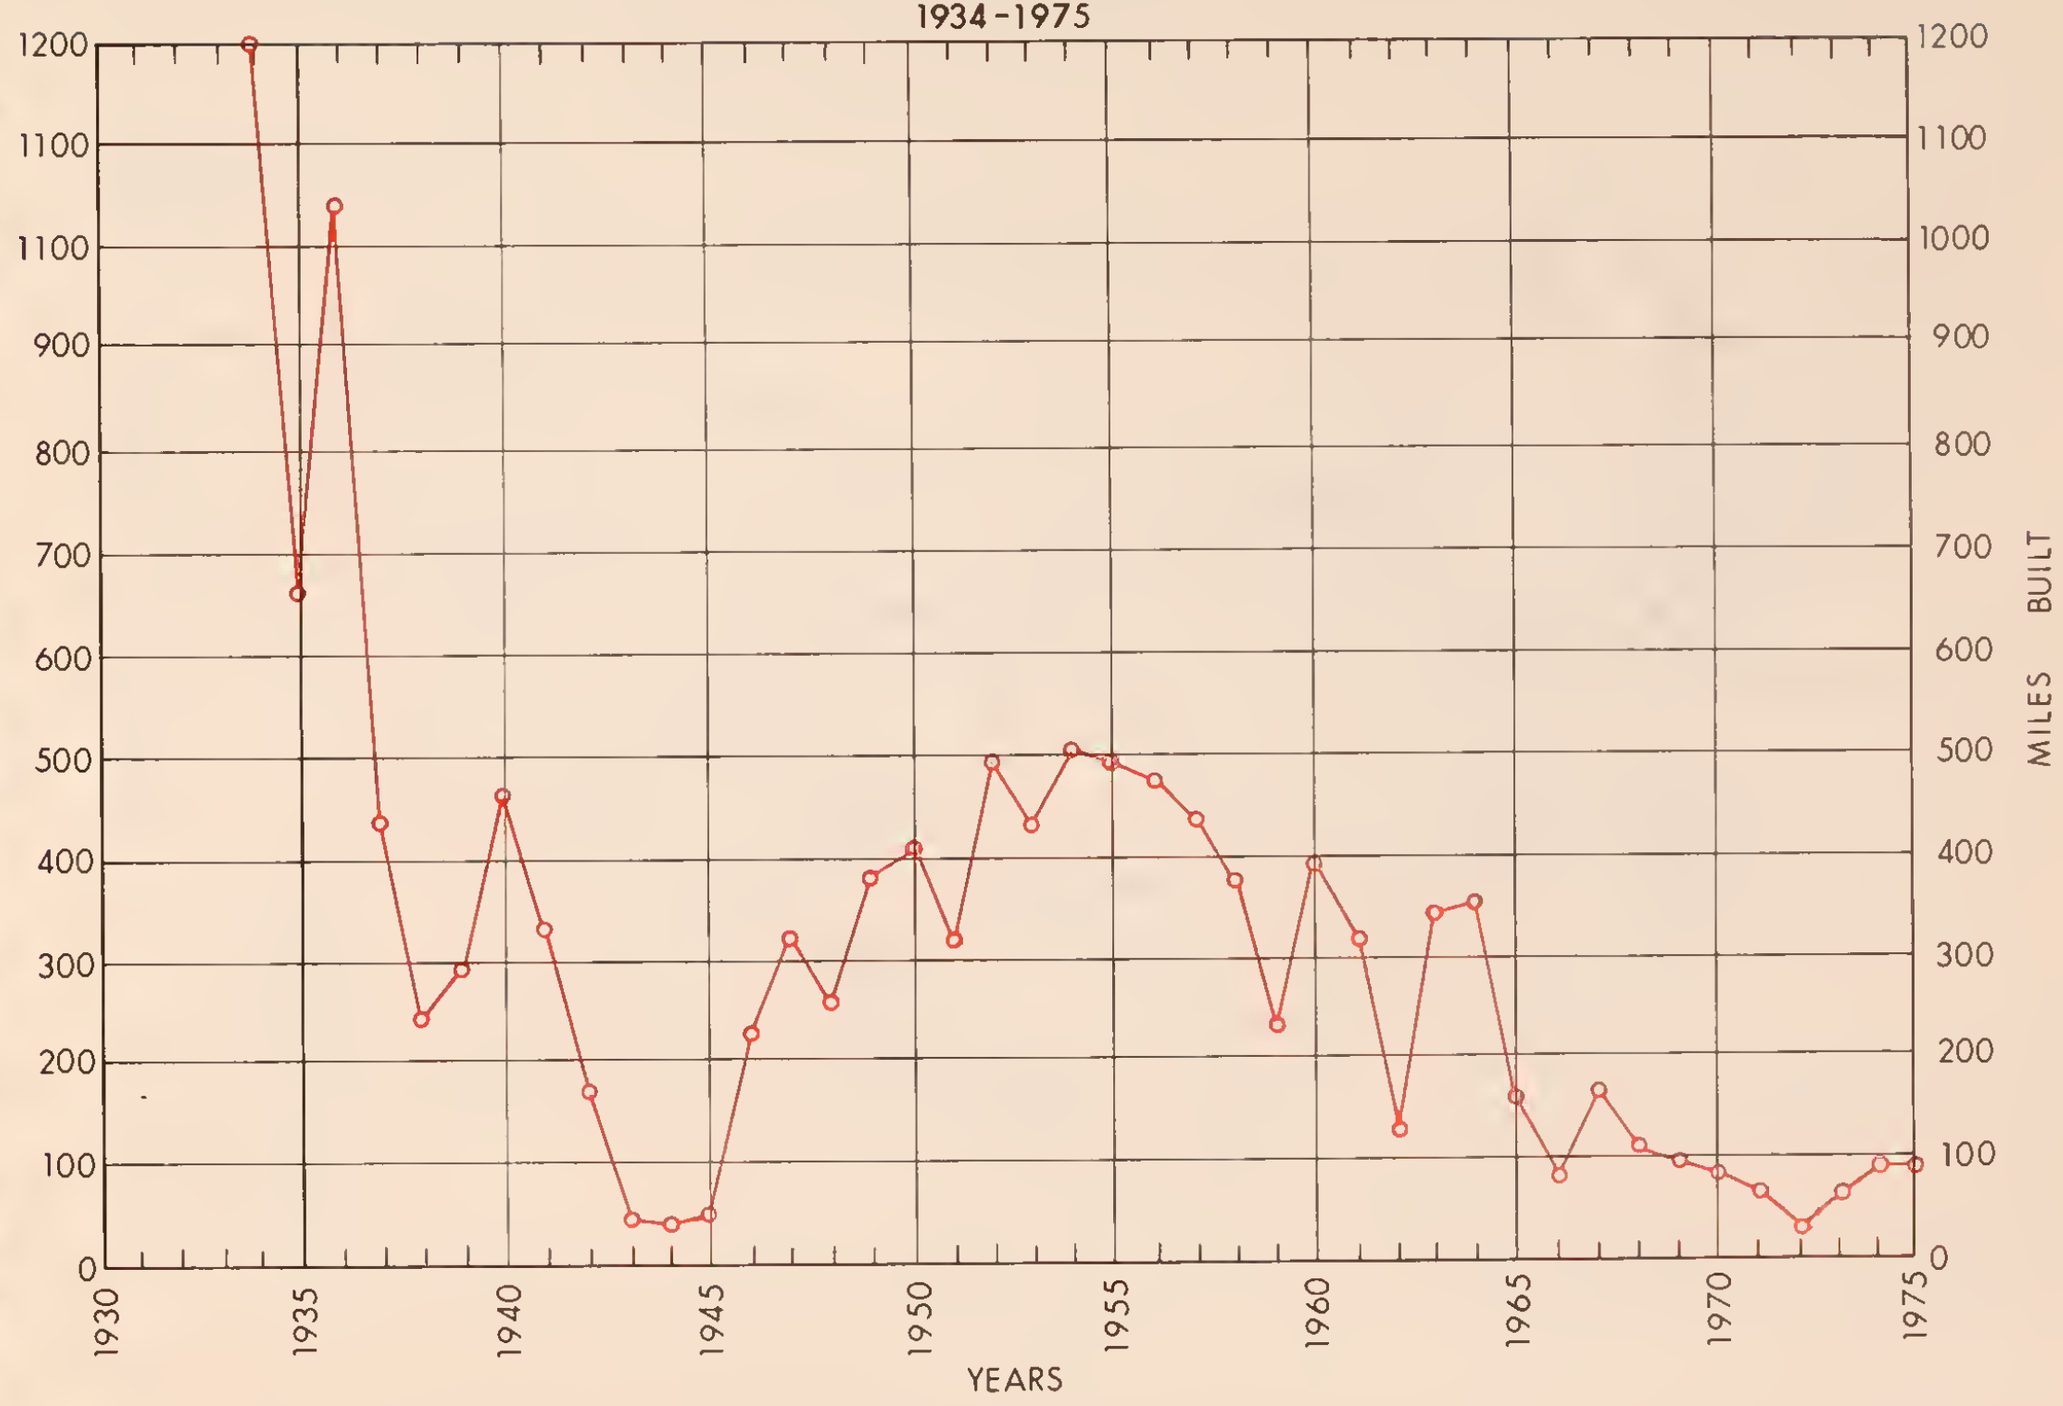

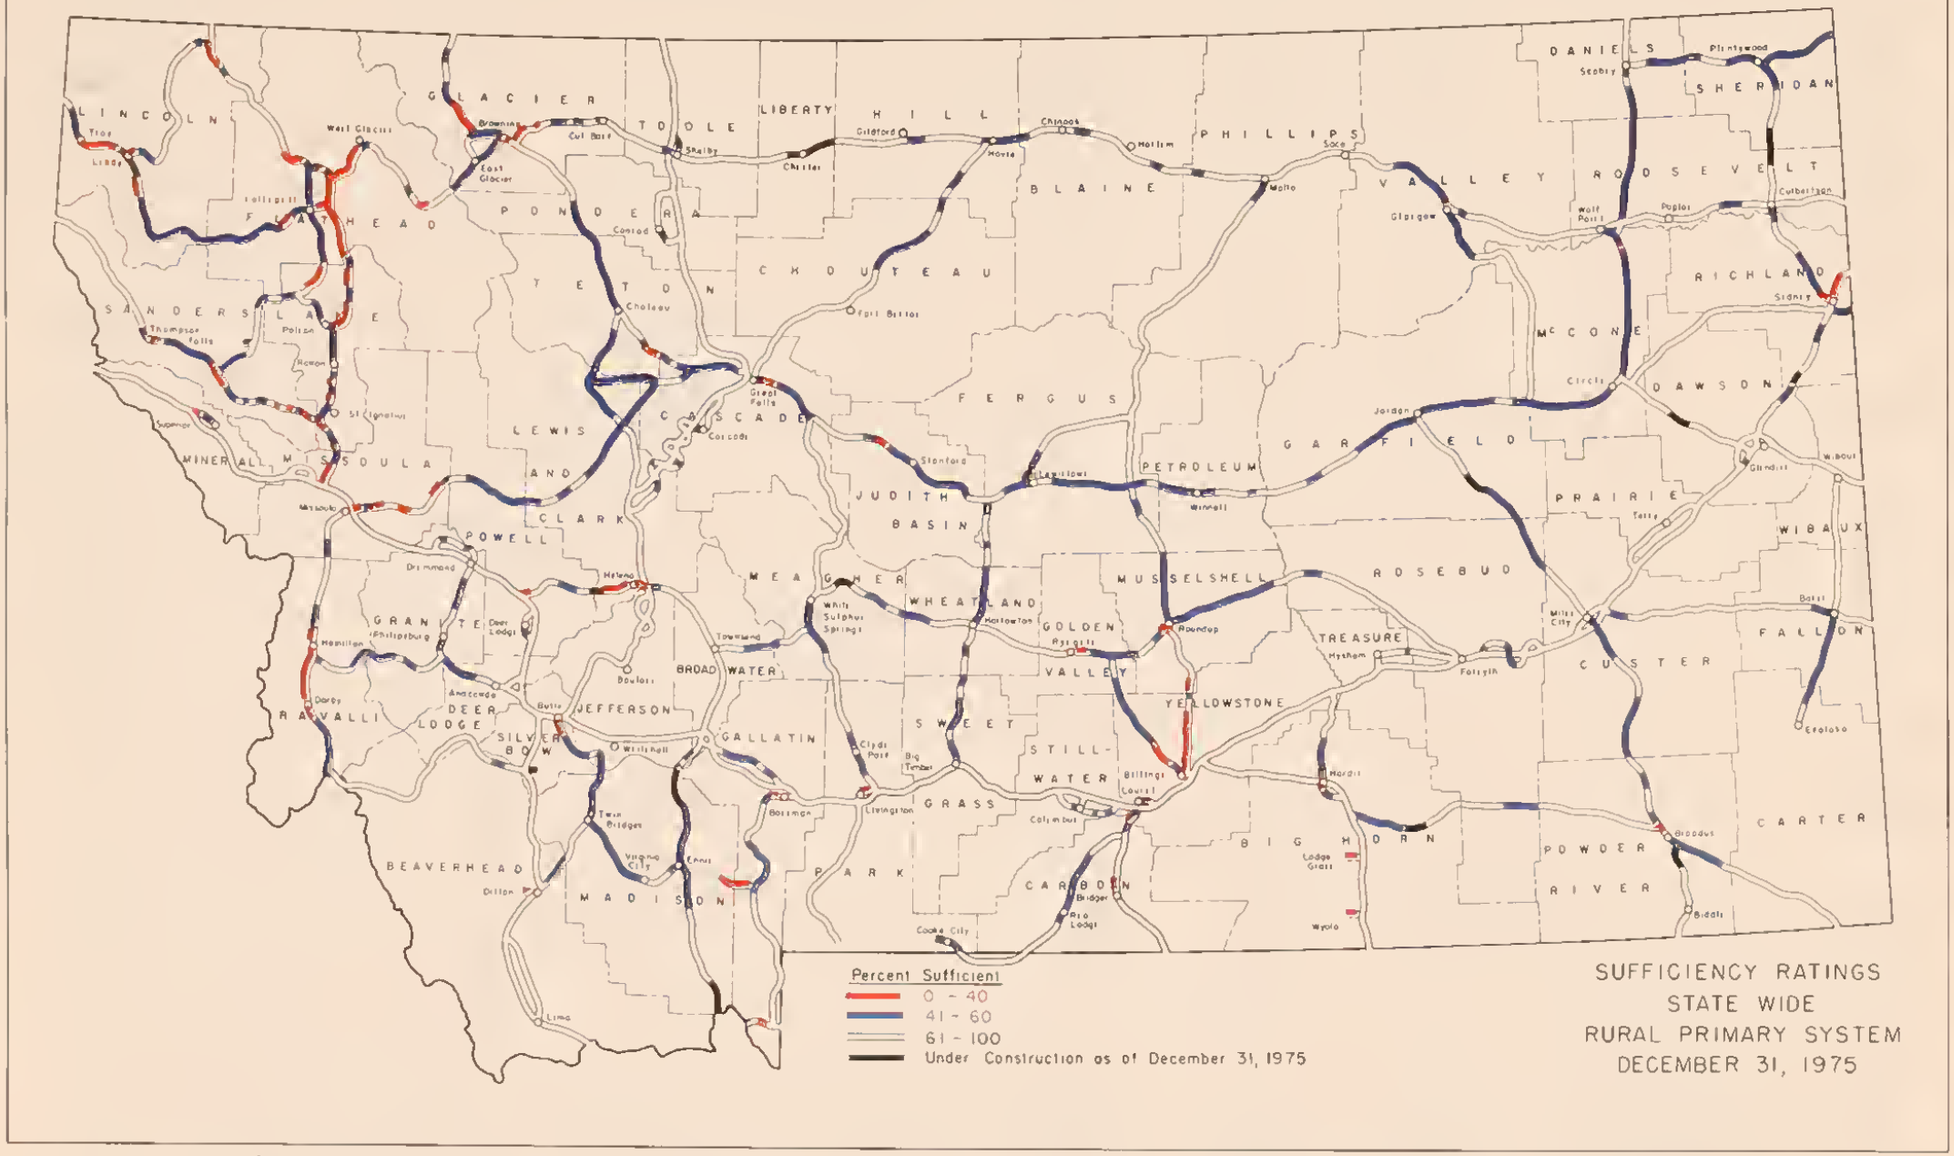

SUFFICIENCY RATINGS
STATE WIDE
RURAL PRIMARY SYSTEM
DECEMBER 31, 1975

The red curve on page 6 which illustrates the age of the rural primary system, indicates that approximately 1,038 miles of highway, that were in use as of December 31, 1975, are at least 40 years old. The same curve shows that 2,396 miles of highway, or about 49 percent of the total rural primary system, are now at least 25 years old.

The chart on page 7 is of historical interest in that it shows the miles of rural Federal-aid Primary highway constructed by years.

The tabulation on the following page shows the miles of rural highway in each financial district by adjusted sufficiency ratings. The tabulation on page 11 summarizes the equivalent deficient mileage by financial districts and also indicates the percentage of deficient mileage that were used to allocate State construction funds to the 12 financial districts for the fiscal year beginning July 1, 1976.

A tabulation of total miles, percent deficient and equivalent deficient miles by rural Federal-aid Primary Routes appears on page 12.

Strip maps of each Federal-aid Route showing the location of each rating section and the rating assigned in all categories of the formula are included in the first section of this report. The beginning of each section has also been tied to our milepost numbering system to aid in locating any particular section. The "year built" and "year improved" have been added to each rating section. The "year built" is the date that the existing section was constructed or fully reconstructed while the "year improved" indicates

MILES OF RURAL HIGHWAY
DISTRIBUTED BY ADJUSTED SUFFICIENCY RATING
IF TEN PERCENT INCREMENTS

PERCENT SUFFICIENT		FINANCIAL DISTRICTS 1	2	3	4	5	6	7	8	9	10	11	12	TOTALS	ACCUM. TOTALS
0-10	MILES								.2	5.6	6.6	2.7		15.2	15.2
PERCENT	%									1.9	1.5	.7		.3	.3
11-20	MILES	2.0						2.0	7.2					11.4	26.7
PERCENT	%	.4						.8	1.6					.2	.5
21-30	MILES	51.0	4.2				.9		14.0			1.5		71.8	98.5
PERCENT	%	10.4	1.2				.2		3.1			.4		1.5	2.0
31-40	MILES	91.1	20.5	.3	15.3	1.1	15.4	9.5	49.6		10.8	44.9	1.3	260.2	358.8
PERCENT	%	18.7	5.9	.1	3.9	.3	3.9	3.7	10.8		2.4	11.0	.2	5.4	7.4
41-50	MILES	134.6	55.6	43.3	49.3	32.6	128.9	31.5	134.9	37.4	45.3	81.8	37.4	813.1	1171.9
PERCENT	%	27.5	16.0	8.9	12.6	9.3	32.3	12.1	29.4	12.4	10.2	20.1	7.2	16.7	24.1
51-60	MILES	60.4	58.9	126.0	60.8	136.7	50.8	96.2	80.7	98.6	126.6	113.4	125.4	1135.0	2307.0
PERCENT	%	12.4	17.0	26.0	15.5	38.8	12.7	37.1	17.6	32.6	28.4	27.9	24.0	23.3	47.5
61-70	MILES	53.1	73.6	109.9	71.4	37.3	102.7	71.9	57.9	54.8	59.2	77.2	134.8	904.3	3211.3
PERCENT	%	10.9	21.2	22.7	18.2	10.6	25.7	27.7	12.6	18.1	13.3	19.0	25.8	18.6	66.1
71-80	MILES	36.8	76.5	133.8	93.5	81.9	55.1	26.7	90.6	36.3	75.9	49.2	118.1	874.9	4086.3
PERCENT	%	7.5	22.1	27.6	23.8	23.3	13.8	10.3	19.7	12.0	17.0	12.1	22.6	18.0	84.1
81-90	MILES	47.1	33.6	59.6	91.6	39.2	44.4	15.3	11.8	33.1	82.5	18.5	86.3	563.4	4649.8
PERCENT	%	9.6	9.7	12.3	23.3	11.1	11.1	5.9	2.6	10.9	18.5	4.6	16.5	11.6	95.6
91-100	MILES	12.4	23.8	11.5	11.2	23.0	.8	6.0	12.1	36.3	38.3	17.0	18.9	211.8	4861.7
PERCENT	%	2.5	6.9	2.4	2.9	6.6	.2	2.3	2.6	12.0	8.6	4.2	3.6	4.4	100.0
TOTAL	MILES	488.8	347.0	484.5	393.4	352.1	399.4	259.6	459.4	302.3	445.5	406.7	522.5	4861.7	
PERCENT	%	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	

FEDERAL AID PRIMARY SYSTEM
DEFICIENT MILEAGE BY FINANCIAL DISTRICTS AND PERCENTAGES USED IN APPORTIDNING STATE CONSTRUCTIDN FUNDS TO FINANCIAL DISTRICTS FDR FISCAL YEAR BEGINNING JULY 1, 1976
BASED DN SUFFICIENCY RATING DECEMBER 31, 1975

Financial District	Counties	Total Mileage	Deficient Mileage			Percent Deficient	Percentage for Fund Allocation
			Rural	Urban	Total		
1.	Flathead, Lincoln. Lake	5DB.D	222.5	2.9	225.4	44.3	11.6649
2.	Blaine, Glacier, Hill, Liberty, Toole	355.6	118.6	1.3	119.9	33.7	6.2D50
3.	Daniels, Phillips, Roosevelt, Sheridan, Valley	49B.3	17D.8	1.7	172.5	34.6	8.9272
4.	Dawson, McCone, Prairie, Richland, Wibaux	406.6	14D.B	1.5	142.3	34.9	7.3643
5.	Fergus, Garfield, Petroleum	357.6	136.D	D.9	136.9	3B.2	7.D84B
6.	Cascade, Judith Basin, Pondera, Teton, Chouteau	417.2	163.2	3.4	166.6	39.9	B.621B
7.	Broadwater, Jefferson, Lewis and Clark	270.1	1D6.B	1.3	1DB.1	4D.0	5.5944
B.	Granite, Mineral, Missoula, Powell, Ravalli, Sanders	477.5	2D9.2	4.2	213.4	44.6	11.D43B
9.	Beaverhead, Deer Lodge, Madison, Silver Bow	322.9	113.7	4.9	118.6	36.7	6.1378
1D.	Gallatin, Meagher, Park, Sweet Grass, Wheatland	461.7	153.1	2.B	155.9	33.7	8.D681
11.	Big Horn, Carbon, Golden Valley, Musselshell, Stillwater, Treasure, Yellowstone	428.7	173.5	5.0	178.5	41.6	9.2377
12.	Carter, Custer, Fallon, Powder River, Rosebud	535.4	190.4	3.8	194.2	36.2	10.D5D2
	TDTAL	5039.6	1B9B.6	33.7	1932.3	3B.3	1DD.DDOO

SUFFICIENCY RATING RURAL PRIMARY SYSTEM
TOTAL BY RURAL PRIMARY ROUTES

ROUTE	TOTAL MILES	PERCENT DEFICIENT	EQUIVALENT DEFICIENT MILES
1	658.8	35.7	234.9
2	220.1	36.4	80.2
3	246.8	45.0	111.1
4	56.3	32.5	18.3
5	175.9	47.0	82.7
6	114.2	42.8	48.9
7	88.1	43.7	38.5
8	99.7	35.1	35.0
9	64.1	39.5	25.3
10	106.8	33.7	36.0
11	208.5	28.9	60.3
12	8.6	36.0	3.1
13	96.4	33.8	32.6
14	252.8	39.6	100.2
15	321.2	38.0	122.0
16	201.2	41.3	83.1
17	34.1	42.2	14.4
18	82.0	38.0	31.2
19	58.2	40.0	23.3
20	60.0	36.8	22.1
21	12.9	37.2	4.8
22	121.8	35.5	43.2
23	137.1	40.9	56.1
24	161.7	45.9	74.3
25	52.2	54.2	28.3
26	7.5	56.0	4.2
27	77.6	37.9	30.0
28	62.6	41.1	25.7
29	81.5	50.4	41.1
30	23.4	49.6	11.6
32	64.9	45.1	29.3
33	66.3	26.1	17.3
35	53.8	53.3	28.7
36	48.5	45.0	22.0
37	103.6	34.6	35.8
38	7.9	50.6	4.0
42	75.4	36.5	27.5
43	42.2	38.2	16.1
45	81.9	43.2	35.4
46	76.5	27.8	21.3
47	6.0	26.7	1.6
48	30.6	27.5	8.4
49	26.4	40.9	10.8
50	98.9	38.8	38.4
51	70.7	29.8	21.1
52	45.5	60.7	27.6
53	41.0	50.5	20.7
54	29.3	19.8	5.8
Grand Total	4861.7	39.0	1893.9

the date of the last major improvement on a section by maintenance betterment or construction.

Sufficiency ratings have been tabulated on a statewide basis by rating sections in ascending order by adjusted sufficiency ratings. These same tabulations are also included for each of the twelve financial districts along with a map of each district which shows the location of sections rated from 0 to 60 percent.

BRITISH COLUMBIA
DOMINION OF CANADA
ALBERTA
SASKATCHEWAN
NORTH DAKOTA
SOUTH DAKOTA
WYOMING
LINCOLN
FLATHEAD
SANDERS
LAKE
MINERAL
MISSOULA
GLACIER
TOOLE
LIBERTY
HILL
PONDERA
TETON
CHOUTEAU
LEWIS AND CLARK
CASCADE
FERGUS
PHILLIPS
VALLEY
DANIELS
SHERIDAN
ROOSEVELT
BLAINE
RICHLAND
MCCONE
DAWSON
PETROLEUM
GARFIELD
PRAIRIE
WIBAUX
JUDITH BASIN
POWELL
GRANITE
MEAGHER
WHEATLAND
GOLDEN VALLEY
MUSSELSHELL
ROSEBUD
FALLON
RAVALLI
BROADWATER
JEFFERSON
GALLATIN
SWEET GRASS
STILLWATER
YELLOWSTONE
TREASURE
CUSTER
DEER LODGE
SILVER BOW
BEAVERHEAD
MADISON
PARK
CARBON
BIG HORN
POWDER RIVER
CARTER
LEGEND
FEDERAL AID INTERSTATE ROUTE
FEDERAL AID PRIMARY ROUTE
MONTANA
FEDERAL AID INTERSTATE AND PRIMARY SYSTEMS

Route Maps
Sufficiency Ratings
By Section

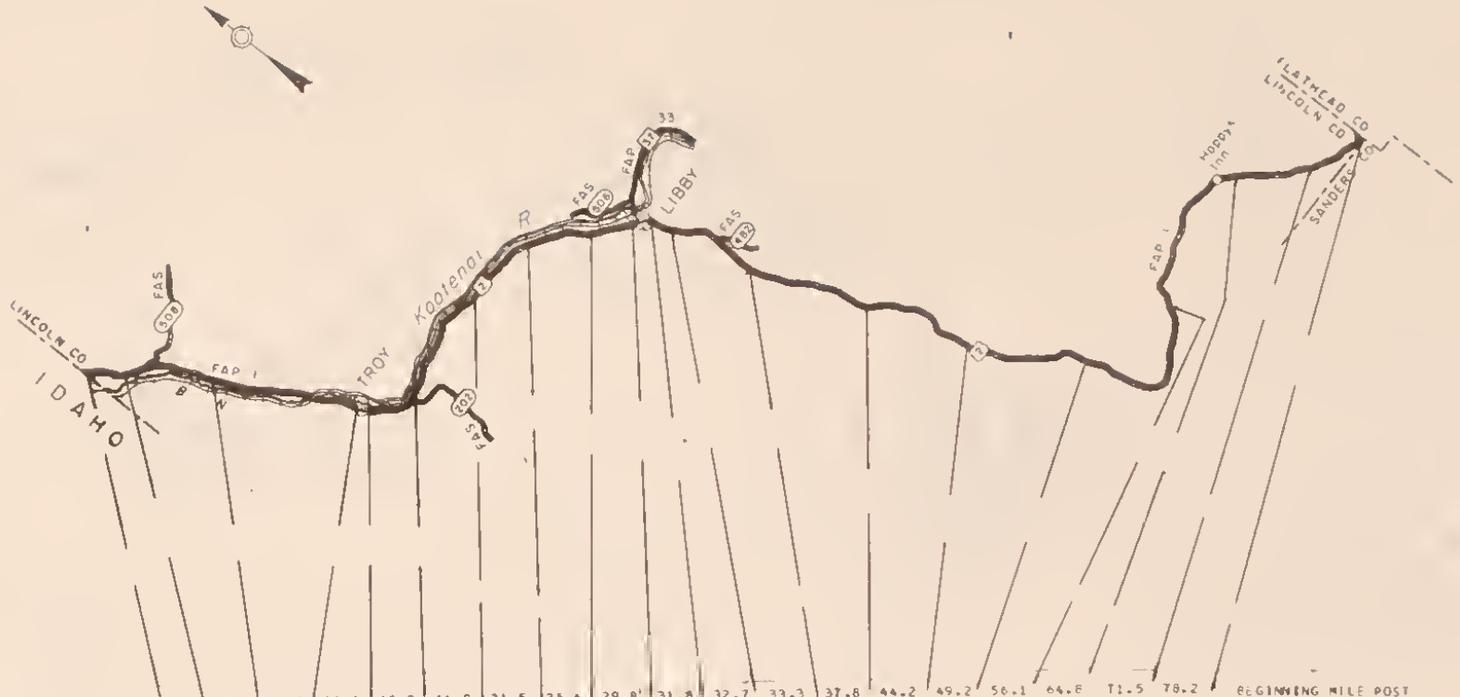

BEGINNING MILE POST	0.0	2.6	6.9	13.9	15.2	16.9	21.5	25.4	29.8	31.8	32.7	33.3	37.8	44.2	49.2	56.1	64.8	71.5	78.2	BEGINNING MILE POST
LENGTH	2.6	4.3	6.9	1.3	1.6	4.5	3.9	4.4	2.0	0.8	0.5	4.5	6.3	5.0	6.E	E.6	6.7	6.6	2.1	LENGTH
YEAR BUILT	54	49	49	U	37	34	37	38	U	U	U	U	36	36	35	38	41	37	37	YEAR BUILT
YEAR IMPROVED	55	51	51	R	38	38	TO	62	N	R	N	N	61	65	39	50	43	53	53	YEAR IMPROVED
SURFACE WIDTH	24	22	22	B	20	20	25	24	O C	°8	O C	O C	24	2C	20	20	20	22	22	SURFACE WIDTH
ROADWAY WIDTH	30	28	28	A	24	24	26	24	E O	A	E O	E O	24	24	24	26	24	24	24	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	N	RMS	RMS	RMS	RMS	P N	N	P N	P N	RMS	RMS	RMS	RMS	RMS	RMS	RMS	SURFACE TYPE
ADT	1004	1026	1349		1846	1550	1795	2015	S		S	S	1229	1055	1046	1004	862	940	1020	ADT
DHV	130	133	175		239	201	233	261	T		T	T	159	137	135	130	112	122	132	DHV
SERVICE VOLUME	323	338	508		365	211	528	530	R		R	R	353	184	264	312	288	272	290	SERVICE VOLUME
FOUNDATION - 10	4	4	2		0	0	0	0	U		U	U	0	0	0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	18	14	14		11	12	9	9	C		C	C	11	13	14	11	13	15	17	SURFACE - 30
DRAINAGE - 10	9	8	8		5	3	4	3	T		T	T	7	7	4	6	7	5	6	DRAINAGE - 10
SAFETY - 20	20	2	6		5	3	8	1	I		I	I	1	8	3	8	2	2	14	SAFETY - 20
CAPACITY - 30	24	24	25		20	16	23	23	O		O	O	23	15	22	24	24	23	23	CAPACITY - 30
SUFFICIENCY RATING	75	52	55		41	34	44	36	N		N	N	42	47	42	49	46	45	60	SUFFICIENCY RATING
ADJUSTED RATING	74	51	52		36	30	39	30					40	46	42	48	46	44	59	ADJUSTED RATING
DEFICIENT MILEAGE	.65	2.08	3.13		.57	3.01	2.19	2.83					3.TC	2.65	3.91	4.42	2.64	3.65	.85	DEFICIENT MILEAGE

FAP ROUTE NO 1
SHEET 1 OF 7

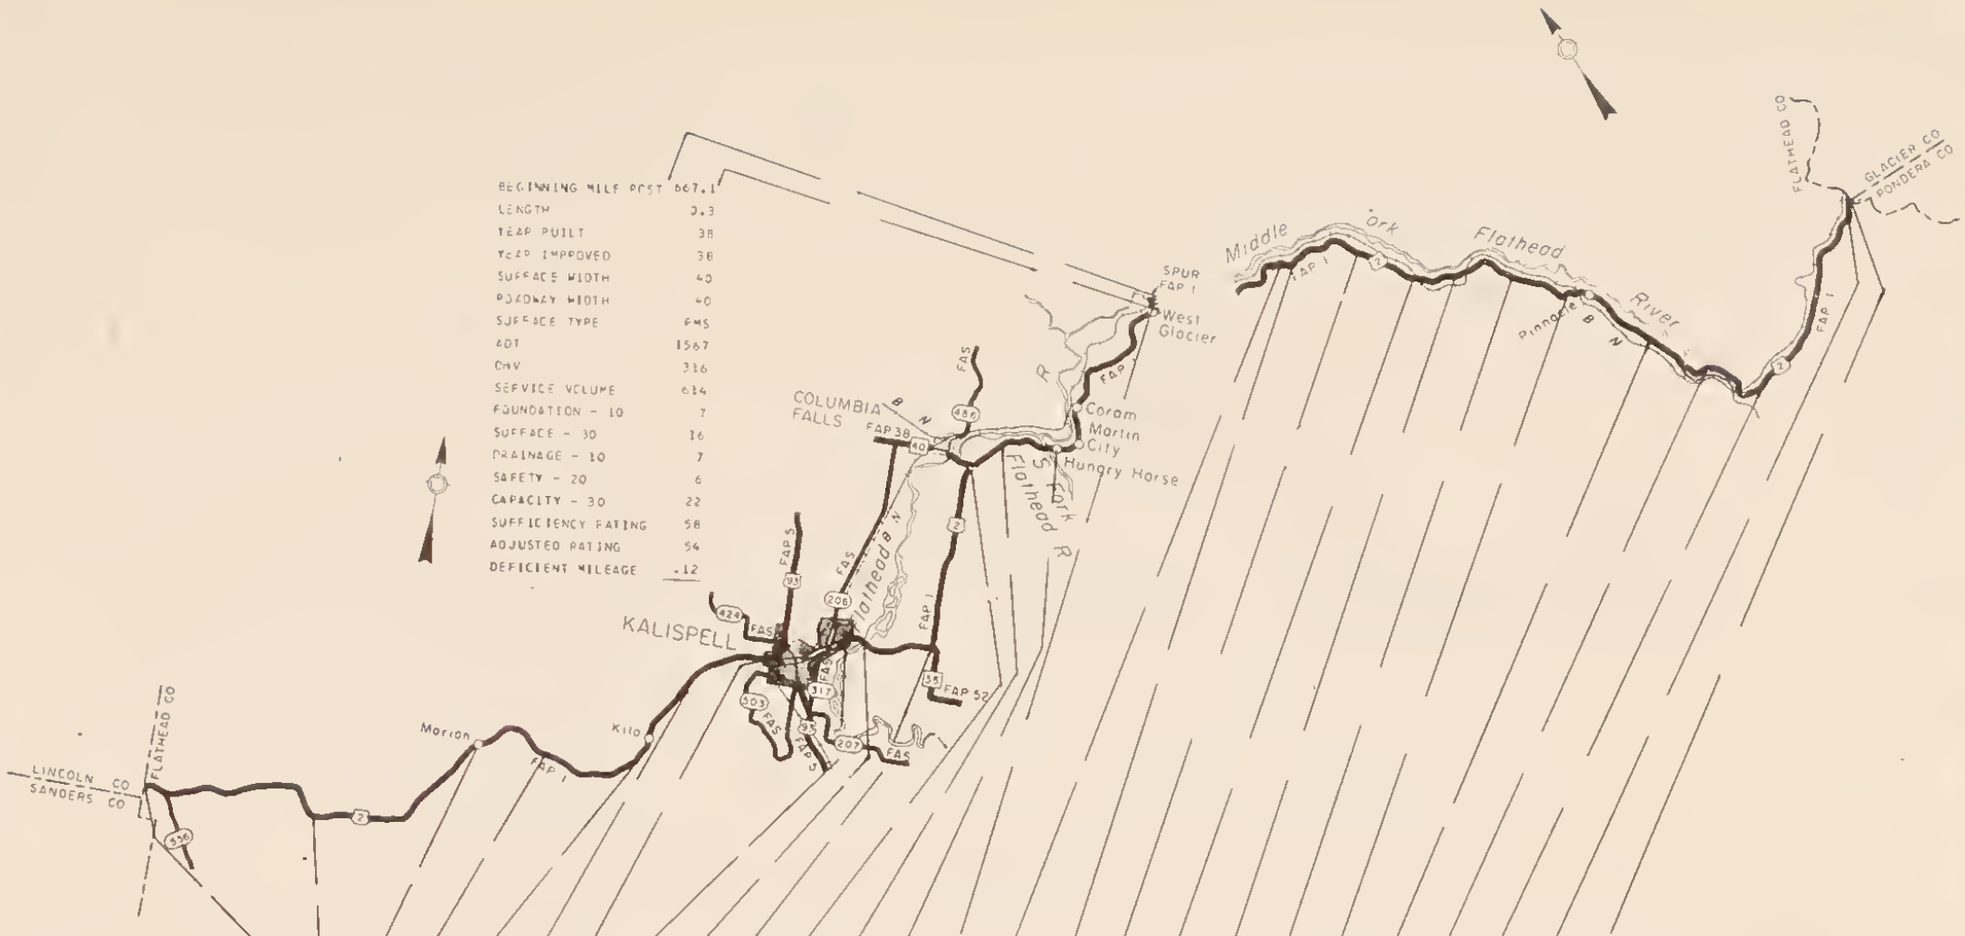

BEGINNING MILE POST	80.3	89.5	99.4	103.1	106.4	113.3	119.6	123.2	124.6	128.3	138.3	140.0	142.5	153.4	156.6	157.1	159.5	164.7	166.2	169.0	171.1	177.6	180.5	184.2	197.1	BEGINNING MILE POST
LENGTH	9.1	9.8	3.7	3.2	6.8	6.2	3.6	1.4	3.6	10.0	1.7	2.4	10.8	3.2	0.5	2.3	5.2	1.5	2.8	2.1	6.4	2.8	3.6	12.2	0.6	LENGTH
YEAR BUILT	52	36	47	40	49	49	U	67	40	34	34	29	31	48	65	48	49	49	49	75	66	69	33	67	52	YEAR BUILT
YEAR IMPROVED	52	57	61	63	63	51	R	67	64	51	66	65	34	49	65	49	59	59	59	75	66	69	35	67	70	YEAR IMPROVED
SURFACE WIDTH	28	24	24	24	24	24	B	44	30	22	24	24	20	24	24	24	26	26	26	32	32	34	18	32	26	SURFACE WIDTH
ROADWAY WIDTH	28	25	30	24	27	31	A	44	30	24	30	24	24	28	28	28	26	26	26	32	32	34	20	32	26	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	1047	1076	1286	1354	1455	2018		3505	3230	2415	4122	3673	2480	975	952	936	899	892	892	852	883	782	700	738	778	ADT
DHV	136	135	167	176	189	262		490	516	461	787	701	473	186	181	178	171	170	170	170	168	149	133	140	148	DHV
SERVICE VOLUME	212	249	292	249	198	452		731	327	716	365	556	415	129	378	154	357	357	384	476	428	456	199	575	324	SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	0	3		9	3	0	0	4	0	6	7	6	5	6	5	5	7	10	0	7	8	FOUNDATION - 10
SURFACE - 30	14	13	15	14	12	14		27	13	10	13	16	12	19	23	17	18	19	19	28	23	27	8	21	25	SURFACE - 30
DRAINAGE - 10	7	6	7	8	8	8		10	8	8	8	10	5	7	10	7	8	10	10	10	10	10	3	10	10	DRAINAGE - 10
SAFETY - 20	5	4	13	8	4	8		7	4	4	7	1	1	2	0	20	12	3	1	20	20	20	0	6	0	SAFETY - 20
CAPACITY - 30	20	22	21	19	16	21		20	6	20	0	11	12	8	23	13	23	23	23	25	24	25	20	26	23	CAPACITY - 30
SUFFICIENCY RATING	46	45	56	49	40	54		73	34	42	41	42	31	42	63	63	66	61	58	92	84	92	31	70	66	SUFFICIENCY RATING
ADJUSTED RATING	45	44	53	46	36	48		65	25	35	15	32	24	41	62	63	66	61	58	92	84	92	32	71	67	ADJUSTED RATING
DEFICIENT MILEAGE	4.95	5.41	1.66	1.66	4.12	2.88		.37	2.39	5.83	1.22	1.41	7.51	1.65	.15	.86	1.77	.59	1.19	.16	1.03	.23	2.50	3.67	.21	DEFICIENT MILEAGE

FAP ROUTE NO 1
& W GLACIER SPUR
SHEET 2 OF 7

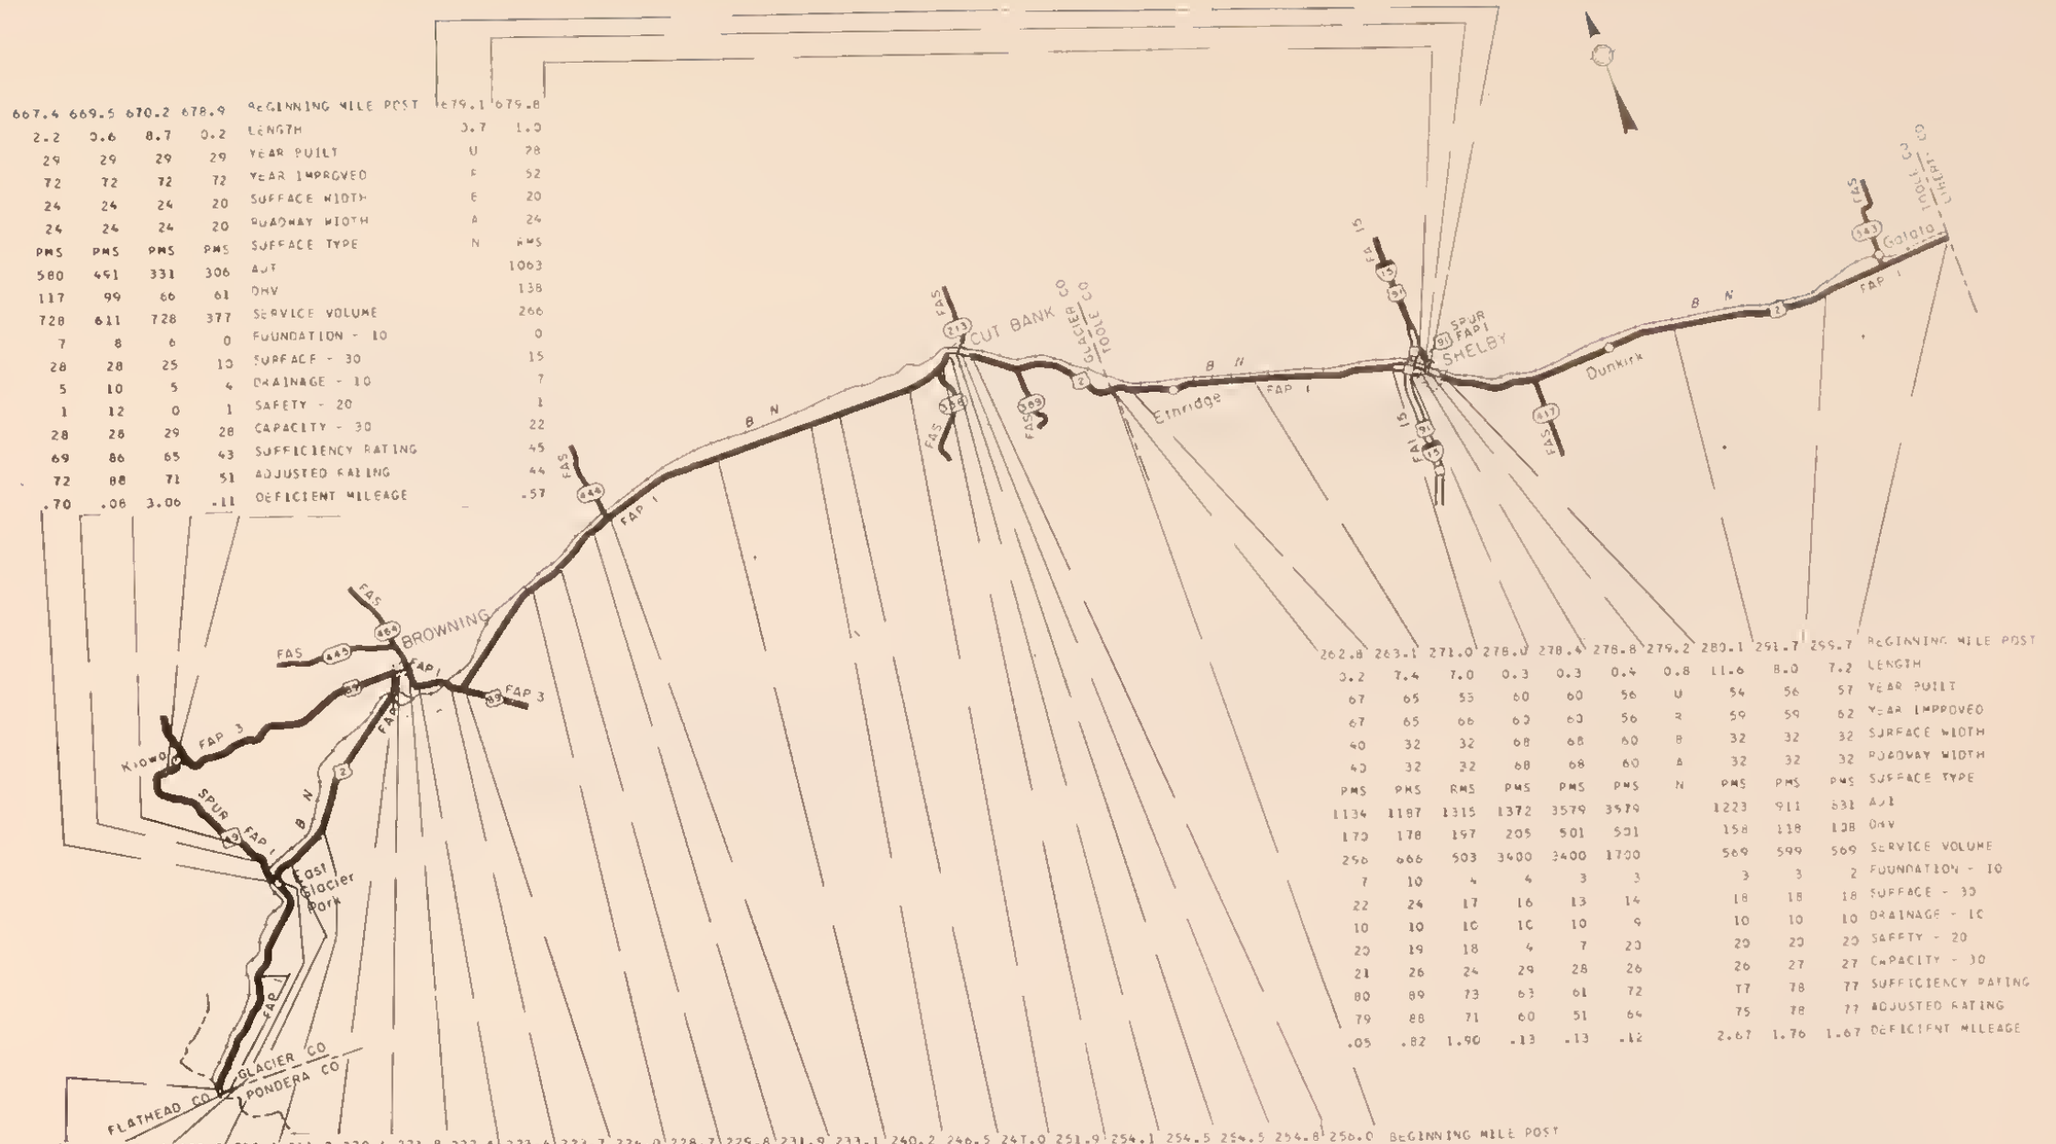

667.4	669.5	670.2	678.9	BEGINNING MILE POST
2.2	0.6	8.7	0.2	LENGTH
29	29	29	29	YEAR BUILT
72	72	72	72	YEAR IMPROVED
24	24	24	20	SURFACE WIDTH
24	24	24	20	ROADWAY WIDTH
PMS	PMS	PMS	PMS	SURFACE TYPE
580	491	331	306	ADT
117	99	66	61	DHV
728	611	728	377	SERVICE VOLUME
7	8	6	0	FOUNDATION - 10
28	28	25	10	SURFACE - 30
5	10	5	4	DRAINAGE - 10
1	12	0	1	SAFETY - 20
28	28	29	28	CAPACITY - 30
69	86	65	43	SUFFICIENCY RATING
72	88	71	51	ADJUSTED RATING
.70	.08	3.06	.11	DEFICIENT MILEAGE

679.1	679.8	BEGINNING MILE POST
3.7	1.0	LENGTH
U	78	YEAR BUILT
F	52	YEAR IMPROVED
E	20	SURFACE WIDTH
A	24	ROADWAY WIDTH
N	PMS	SURFACE TYPE
	1063	ADT
	138	DHV
	266	SERVICE VOLUME
	0	FOUNDATION - 10
	15	SURFACE - 30
	7	DRAINAGE - 10
	1	SAFETY - 20
	22	CAPACITY - 30
	45	SUFFICIENCY RATING
	44	ADJUSTED RATING
	.57	DEFICIENT MILEAGE

262.8	263.1	271.0	278.0	278.4	278.8	279.2	280.1	291.7	299.7	BEGINNING MILE POST
0.2	7.4	7.0	0.3	0.3	0.4	0.8	11.6	8.0	7.2	LENGTH
67	65	55	60	60	56	U	54	56	57	YEAR BUILT
67	65	66	60	60	56	R	59	59	62	YEAR IMPROVED
40	32	32	68	68	60	B	32	32	32	SURFACE WIDTH
40	32	32	68	68	60	A	32	32	32	ROADWAY WIDTH
PMS	PMS	PMS	PMS	PMS	PMS	N	PMS	PMS	PMS	SURFACE TYPE
1134	1187	1315	1372	3579	3579		1223	911	831	ADT
170	178	197	205	501	501		158	118	108	DHV
256	666	503	3400	3400	1700		569	599	569	SERVICE VOLUME
7	10	4	4	3	3		3	3	2	FOUNDATION - 10
22	24	17	16	13	14		18	18	18	SURFACE - 30
10	10	10	10	10	9		10	10	10	DRAINAGE - 10
20	19	18	4	7	20		20	20	20	SAFETY - 20
21	26	24	29	28	26		26	27	27	CAPACITY - 30
80	89	73	63	61	72		77	78	77	SUFFICIENCY RATING
79	88	71	60	51	64		75	78	77	ADJUSTED RATING
.05	.82	1.90	.13	.13	.12		2.67	1.76	1.67	DEFICIENT MILEAGE

197.8	204.3	209.2	210.1	211.3	220.4	221.8	222.6	223.4	223.7	224.0	228.7	229.8	231.9	233.1	240.2	246.5	247.0	251.9	254.1	254.5	254.5	254.8	256.0	BEGINNING MILE POST
6.3	4.8	0.8	1.2	9.1	1.3	0.7	0.8	1.9	0.1	4.9	1.0	2.1	1.2	7.0	6.2	0.4	4.9	2.1	0.4	0.1	0.2	1.1	6.8	LENGTH
52	63	63	43	39	45	U	35	32	60	35	57	25	50	25	27	61	27	72	55	U	55	U	67	YEAR BUILT
70	63	63	62	54	45	P	53	70	60	61	57	63	63	61	60	61	61	72	55	P	55	R	67	YEAR IMPROVED
26	32	32	26	26	24	B	24	22	32	22	24	24	24	24	24	32	24	50	42	S	42	B	40	SURFACE WIDTH
26	32	32	30	30	24	A	24	24	32	24	32	24	30	24	24	35	24	50	42	A	42	A	40	ROADWAY WIDTH
PMS	PMS	PMS	RMS	RMS	RMS	N	RMS	RMS	PMS	RMS	PMS	RMS	RMS	RMS	RMS	RMS	RMS	PMS	PMS	N	PMS	N	PMS	SURFACE TYPE
866	997	1161	1160	1152	1762		3352	2776	2215	1447	1321	1309	1306	1288	1273	1264	1376	1685	2220		3033		1499	ADT
165	190	221	221	220	343		653	535	423	231	209	209	208	206	190	189	206	252	266		363		224	DHV
264	441	478	353	353	278		423	254	464	324	680	478	530	805	534	680	534	272	335		817		244	SERVICE VOLUME
5	4	6	0	0	0		3	4	8	0	4	0	6	0	0	5	0	10	5		5		7	FOUNDATION - 10
19	15	21	16	13	13		16	18	23	12	16	12	17	10	12	14	15	30	17		17		22	SURFACE - 30
10	10	10	9	8	7		9	9	10	8	10	5	10	7	4	10	6	10	10		10		10	DRAINAGE - 10
2	4	1	1	1	2		1	2	20	3	20	1	12	3	3	10	2	3	4		20		20	SAFETY - 20
21	24	23	21	21	11		7	0	16	19	25	23	24	26	25	26	24	16	18		23		16	CAPACITY - 30
57	57	61	47	43	33		36	33	77	42	75	41	69	46	44	65	47	65	54		75		75	SUFFICIENCY RATING
57	56	55	45	41	28		27	26	72	38	75	38	66	43	41	63	44	65	47		66		72	ADJUSTED RATING
2.74	2.10	.34	.64	5.21	.93		.56	1.29	.34	2.85	.46	1.25	.37	3.81	3.52	.17	2.62	.65	.18		.05		1.70	DEFICIENT MILEAGE

FAP ROUTE NO 1
& E GLACIER SPUR
SHEET 3 OF 7

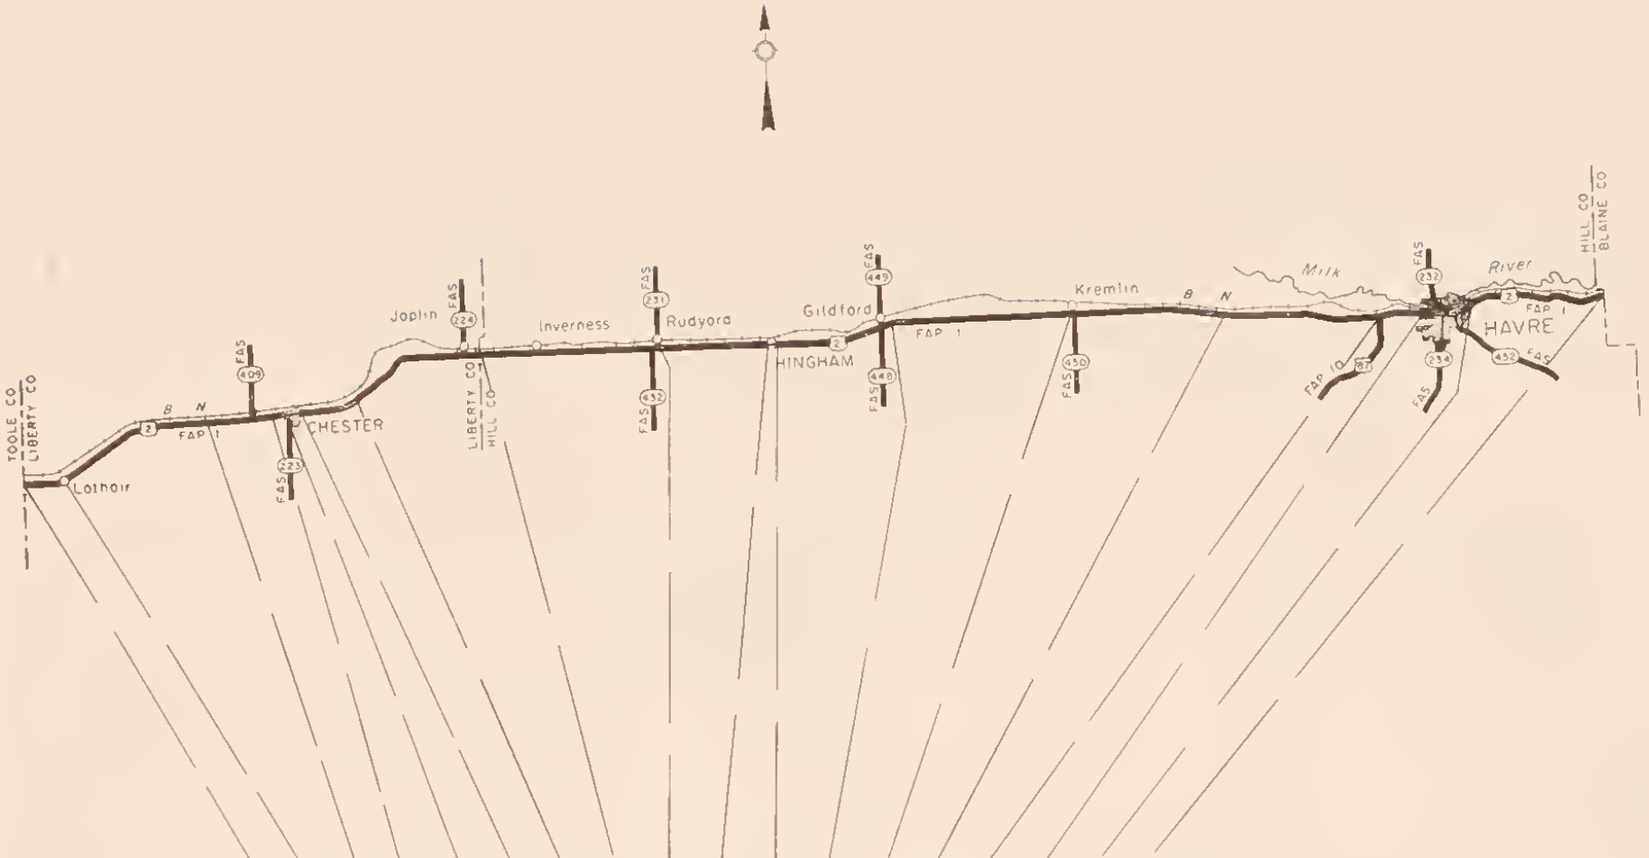

BEGINNING MILE POST	307.0	308.9	315.3	321.0	321.7	322.6	326.4	332.6	341.9	347.7	348.2	354.5	363.5	372.1	379.1	380.6	382.7	BEGINNING MILE POST
LENGTH	0.9	7.2	5.7	0.7	0.8	3.7	6.1	9.2	5.8	0.5	6.3	8.9	8.5	7.0	1.5	2.1	7.2	LENGTH
YEAR BUILT	57	47	47	U	U	U	U	71	60	U	60	36	36	60	52	U	46	YEAR BUILT
YEAR IMPROVED	62	60	60	N	R	N	N	71	60	R	60	59	70	60	52	R	54	YEAR IMPROVED
SURFACE WIDTH	32	26	26	D C	B	D C	D C	40	32	B	32	26	28	32	40	B	24	SURFACE WIDTH
ROADWAY WIDTH	32	26	26	E O	A	E C	E O	40	32	A	32	31	32	32	40	A	30	ROADWAY WIDTH
SURFACE TYPE	PMS	RMS	RMS	R N	N	P N	P N	PMS	PMS	N	PMS	RMS	RMS	PMS	RMS	N	PMS	SURFACE TYPE
ADT	816	789	796	S		S	S	960	1223		969	973	1228	1998	3709		2255	ADT
DHV	106	102	103	T		T	T	124	158		125	126	159	259	396		293	DHV
SERVICE VOLUME	629	442	500	R		R	R	244	666		621	489	696	698	654		655	SERVICE VOLUME
FOUNDATION - 10	4	5	7	U		U	U	9	8		8	5	7	4	0		7	FOUNDATION - 10
SURFACE - 30	17	17	18	C		C	C	28	23		22	17	18	18	12		21	SURFACE - 30
DRAINAGE - 10	10	10	10	T		T	T	10	10		10	10	10	10	10		10	DRAINAGE - 10
SAFETY - 20	10	2	4	I		I	I	4	19		18	1	5	13	10		4	SAFETY - 20
CAPACITY - 30	27	27	27	O		O	O	22	26		27	26	27	24	21		23	CAPACITY - 30
SUFFICIENCY RATING	68	61	66	N		N	N	73	86		85	59	67	69	54		65	SUFFICIENCY RATING
ADJUSTED RATING	68	62	67					72	85		84	58	65	64	44		59	ADJUSTED RATING
DEFICIENT MILEAGE	.31	2.83	1.96					2.50	.81		.95	3.67	2.83	2.17	.69		2.52	DEFICIENT MILEAGE

FAP ROUTE NO 1
SHEET 4 OF 7

BEGINNING MILE POST	391.0	393.8	403.5	404.0	408.3	413.4	414.0	421.3	423.9	424.6	424.7	429.0	435.1	440.0	446.3	453.6	454.5	457.6	466.7	471.6	472.4	481.3	489.0	499.1	500.0	BEGINNING MILE POST
LENGTH	2.8	9.7	0.5	4.2	5.0	0.5	7.3	2.5	0.7	0.1	4.3	5.2	4.6	6.4	7.3	0.7	3.1	9.0	4.9	0.6	8.9	7.6	9.9	0.9	1.5	LENGTH
YEAR BUILT	46	38	U	44	40	49	56	39	68	U	68	36	25	35	73	U	49	63	53	U	67	67	67	U	55	YEAR BUILT
YEAR IMPROVED	54	59	R	56	56	56	73	62	68	R	68	62	71	71	73	R	49	63	53	R	67	67	67	P	55	YEAR IMPROVED
SURFACE WIDTH	24	24	B	28	28	32	32	26	40	B	40	28	22	24	40	B	24	32	24	B	40	40	40	B	24	SURFACE WIDTH
ROADWAY WIDTH	31	30	A	30	30	32	32	31	40	A	40	30	24	24	40	A	26	32	30	A	40	40	40	A	28	ROADWAY WIDTH
SURFACE TYPE	PMS	RMS	N	PMS	PMS	PMS	PMS	RMS	PMS	N	PMS	RMS	RMS	BST	PMS	N	RMS	PMS	RMS	N	PMS	PMS	PMS	N	RMS	SURFACE TYPE
ADT	2076	2154		1924	1665	1614	1501	1476	1794		1770	1059	1033	1012	1025		1077	1071	1384		1305	1080	1064		1132	ADT
OHV	269	280		250	216	209	195	191	233		233	137	134	131	133		140	139	179		169	140	143		152	OHV
SERVICE VOLUME	600	663		663	612	629	666	612	281		281	453	324	469	281		539	616	600		234	247	234		510	SERVICE VOLUME
FOUNDATION - 10	5	5		6	6	5	9	6	9		10	5	3	3	8		3	5	2		9	8	8		0	FOUNDATION - 10
SURFACE - 30	18	18		17	16	18	30	16	28		27	14	17	18	27		14	20	17		26	25	24		12	SURFACE - 30
DRAINAGE - 10	10	10		10	10	10	10	10	10		10	10	4	6	10		6	10	10		10	10	10		10	DRAINAGE - 10
SAFETY - 20	8	15		12	7	1	20	10	20		8	2	1	11	20		7	10	20		20	17	17		15	SAFETY - 20
CAPACITY - 30	23	24		24	25	25	26	25	18		18	25	24	26	23		26	27	26		19	21	21		26	CAPACITY - 30
SUFFICIENCY RATING	64	72		69	64	59	93	67	85		73	56	49	64	88		58	72	75		84	81	80		63	SUFFICIENCY RATING
ADJUSTED RATING	58	67		64	60	55	94	64	82		69	55	48	63	87		57	71	77		87	80	79		61	ADJUSTED RATING
DEFICIENT MILEAGE	1.02	2.72		1.31	1.83	.24	.26	.84	.11		1.17	2.33	2.28	2.32	.88		1.31	2.52	1.23		1.43	1.45	1.99		.56	DEFICIENT MILEAGE

FAP ROUTE NO 1
SHEET 5 OF 7

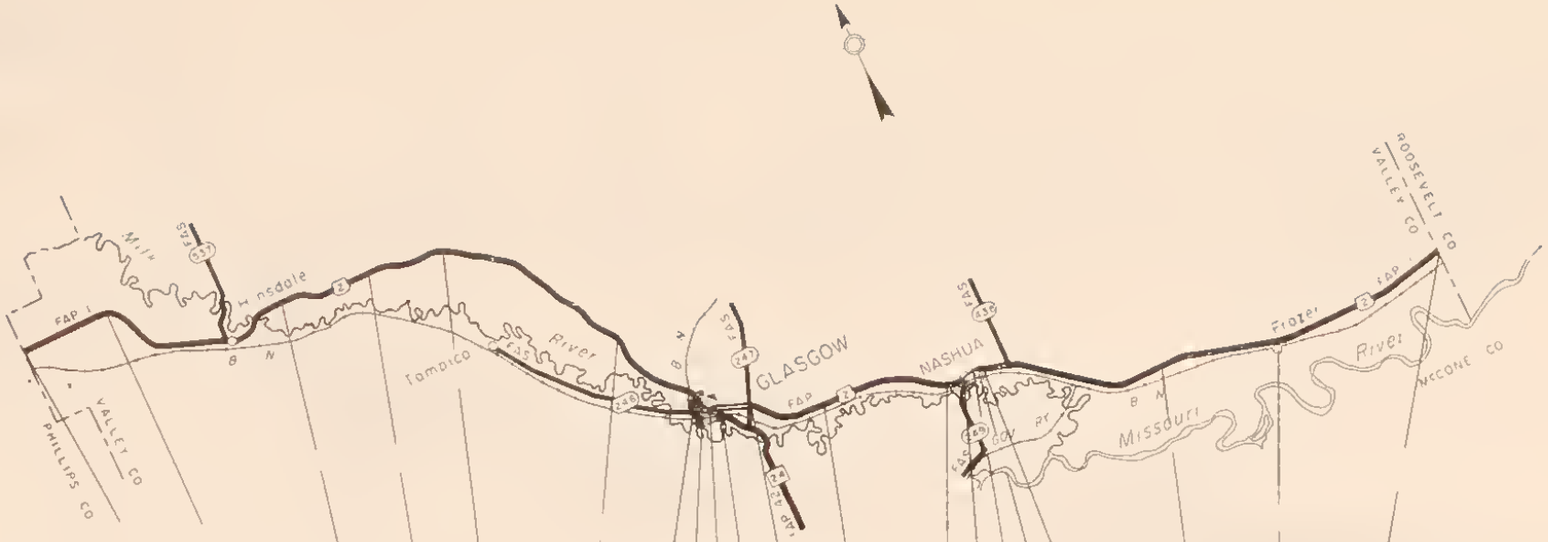

BEGINNING MILE POST	501.4	508.0	515.6	521.4	526.5	537.6	540.9	541.0	541.4	542.4	542.8	546.2	554.6	555.1	555.8	555.9	556.1	564.8	573.0	BEGINNING MILE POST
LENGTH	6.5	7.5	5.7	5.1	11.1	3.3	0.1	0.3	1.0	1.3	2.4	8.4	0.5	0.7	0.1	0.1	8.6	8.1	8.0	LENGTH
YEAR BUILT	55	66	50	50	50	48	U	48	U	62	62	53	56	U	56	U	56	61	56	YEAR BUILT
YEAR IMPROVED	55	66	55	55	55	48	R	48	R	62	62	53	70	R	70	R	70	61	61	YEAR IMPROVED
SURFACE WIDTH	24	40	24	24	24	24	B	24	B	68	36	24	32	B	32	B	32	32	24	SURFACE WIDTH
ROADWAY WIDTH	28	40	27	27	27	26	B	26	A	68	36	30	32	A	32	A	32	32	32	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	PMS	N	PMS	N	PMS	PMS	PMS	PMS	N	PMS	N	PMS	PMS	PMS	SURFACE TYPE
ADT	1055	1080	1017	988	1070	2156		5835		3093	1636	1330	1233		1329		1183	1144	1068	ADT
DHV	142	145	137	133	144	291		788		417	216	179	166		179		159	154	144	DHV
SERVICE VOLUME	435	260	461	413	277	695		638		2088	616	631	544		528		656	720	680	SERVICE VOLUME
FOUNDATION - 10	0	6	5	3	3	0		0		6	5	0	0		9		7	6	0	FOUNDATION - 10
SURFACE - 30	18	22	18	18	16	10		15		24	19	15	26		27		23	23	13	SURFACE - 30
DRAINAGE - 10	8	10	10	10	10	10		8		10	10	10	10		10		10	10	10	DRAINAGE - 10
SAFETY - 20	20	17	8	4	2	7		20		6	4	15	11		20		10	7	20	SAFETY - 20
CAPACITY - 30	25	22	26	25	24	24		11		27	25	26	25		25		27	27	27	CAPACITY - 30
SUFFICIENCY RATING	72	76	67	60	53	51		54		73	53	66	71		91		77	73	70	SUFFICIENCY RATING
ADJUSTED RATING	71	77	66	59	52	44		40		66	55	63	76		90		74	71	64	ADJUSTED RATING
DEFICIENT MILEAGE	1.84	1.67	1.91	2.04	5.22	1.63		.15		.37	.85	2.85	.09		.10		1.44	1.29	2.41	DEFICIENT MILEAGE

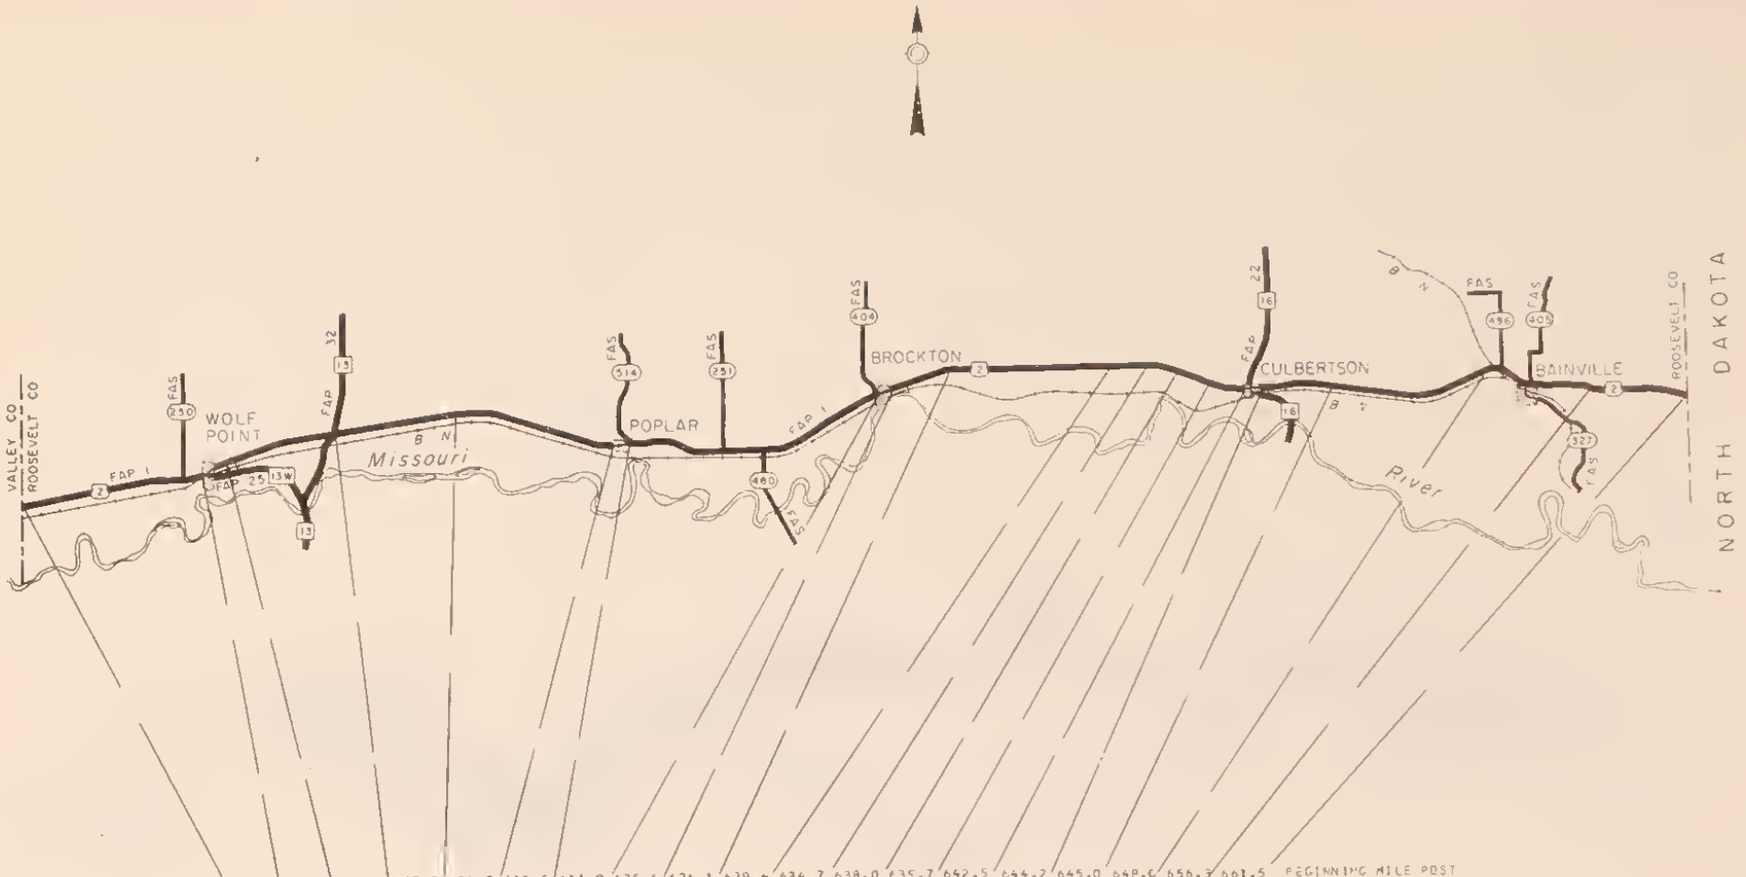

BEGINNING MILE POST	581.0	590.3	591.6	597.2	601.7	611.5	611.9	625.6	626.1	629.4	634.7	638.0	639.7	642.5	644.2	645.0	648.6	656.3	661.5	BEGINNING MILE POST
LENGTH	9.3	1.0	5.7	4.5	9.7	0.3	13.6	0.5	3.2	5.3	3.2	1.7	2.7	1.7	0.7	3.0	8.2	5.2	5.6	LENGTH
YEAR BUILT	57	U	58	58	60	U	70	U	43	46	52	52	52	56	U	56	61	55	55	YEAR BUILT
YEAR IMPROVED	61	P	58	58	60	P	70	P	57	50	52	52	52	61	P	61	61	62	62	YEAR IMPROVED
SURFACE WIDTH	32	B	32	32	32	B	40	B	24	24	24	24	24	32	B	32	32	32	32	SURFACE WIDTH
ROADWAY WIDTH	32	A	32	32	32	A	40	A	30	32	30	30	30	32	A	32	32	32	32	ROADWAY WIDTH
SURFACE TYPE	PMS	N	PMS	PMS	PMS	N	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	N	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	1342		1941	1496	1452		1244		761	674	725	751	766	971		950	757	751	791	ADT
DHV	181		232	179	174		161		98	87	94	97	99	126		128	102	101	106	DHV
SERVICE VOLUME	616		648	648	660		281		367	266	367	612	367	380		629	629	536	352	SERVICE VOLUME
FOUNDATION - 10	3		7	6	6		7		0	0	0	0	0	0		7	5	8	8	FOUNDATION - 10
SURFACE - 30	17		20	18	20		23		13	12	13	14	12	13		17	16	19	19	SURFACE - 30
DRAINAGE - 10	10		10	10	10		10		10	9	10	10	10	10		10	10	10	10	DRAINAGE - 10
SAFETY - 20	17		12	18	9		20		3	2	11	11	14	20		20	20	5	7	SAFETY - 20
CAPACITY - 30	26		25	26	26		21		26	25	26	28	26	25		27	28	27	25	CAPACITY - 30
SUFFICIENCY RATING	73		74	78	71		81		52	46	60	63	62	68		81	79	69	69	SUFFICIENCY RATING
ADJUSTED RATING	70		69	75	66		79		53	50	61	64	63	67		80	80	70	70	ADJUSTED RATING
DEFICIENT MILEAGE	2.51		1.50	1.00	2.83		2.60		1.55	2.79	1.31	.63	1.03	.54		.57	1.74	1.62	1.73	DEFICIENT MILEAGE

FAP ROUTE NO 1
SHEET 7 OF 7

BEGINNING MILE POST		705.4	705.6	706.7	707.0	707.1
LENGTH		0.2	1.0	0.2	0.1	0.8
YEAR BUILT	N		31	U	31	U
YEAR IMPROVED	O		52	R	52	R
SURFACE WIDTH	N		22	B	22	B
ROADWAY WIDTH		E	24	A	24	A
SURFACE TYPE		X	RMS	N	RMS	N
ADT		I	210		235	
DHV		S	27		30	
SERVICE VOLUME		T	544		716	
FOUNDATION - 10		E	0		0	
SURFACE - 30		N	6		6	
DRAINAGE - 10		T	5		5	
SAFETY - 20			5		0	
CAPACITY - 30			29		29	
SUFFICIENCY RATING			65		60	
ADJUSTED RATING			55		49	
DEFICIENT MILEAGE			.56		.03	

FAP ROUTE NO 2
SHEET 1 OF 7

BEGINNING MILE POST	137.0	137.2	141.6	142.2	143.8	144.5	144.8	145.5	146.4	147.0	150.7	151.0	151.4	152.5	154.4	BEGINNING MILE POST
LENGTH	0.1	3.6	0.5	1.5	0.6	0.2	0.6	0.9	0.5	3.6	0.4	0.3	1.4	1.5	1.1	LENGTH
YEAR BUILT	70	33	70	33	70	36	70	36	70	36	70	64	36	64	U	YEAR BUILT
YEAR IMPROVED	70	34	70	34	70	36	70	36	70	36	70	64	36	64	P	YEAR IMPROVED
SURFACE WIDTH	30	22	30	24	30	22	30	22	30	22	30	24	22	24	A	SURFACE WIDTH
ROADWAY WIDTH	30	26	30	26	30	32	30	32	30	32	30	24	32	24	N	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	PMS	PMS	AMS	PMS	BST	PMS	PMS	BST	PMS		SURFACE TYPE
ADT	148	148	148	148	148	148	148	148	148	148	148	148	148	148		ADT
DHV	19	19	19	19	19	19	19	19	19	19	19	19	19	19		DHV
SERVICE VOLUME	604	414	291	375	226	432	226	388	446	201	459	391	336	193		SERVICE VOLUME
FOUNDATION - 10	10	0	7	0	6	0	8	0	7	0	5	6	0	7		FOUNDATION - 10
SURFACE - 30	28	11	22	8	20	9	23	12	22	11	16	14	11	17		SURFACE - 30
DRAINAGE - 10	10	7	5	6	10	10	10	7	10	6	10	10	7	10		DRAINAGE - 10
SAFETY - 20	0	2	20	3	1	20	1	20	20	1	20	20	3	1		SAFETY - 20
CAPACITY - 30	30	29	29	29	29	29	29	29	29	29	29	29	29	29		CAPACITY - 30
SUFFICIENCY RATING	78	49	83	46	66	68	71	68	88	47	60	79	50	64		SUFFICIENCY RATING
ADJUSTED RATING	87	62	90	59	78	79	82	79	93	60	88	87	62	76		ADJUSTED RATING
DEFICIENT MILEAGE	.03	1.87	.08	.86	.29	.08	.19	.30	.06	1.53	.08	.07	.74	.55		DEFICIENT MILEAGE

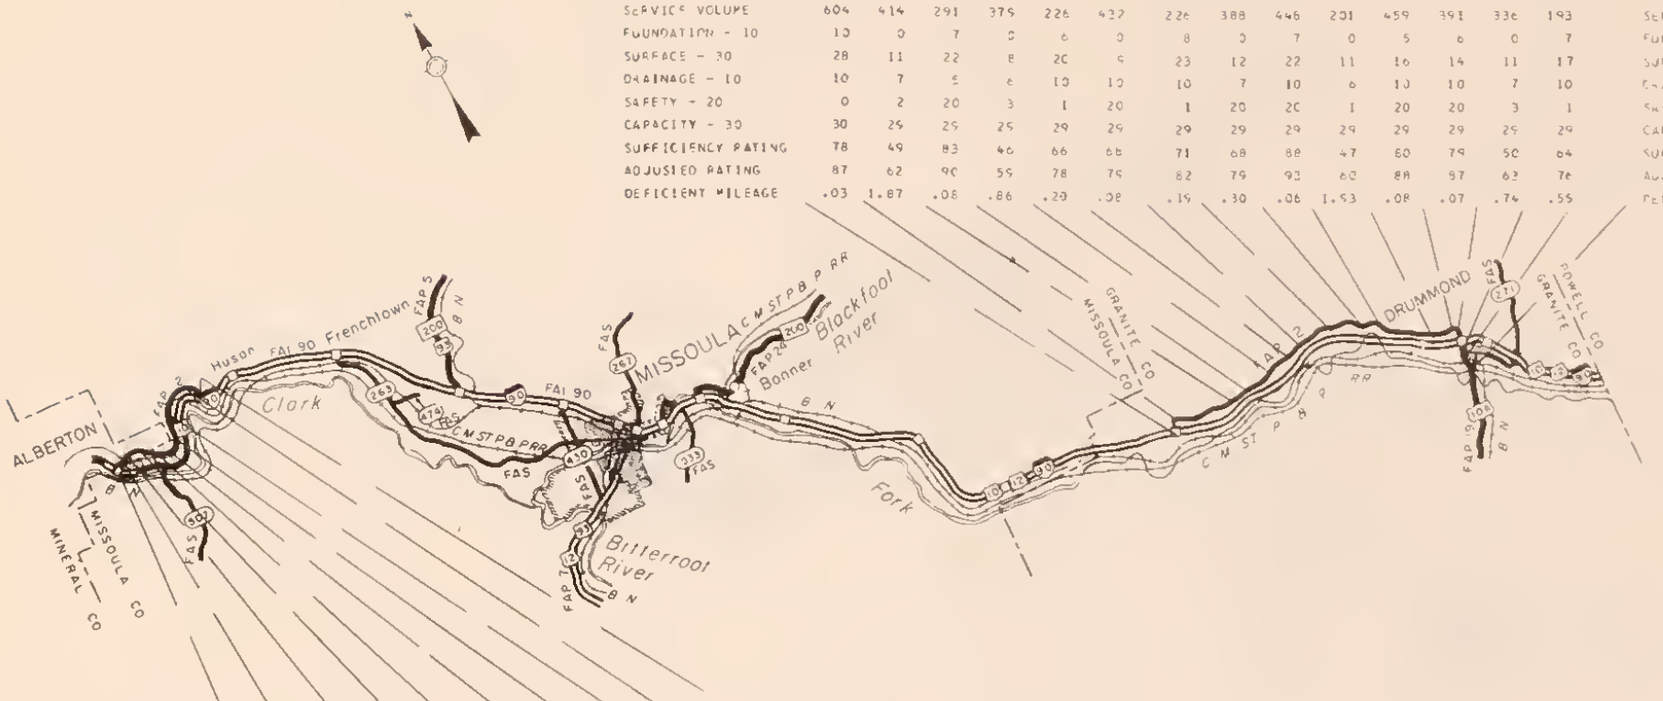

BEGINNING MILE POST	75.1	75.2	76.5	77.3	78.6	78.7	79.4	80.0	83.1	BEGINNING MILE POST
LENGTH	0.1	1.3	0.7	1.2	0.1	0.6	0.5	3.1	0.3	LENGTH
YEAR BUILT	63	U	26	26	26	63	64	39	64	YEAR BUILT
YEAR IMPROVED	63	P	34	34	45	63	64	61	64	YEAR IMPROVED
SURFACE WIDTH	28	A	20	20	24	24	24	24	30	SURFACE WIDTH
ROADWAY WIDTH	28	A	20	20	30	24	24	30	30	ROADWAY WIDTH
SURFACE TYPE	PMS	N	BST	BST	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	589		118	163	229	267	324	466	509	ADT
DHV	76		15	21	29	34	42	60	66	DHV
SERVICE VOLUME	666		257	186	199	220	286	486	199	SERVICE VOLUME
FOUNDATION - 10	10		0	0	0	5	7	3	10	FOUNDATION - 10
SURFACE - 30	27		13	14	14	17	16	14	26	SURFACE - 30
DRAINAGE - 10	10		3	3	7	10	10	7	10	DRAINAGE - 10
SAFETY - 20	20		1	20	20	0	1	20	0	SAFETY - 20
CAPACITY - 30	29		29	28	28	28	29	28	25	CAPACITY - 30
SUFFICIENCY RATING	95		45	65	69	63	67	72	71	SUFFICIENCY RATING
ADJUSTED RATING	95		61	76	77	68	67	76	76	ADJUSTED RATING
DEFICIENT MILEAGE	.00		.42	.44	.09	.24	.22	.87	.09	DEFICIENT MILEAGE

FAP ROUTE NO 2
SHEET 2 OF 7

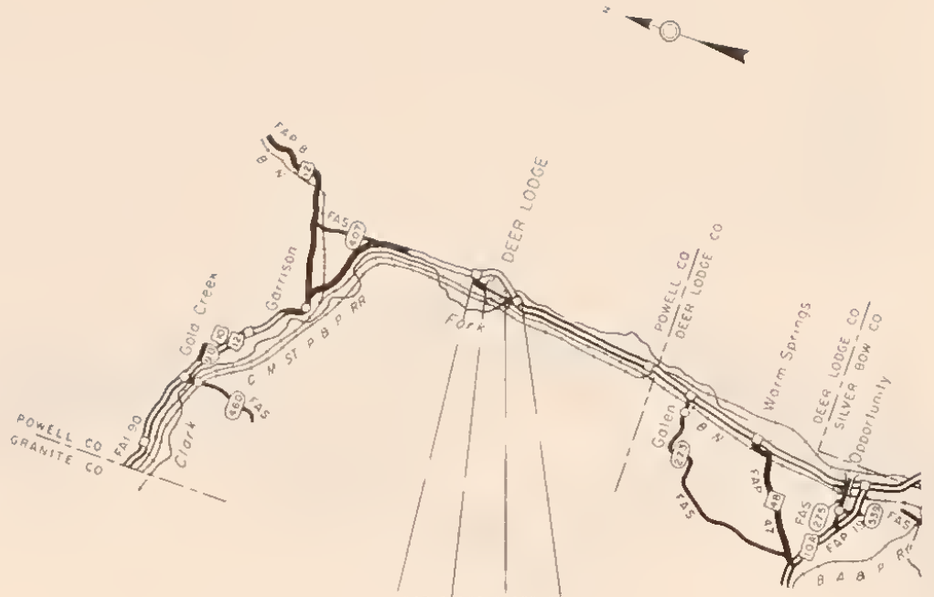

BEGINNING MILE POST	187.9	188.8	189.8
LENGTH	0.9	1.0	1.0
YEAR BUILT	62	U	48
YEAR IMPROVED	62	P	48
SURFACE WIDTH	36	B	24
ROADWAY WIDTH	36	A	32
SURFACE TYPE	PMS	N	PMS
ADT	1920		1674
DHV	249		243
SERVICE VOLUME	667		896
FOUNDATION - 10	9		3
SURFACE - 30	26		13
DRAINAGE - 10	10		10
SAFETY - 20	20		7
CAPACITY - 30	24		26
SUFFICIENCY RATING	89		59
ADJUSTED RATING	86		54
EFFICIENT MILEAGE	.10		.42

FAP ROUTE NO 2
SHEET 3 OF 7

BEGINNING MILE POST	299.6	301.3	302.2	307.6	310.7	311.6	315.5	319.6	319.7	324.1	25.
LENGTH	1.7	0.9	5.4	3.0	0.9	3.9	2.6	0.1	3.9	1.4	2.4
YEAR BUILT	31	U	22	23	U	22	37	66	C	52	71
YEAR IMPROVED	31	9	56	56	F	58	37	66	F	54	71
SURFACE WIDTH	22	F	24	24	B	24	24	[illegible]	I	24	28
ROADWAY WIDTH	28	A	28	24	A	24	30	48	N	34	28
SURFACE TYPE	BMS	N	BMS	BMS	M	BMS	BMS	BMS	C	BMS	BMS
ADT	370		544	595		2155	3472	6973	I	411	435
DHV	48		70	90		285	450	906	D	53	55
SERVICE VOLUME	603		520	603		514	631	1840	E	860	514
FOUNDATION - 10	9		9	9		4	4	9	N	5	9
SURFACE - 30	11		14	15		17	18	23	T	18	27
DRAINAGE - 10	8		8	8		8	10	10		8	10
SAFETY - 20	6		2	15		4	2	20		5	3
CAPACITY - 30	29		28	28		22	19	23		29	28
SUFFICIENCY RATING	54		52	64		55	53	89		65	77
ADJUSTED RATING	60		55	66		48	43	87		70	80
DEFICIENT MILEAGE	.78		2.63	1.09		1.94	1.73	.02		.52	.16

BEGINNING MILE POST	296.3	291.5	294.2
LENGTH	0.8	2.9	4.7
YEAR BUILT	64	23	31
YEAR IMPROVED	69	52	31
SURFACE WIDTH	32	22	22
ROADWAY WIDTH	32	26	28
SURFACE TYPE	BMS	BMS	BMS
ADT	518	459	327
DHV	67	59	42
SERVICE VOLUME	681	493	485
FOUNDATION - 10	7	0	0
SURFACE - 30	21	13	12
DRAINAGE - 10	10	9	8
SAFETY - 20	1	1	1
CAPACITY - 30	25	28	25
SUFFICIENCY RATING	66	50	50
ADJUSTED RATING	71	55	57
DEFICIENT MILEAGE	.27	1.47	2.37

FAP ROUTE NO 2
SHEET 4 OF 7

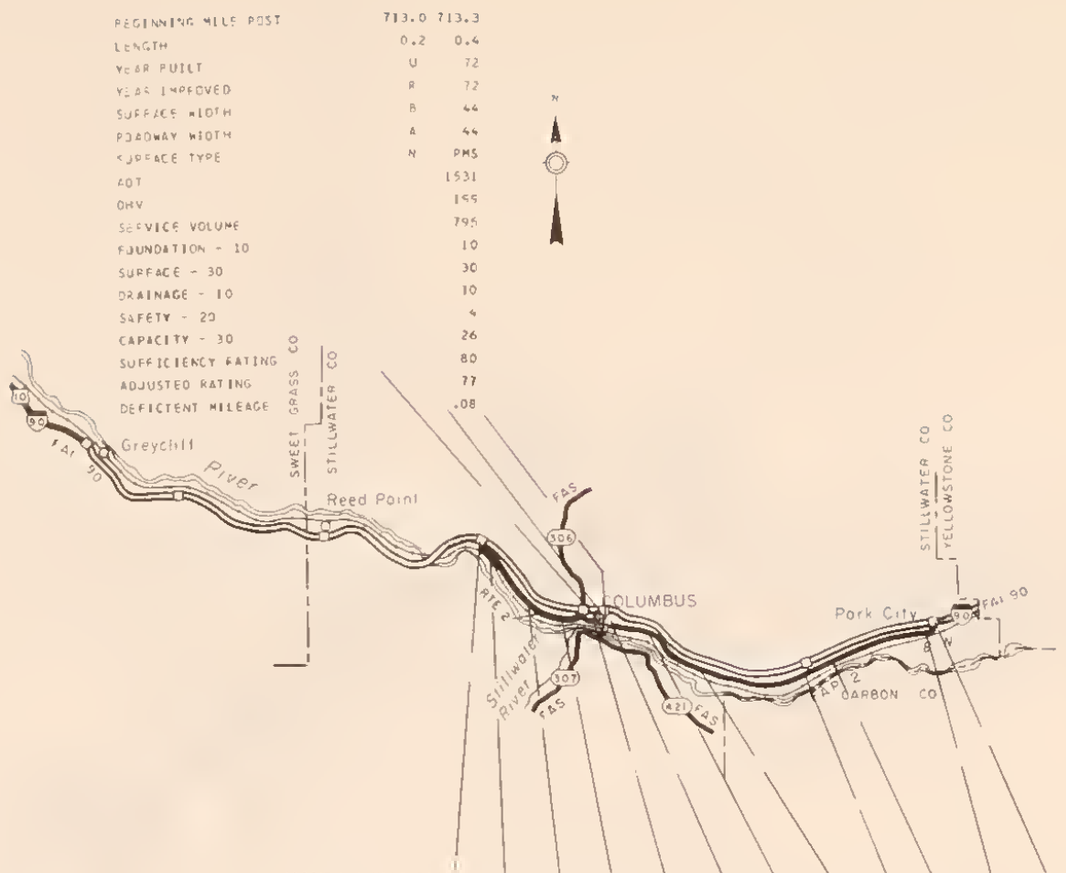

BEGINNING MILE POST	713.0	713.3
LENGTH	0.2	0.4
YEAR BUILT	U	72
YEAR IMPROVED	R	72
SURFACE WIDTH	B	44
ROADWAY WIDTH	A	44
SURFACE TYPE	N	PMS
ADT		1531
DHV		155
SERVICE VOLUME		795
FOUNDATION - 10		10
SURFACE - 30		30
DRAINAGE - 10		10
SAFETY - 20		4
CAPACITY - 30		26
SUFFICIENCY RATING		80
ADJUSTED RATING		77
DEFICIENT MILEAGE		.08

BEGINNING MILE POST	412.6	412.8	417.8	419.3	420.9	421.6	423.1	426.0	432.8	433.4	439.1	BEGINNING MILE POST
LENGTH	0.2	5.3	1.3	1.5	0.6	1.5	2.9	6.7	0.5	5.6	0.2	LENGTH
YEAR BUILT	72	31	51	31	U	47	35	28	55	28	67	YEAR BUILT
YEAR IMPROVED	72	55	51	56	P	63	53	57	55	55	67	YEAR IMPROVED
SURFACE WIDTH	30	24	34	22	B	24	24	22	24	24	34	SURFACE WIDTH
ROADWAY WIDTH	30	30	34	30	A	30	28	26	32	26	34	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	BST	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	182	245	321	484		253	191	277	340	394	446	ADT
DHV	23	31	41	62		32	24	36	44	51	57	DHV
SERVICE VOLUME	289	522	426	427		348	348	462	731	585	383	SERVICE VOLUME
FOUNDATION - 10	10	2	2	0		4	0	0	7	2	10	FOUNDATION - 10
SURFACE - 30	28	15	13	13		15	13	15	14	16	26	SURFACE - 30
DRAINAGE - 10	10	5	8	7		8	7	5	10	4	10	DRAINAGE - 10
SAFETY - 20	1	2	5	1		10	1	1	20	2	20	SAFETY - 20
CAPACITY - 30	29	25	29	28		29	29	29	29	29	28	CAPACITY - 30
SUFFICIENCY RATING	78	53	57	49		66	50	56	76	53	94	SUFFICIENCY RATING
ADJUSTED RATING	86	62	64	53		74	61	56	81	59	95	ADJUSTED RATING
DEFICIENT MILEAGE	.35	2.91	.59	.78		.51	1.47	3.39	.12	2.67	.01	DEFICIENT MILEAGE

FAP ROUTE NO 2
SHEET 5 OF 7

BEGINNING MILE POST	538.9	540.8	548.8	551.3	556.8	560.8	565.1
LENGTH	2.5	8.0	2.5	5.5	4.0	4.2	0.7
YEAR BUILT	64	33	33	36	41	41	5C
YEAR IMPROVED	64	56	56	42	41	41	56
SURFACE WIDTH	30	22	22	26	24	24	24
ROADWAY WIDTH	30	24	24	30	31	31	32
SURFACE TYPE	PMS	RMS	RMS	RMS	RMS	RMS	PMS
ADT	589	236	172	166	225	536	705
DHV	76	30	22	21	29	69	91
SERVICE VOLUME	664	544	280	672	705	434	656
FOUNDATION - 10	6	0	0	0	0	0	5
SURFACE - 30	24	13	11	11	14	13	16
DRAINAGE - 10	10	7	6	7	8	7	8
SAFETY - 20	5	5	1	4	10	11	5
CAPACITY - 30	28	29	29	30	29	28	28
SUFFICIENCY RATING	73	54	47	52	61	55	62
ADJUSTED RATING	75	64	59	64	TO	62	63
DEFICIENT MILEAGE	.67	3.68	1.32	2.64	1.56	1.75	.29

571.0	571.6	571.9	574.8	576.2	576.7	577.2	578.2	579.9	580.3	580.6	587.7	588.0	BEGINNING MILE POST
0.5	0.3	2.8	1.3	0.4	0.5	C.9	1.7	0.3	0.3	7.C	0.3	3.7	LENGTH
28	71	28	31	71	31	31	31	71	71	31	71	31	YEAR BUILT
52	71	52	40	71	47	47	47	71	71	47	71	73	YEAR IMPROVED
20	28	20	22	28	20	20	20	28	24	20	28	24	SURFACE WIDTH
20	28	20	26	28	26	26	26	2E	28	26	28	24	ROADWAY WIDTH
RMS	PMS	RMS	RMS	PMS	RMS	RMS	RMS	PMS	PMS	RMS	PMS	BST	SURFACE TYPE
120	120	123	127	129	207	283	264	140	128	128	128	128	ADT
15	15	15	16	16	26	36	34	18	16	16	16	16	DHV
384	720	593	761	277	291	218	335	990	277	379	356	575	SERVICE VOLUME
0	10	0	0	9	0	0	0	10	9	0	10	0	FOUNDATION - 10
11	30	10	10	26	8	11	9	30	28	10	30	14	SURFACE - 30
3	10	3	5	7	5	5	5	10	10	4	10	4	DRAINAGE - 10
0	20	8	1	0	0	1	1	20	C	2	0	8	SAFETY - 20
29	30	30	30	29	29	28	28	30	29	29	29	30	CAPACITY - 30
43	100	51	46	73	42	45	43	100	76	45	79	56	SUFFICIENCY RATING
57	100	65	60	84	52	53	52	100	86	59	88	70	ADJUSTED RATING
.29	.00	1.39	.75	.12	.33	.50	.98	.00	.08	3.86	.07	1.65	DEFICIENT MILEAGE

FAP ROUTE NO 2
SHEET 6 OF 7

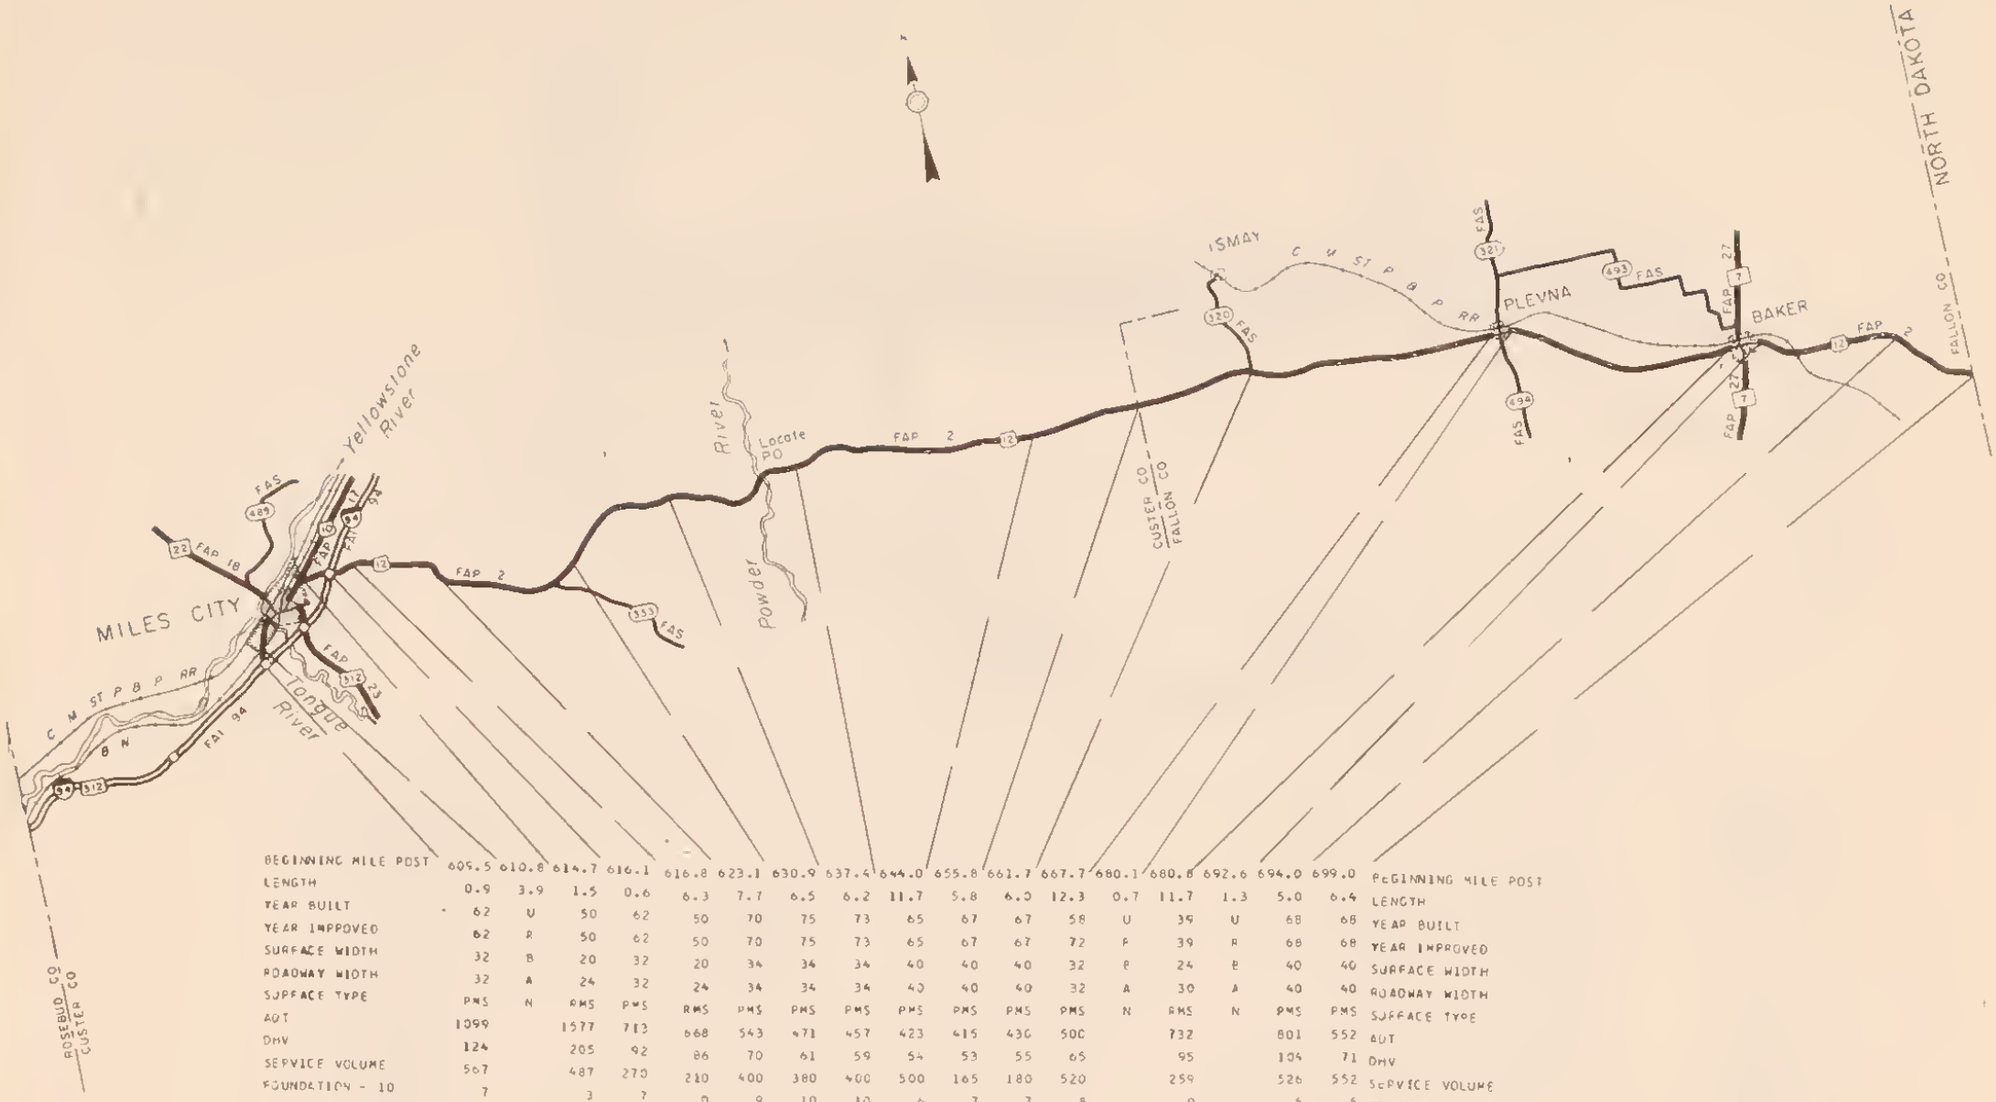

BEGINNING MILE POST	609.5	610.8	614.7	616.1	616.8	623.1	630.9	637.4	644.0	655.8	661.7	667.7	680.1	680.8	692.6	694.0	699.0	BEGINNING MILE POST
LENGTH	0.9	3.9	1.5	0.6	6.3	7.7	6.5	6.2	11.7	5.8	6.0	12.3	0.7	11.7	1.3	5.0	6.4	LENGTH
YEAR BUILT	62	U	50	62	50	70	75	73	65	67	67	58	U	39	U	68	68	YEAR BUILT
YEAR IMPROVED	62	R	50	62	50	70	75	73	65	67	67	72	P	39	R	68	68	YEAR IMPROVED
SURFACE WIDTH	32	B	20	32	20	34	34	34	40	40	40	32	B	24	B	40	40	SURFACE WIDTH
ROADWAY WIDTH	32	A	24	32	24	34	34	34	40	40	40	32	A	30	A	40	40	ROADWAY WIDTH
SURFACE TYPE	PMS	N	RMS	PMS	RMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	N	RMS	N	PMS	PMS	SURFACE TYPE
ADT	1099		1577	713	668	543	471	457	423	415	430	500		732		801	552	ADT
DHV	124		205	92	86	70	61	59	54	53	55	65		95		104	71	DHV
SERVICE VOLUME	567		487	270	210	400	380	400	500	165	180	520		259		526	552	SERVICE VOLUME
FOUNDATION - 10	7		3	7	0	9	10	10	6	7	7	8		0		5	5	FOUNDATION - 10
SURFACE - 30	18		17	23	15	27	30	30	18	21	21	27		11		20	20	SURFACE - 30
DRAINAGE - 10	10		10	10	9	10	10	10	10	10	10	10		10		10	10	DRAINAGE - 10
SAFETY - 20	6		8	7	1	13	11	20	12	20	20	15		2		5	9	SAFETY - 20
CAPACITY - 30	27		24	25	24	27	26	28	28	25	25	28		24		27	28	CAPACITY - 30
SUFFICIENCY RATING	68		62	72	49	86	84	98	74	83	83	88		47		67	72	SUFFICIENCY RATING
ADJUSTED RATING	67		58	73	51	67	90	98	78	86	86	89		48		68	75	ADJUSTED RATING
DEFICIENT MILEAGE	.29		.58	.15	3.22	1.08	.71	.12	3.05	.99	1.02	1.48		6.21		1.60	1.80	DEFICIENT MILEAGE

FAP ROUTE NO 2
SHEET 7 OF 7

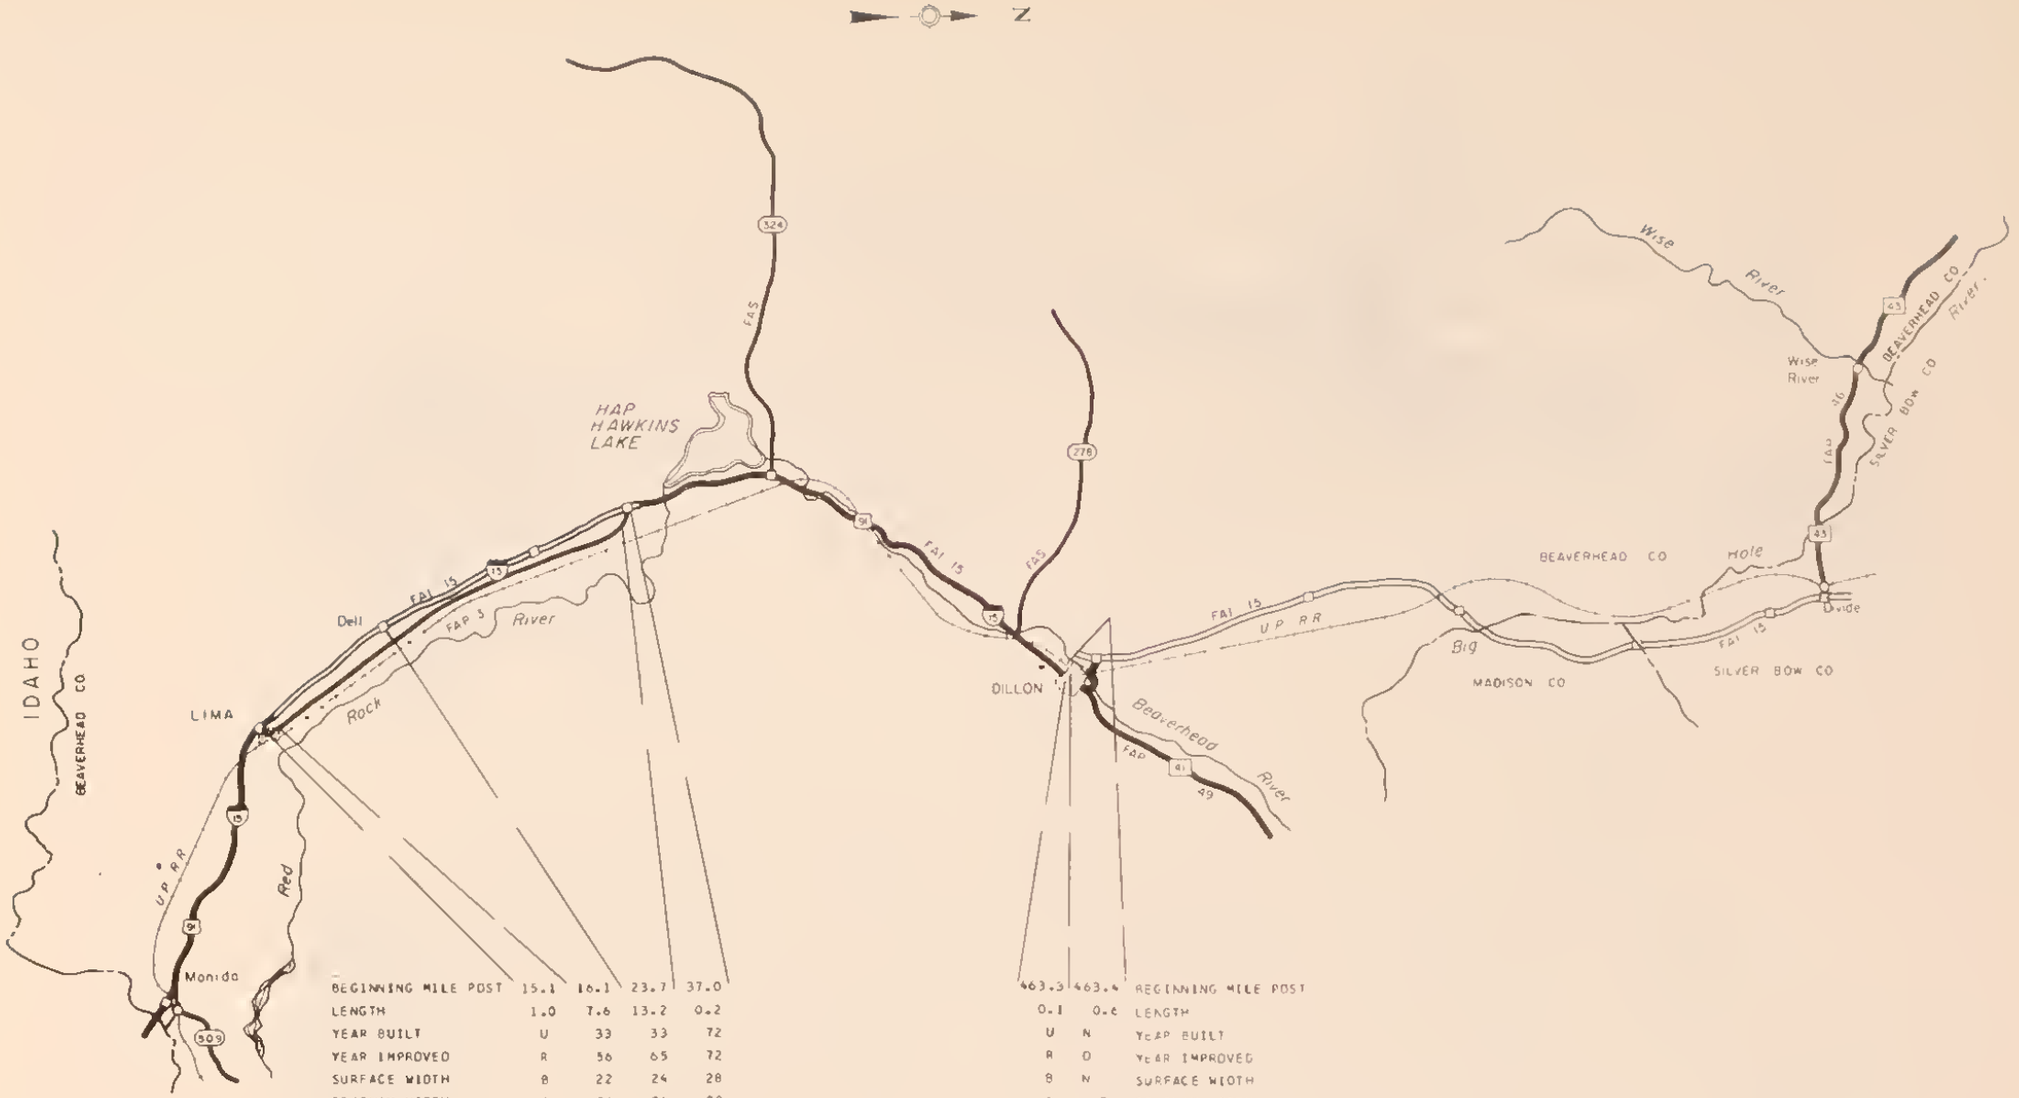

BEGINNING MILE POST	15.1	16.1	23.7	37.0
LENGTH	1.0	7.6	13.2	0.2
YEAR BUILT	U	33	33	72
YEAR IMPROVED	R	56	65	72
SURFACE WIDTH	B	22	24	28
ROADWAY WIDTH	A	24	26	28
SURFACE TYPE	N	RMS	RMS	PMS
ADT		114	55	59
DHV		14	7	7
SERVICE VOLUME		780	965	356
FOUNDATION - 10		0	0	10
SURFACE - 30		10	10	30
DRAINAGE - 10		4	5	10
SAFETY - 20		3	6	0
CAPACITY - 30		30	30	30
SUFFICIENCY RATING		47	51	80
ADJUSTED RATING		62	71	92
DEFICIENT MILEAGE		4.02	6.48	.04

463.3	463.4		BEGINNING MILE POST
0.1	0.6		LENGTH
U	N		YEAR BUILT
R	O		YEAR IMPROVED
B	N		SURFACE WIDTH
A	E		ROADWAY WIDTH
N	X		SURFACE TYPE
	I		ADT
	S		DHV
	T		SERVICE VOLUME
	E		FOUNDATION - 10
	N		SURFACE - 30
	T		DRAINAGE - 10
			SAFETY - 20
			CAPACITY - 30
			SUFFICIENCY RATING
			ADJUSTED RATING
			DEFICIENT MILEAGE

FAP ROUTE 3
SHEET 1 OF 5

BEGINNING MILE POST	133.8	182.1	182.5	182.8	183.3	183.8	184.0	184.6	186.1	187.6
LENGTH	0.2	0.8	0.2	0.5	0.4	0.3	0.5	1.4	1.4	0.1
YEAR BUILT	50	69	30	69	30	69	30	69	39	69
YEAR IMPROVED	50	69	69	69	69	69	69	69	69	69
SURFACE WIDTH	24	28	24	24	24	24	24	24	24	34
ROADWAY WIDTH	36	28	24	24	24	24	24	24	36	34
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS
ADT	573	505	505	505	505	505	505	505	505	505
DHV	74	65	65	65	65	65	65	65	65	65
SERVICE VOLUME	501	318	353	280	187	218	218	156	340	512
FOUNDATION - 10	0	10	4	9	5	8	5	8	5	10
SURFACE - 30	10	28	23	24	23	24	24	24	24	28
DRAINAGE - 10	8	10	6	10	6	10	7	9	8	10
SAFETY - 20	20	1	20	1	0	20	1	0	2	2
CAPACITY - 30	28	27	27	27	25	26	26	24	27	28
SUFFICIENCY RATING	66	76	80	71	55	88	63	65	66	78
ADJUSTED RATING	69	79	82	74	63	89	67	69	70	81
DEFICIENT MILEAGE	.09	.19	.04	.16	.17	.02	.19	.45	.49	.03

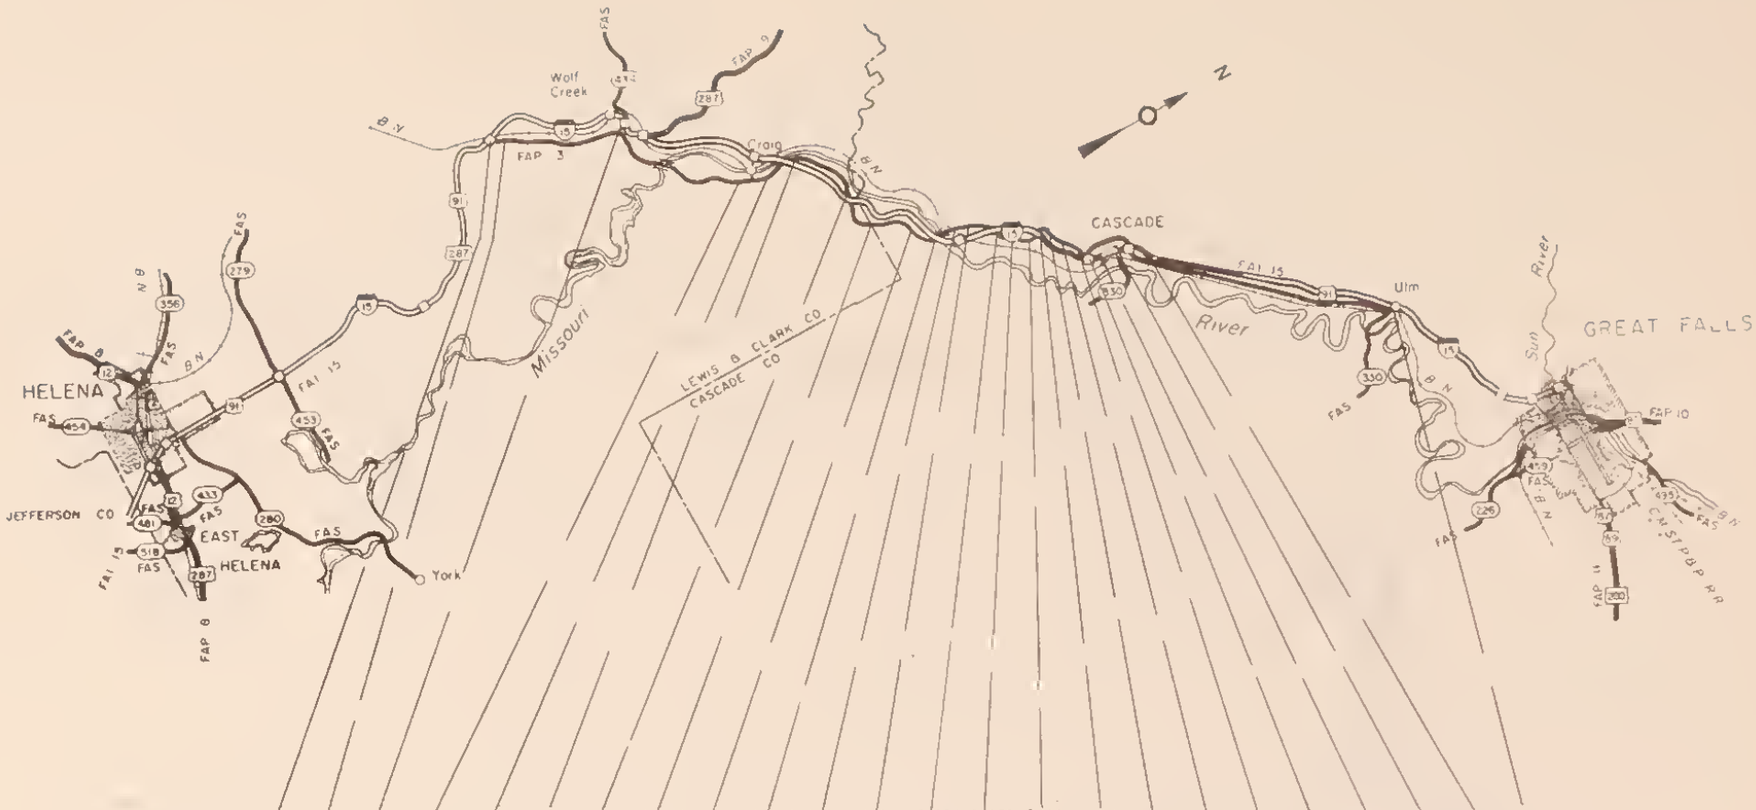

BEGINNING MILE POST	219.2	220.1	227.8	236.3	238.1	238.5	240.7	242.1	244.3	245.8	246.6	246.9	250.9	251.5	253.4	253.6	255.0	256.3	258.3	258.9	259.1	260.2	262.0
LENGTH	0.4	7.7	8.5	1.7	0.4	2.6	1.4	2.2	1.5	0.8	0.2	3.9	0.6	1.4	0.2	1.2	1.2	1.9	0.6	0.1	1.1	1.7	12.5
YEAR BUILT	65	35	35	33	67	69	33	33	72	68	68	33	68	33	63	33	63	33	63	33	U	24	24
YEAR IMPROVED	65	35	47	47	67	69	47	33	72	68	68	33	68	53	63	53	63	53	63	53	R	54	53
SURFACE WIDTH	24	20	24	24	24	24	24	24	26	24	24	20	24	20	24	24	24	20	24	24	B	22	24
ROADWAY WIDTH	24	24	26	26	24	24	26	26	26	24	24	24	24	24	24	28	24	24	24	28	A	24	24
SURFACE TYPE	PMS	PMS	RMS	RMS	PMS	PMS	RMS	RMS	PMS	PMS	PMS	PMS	PMS	RMS	PMS	RMS	PMS	RMS	PMS	PMS	N	RMS	RMS
ADT	45	55	135	125	125	125	126	138	158	170	127	117	107	102	58	95	90	82	77	493		60	63
DHV	13	17	42	39	33	32	24	22	24	25	19	17	16	15	14	14	13	12	23	149		9	9
SERVICE VOLUME	374	635	260	632	406	336	694	527	527	243	266	405	510	270	672	198	545	365	504	368		544	461
FOUNDATION - 10	10	0	0	0	10	10	0	0	10	10	10	0	10	0	10	0	5	0	10	0		0	0
SURFACE - 30	25	10	12	11	28	28	11	11	30	30	27	12	29	12	27	12	14	9	28	12		13	13
DRAINAGE - 10	10	5	6	4	10	10	4	3	10	10	10	4	10	6	10	6	8	7	10	10		3	4
SAFETY - 20	20	2	1	1	1	8	1	1	2	2	0	1	0	2	20	0	1	1	20	0		1	1
CAPACITY - 30	29	30	28	29	29	29	29	29	29	28	29	29	30	29	30	29	30	30	29	24		30	30
SUFFICIENCY RATING	94	47	47	45	78	85	45	44	81	80	76	46	79	49	97	47	58	47	97	46		47	48
ADJUSTED RATING	99	67	61	59	88	92	59	57	89	87	86	61	89	65	98	63	74	64	99	50		67	67
DEFICIENT MILEAGE	.02	4.08	4.51	.98	.09	.40	.79	1.24	.28	.16	.07	2.14	.14	.76	.00	.64	.54	1.05	.01	.09		.54	6.54

FAP ROUTE 3
SHEET 3 OF 5

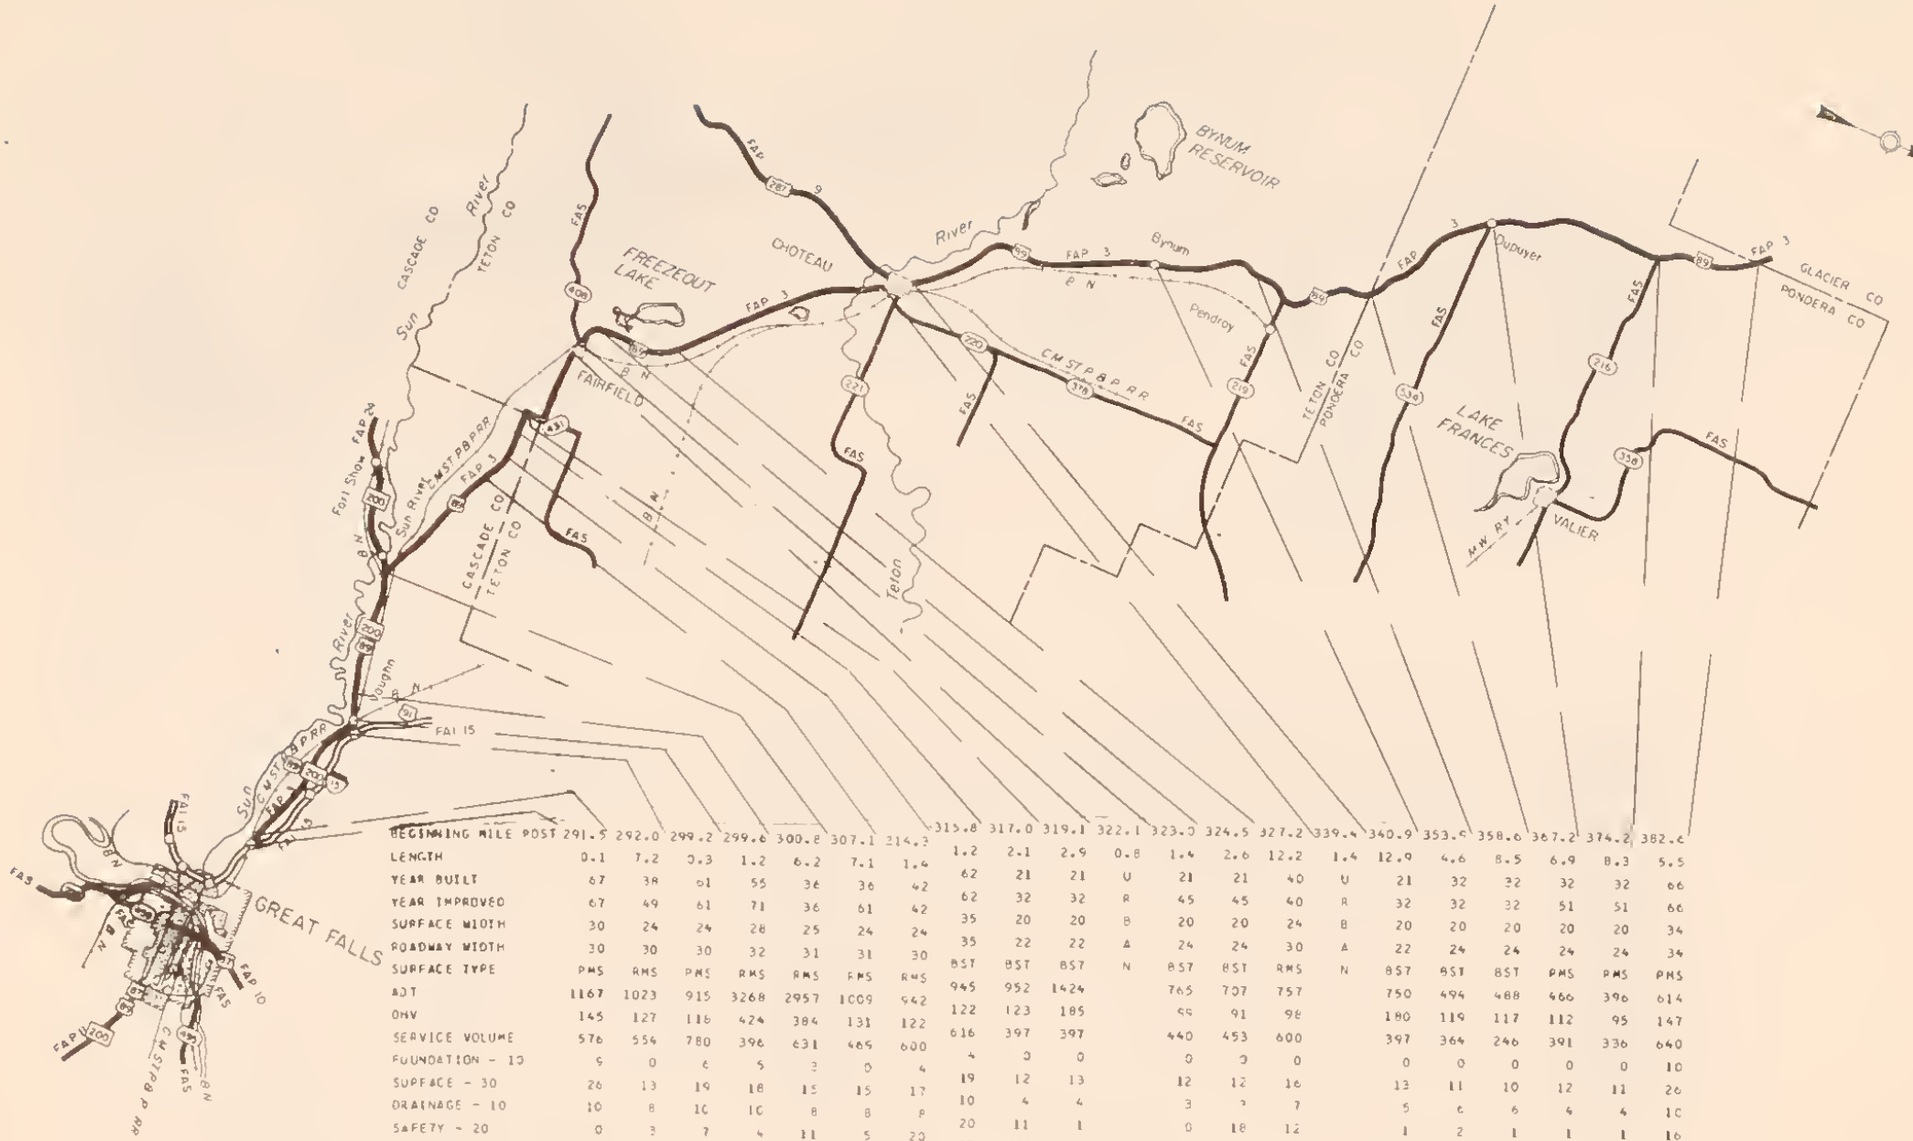

BEGINNING MILE POST	291.5	292.0	299.2	299.6	300.8	307.1	214.3	315.8	317.0	319.1	322.1	323.0	324.5	327.2	339.4	340.9	353.6	358.6	367.2	374.2	382.6
LENGTH	0.1	7.2	0.3	1.2	6.2	7.1	1.4	1.2	2.1	2.9	0.8	1.4	2.6	12.2	1.4	12.9	4.6	8.5	6.9	8.3	5.5
YEAR BUILT	67	38	61	55	36	36	42	62	21	21	U	21	21	40	U	21	32	32	32	32	66
YEAR IMPROVED	67	49	61	71	36	61	42	62	32	32	R	45	45	40	R	32	32	32	51	51	66
SURFACE WIDTH	30	24	24	28	25	24	24	35	20	20	B	20	20	24	B	20	20	20	20	20	34
ROADWAY WIDTH	30	30	30	32	31	31	30	35	22	22	A	24	24	30	A	22	24	24	24	24	34
SURFACE TYPE	PMS	RMS	PMS	RMS	RMS	RMS	RMS	BST	BST	BST	N	BST	BST	RMS	N	BST	BST	BST	PMS	PMS	PMS
ADT	1167	1023	915	3268	2957	1009	942	945	952	1424		765	707	757		750	494	488	466	396	614
DHV	145	127	116	424	384	131	122	122	123	185		95	91	98		180	119	117	112	95	147
SERVICE VOLUME	576	554	780	396	631	465	600	616	397	397		440	453	600		397	364	246	391	336	640
FOUNDATION - 10	9	0	6	5	3	0	4	4	0	0		0	0	0		0	0	0	0	0	10
SURFACE - 30	26	13	19	18	15	15	17	19	12	13		12	12	16		13	11	10	12	11	26
DRAINAGE - 10	10	8	10	10	8	8	8	10	4	4		3	3	7		5	6	6	4	4	10
SAFETY - 20	0	3	7	4	11	5	20	20	11	1		0	18	12		1	2	1	1	1	16
CAPACITY - 30	26	27	28	14	21	26	27	27	25	23		27	27	28		23	25	23	26	26	27
SUFFICIENCY RATING	71	51	70	51	58	54	76	60	52	41		42	60	63		42	44	40	43	42	85
ADJUSTED RATING	69	50	70	41	45	53	75	79	51	38		43	61	64		43	48	44	48	48	90
DEFICIENT MILEAGE	.03	3.56	.10	.60	2.61	3.28	.35	.24	1.01	1.74		.86	1.07	4.56		7.50	2.60	5.15	3.93	4.86	.61

FAP ROUTE NO 3
SHEET 4 OF 5

BEGINNING MILE POST	388.2	394.0	400.0	402.3	409.6	413.0	416.3	422.7	425.0	430.3	438.5	444.5	448.8	452.8	456.6	457.4	BEGINNING MILE POST
LENGTH	5.8	5.9	2.1	7.2	3.8	3.3	6.3	2.2	5.2	8.2	6.0	4.2	4.0	3.7	0.8	5.8	LENGTH
YEAR BUILT	68	66	51	60	C	35	35	29	28	28	58	64	56	56	61	52	YEAR BUILT
YEAR IMPROVED	68	66	51	60	O	51	51	35	68	40	64	64	64	56	61	52	YEAR IMPROVED
SURFACE WIDTH	34	34	26	32	I	22	22	20	24	18	44	32	32	24	28	22	SURFACE WIDTH
ROADWAY WIDTH	38	34	28	32	N	24	24	24	24	24	44	32	32	28	28	28	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	RMS	PMS	C	RMS	RMS	PMS	RMS	RMS	PMS	PMS	PMS	RMS	RMS	RMS	SURFACE TYPE
ADT	642	661	677	700	L	1096	781	701	834	882	1031	1163	1064	971	831	481	ADT
DHV	154	159	163	168	D	213	152	136	162	171	201	226	207	189	162	93	DHV
SERVICE VOLUME	525	506	454	529	E	854	452	556	351	280	273	597	630	523	554	500	SERVICE VOLUME
FOUNDATION - 10	10	10	5	5	N	0	0	0	0	0	7	8	8	3	7	3	FOUNDATION - 10
SURFACE - 30	27	28	17	21	T	10	10	10	13	9	23	24	24	17	22	15	SURFACE - 30
DRAINAGE - 10	10	10	10	10		8	8	8	4	4	10	10	10	9	10	10	DRAINAGE - 10
SAFETY - 20	17	7	5	9		5	1	1	0	0	2	5	3	3	9	20	SAFETY - 20
CAPACITY - 30	26	25	25	25		26	25	26	23	21	19	24	25	25	26	27	CAPACITY - 30
SUFFICIENCY RATING	80	80	62	70		49	44	45	40	34	61	71	70	57	74	75	SUFFICIENCY RATING
ADJUSTED RATING	91	81	64	71		47	45	47	40	34	60	69	69	56	74	78	ADJUSTED RATING
DEFICIENT MILEAGE	.58	1.18	.81	2.16		1.71	3.56	1.23	3.16	5.42	2.34	1.24	1.20	1.62	.22	1.46	DEFICIENT MILEAGE

FAP ROUTE NO 3
SHEET 5 OF 5

BEGINNING MILE POST	0.0	0.5	13.4	19.2	23.2	25.6	26.2	32.7	33.1	33.7	42.7	42.9	50.8	52.2	53.8	54.3	54.5
LENGTH	0.5	12.9	5.7	4.0	2.4	0.6	6.4	0.4	0.5	8.9	0.1	7.9	1.3	1.5	0.4	0.2	0.7
YEAR BUILT	49	56	59	72	72	U	23	U	54	68	66	49	49	22	64	64	U
YEAR IMPROVED	49	63	59	72	72	R	51	R	54	68	68	65	65	39	64	64	R
SURFACE WIDTH	24	32	32	32	40	B	22	B	24	40	40	24	28	24	68	68	B
ROADWAY WIDTH	30	32	32	32	40	A	24	A	32	40	40	32	32	30	68	68	A
SURFACE TYPE	RMS	PMS	PMS	PMS	PMS	N	RMS	N	RMS	PMS	PMS	RMS	PMS	RMS	PMS	PMS	N
ADT	841	838	868	1008	1577		1818		1902	2082	3777	3814	4336	5382	6368	4194	
DHV	109	108	112	131	205		236		247	270	491	495	563	699	788	545	
SERVICE VOLUME	648	569	599	448	286		453		896	696	432	580	616	652	1424	1424	
FOUNDATION - 10	8	4	0	8	9		3		4	8	9	5	4	3	7	8	
SURFACE - 30	21	18	15	28	28		13		16	25	27	18	18	15	22	24	
DRAINAGE - 10	10	10	10	10	10		6		10	10	10	10	9	7	10	10	
SAFETY - 20	10	10	14	16	20		4		20	15	3	11	14	2	4	4	
CAPACITY - 30	27	27	27	26	18		22		26	24	13	17	16	14	22	24	
SUFFICIENCY RATING	76	69	66	88	85		45		76	82	62	61	61	41	65	70	
ADJUSTED RATING	76	69	66	87	83		40		72	78	52	51	50	28	52	60	
DEFICIENT MILEAGE	.12	4.00	1.98	.48	.36		3.52		.14	1.60	.06	3.10	.54	.94	.15	.06	

55.3	57.3	57.9	BEGINNING MILE POST
2.0	0.5	1.2	LENGTH
23	23	64	YEAR BUILT
68	68	64	YEAR IMPROVED
55	55	30	SURFACE WIDTH
55	55	30	ROADWAY WIDTH
RMS	RMS	PMS	SURFACE TYPE
2868	2658	2595	ADT
372	345	337	DHV
872	289	506	SERVICE VOLUME
5	3	10	FOUNDATION - 10
18	18	28	SURFACE - 30
8	8	10	DRAINAGE - 10
4	1	0	SAFETY - 20
24	12	20	CAPACITY - 30
59	42	68	SUFFICIENCY RATING
51	34	61	ADJUSTED RATING
.65	.34	.06	DEFICIENT MILEAGE

FAP ROUTE NO 4
SHEET 1 OF 1

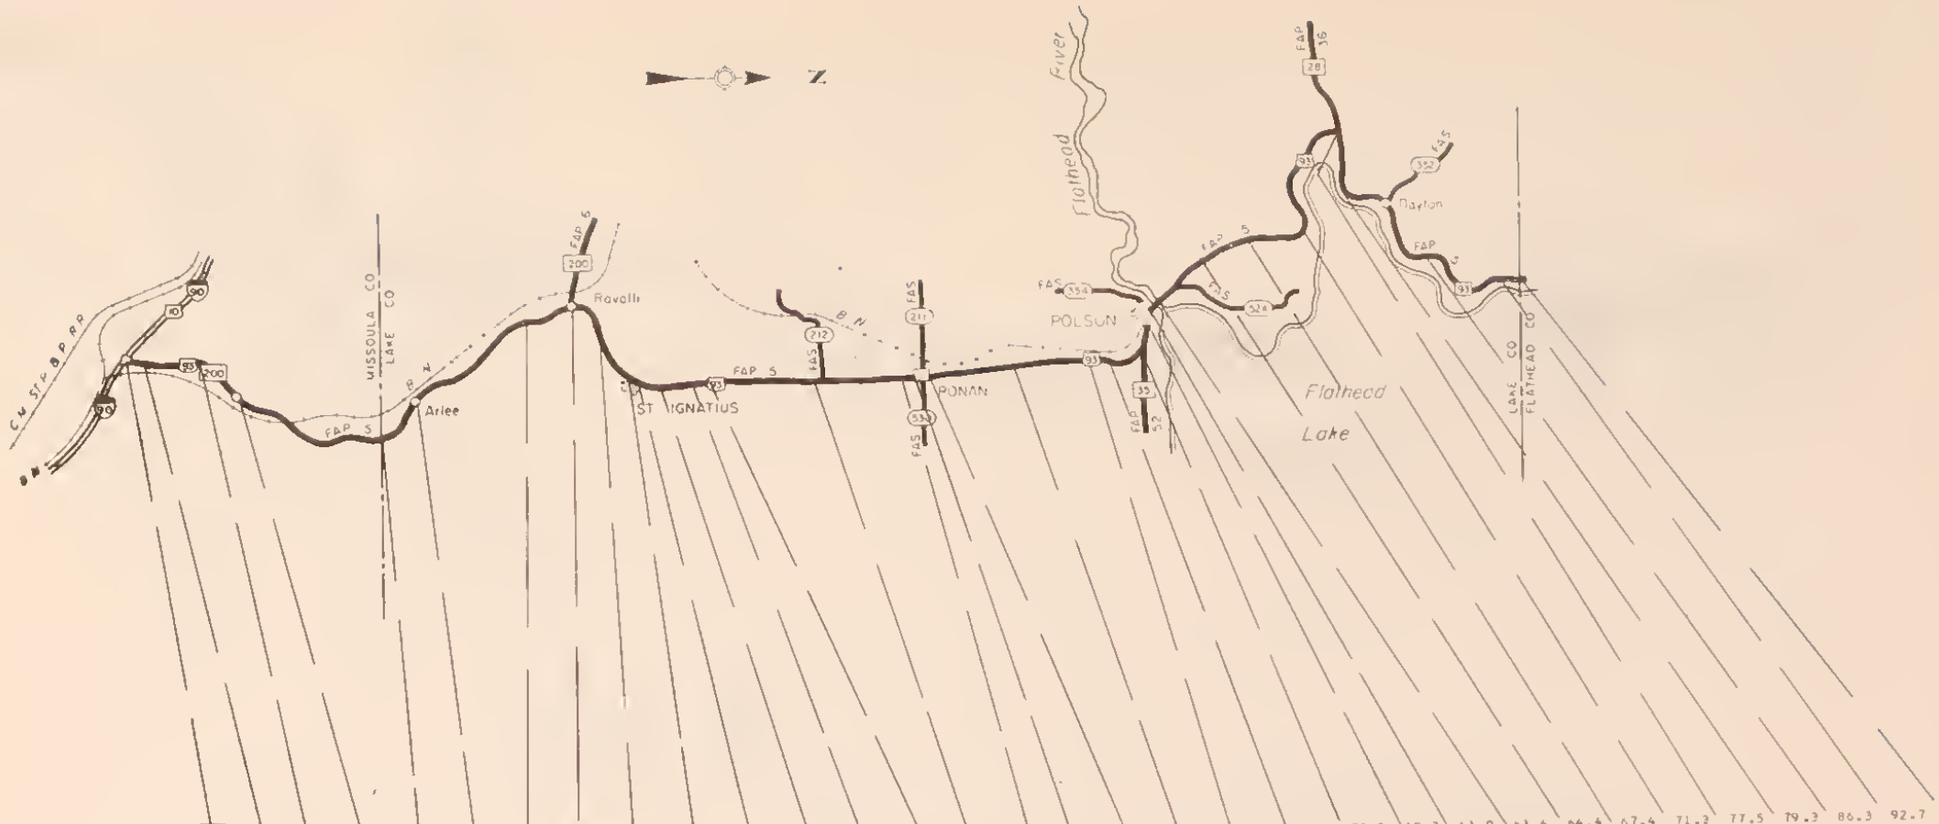

BEGINNING MILE POST	0.0	0.2	4.0	5.5	15.0	18.4	24.3	27.5	30.0	32.6	32.7	33.0	34.9	35.3	41.1	46.1	46.5	47.3	53.3	56.9	57.8	59.0	59.3	61.0	61.6	64.4	67.4	71.2	77.5	79.3	86.3	92.7
LENGTH	0.2	3.4	1.5	9.4	3.4	5.8	3.1	2.5	2.5	0.1	0.3	1.8	0.3	5.7	5.0	0.4	0.7	6.0	3.4	0.8	1.1	0.3	1.6	0.5	2.8	2.9	3.8	6.2	1.8	6.9	6.4	0.7
YEAR BUILT	66	34	48	64	40	55	55	56	56	U	69	56	72	50	66	70	U	70	58	73	58	58	U	66	54	54	54	62	62	22	33	64
YEAR IMPROVED	66	55	54	64	40	60	60	60	60	R	69	60	72	50	66	70	R	70	58	73	58	58	R	66	54	54	70	62	62	52	65	64
SURFACE WIDTH	36	20	24	36	24	32	32	44	32	B	44	32	32	24	40	40	B	40	32	40	32	40	B	40	24	24	30	32	32	22	24	32
ROADWAY WIDTH	36	24	32	36	30	32	32	44	32	A	44	32	32	30	40	40	A	40	32	40	32	40	A	40	32	32	30	32	32	24	24	32
SURFACE TYPE	PMS	RMS	RMS	PMS	RMS	PMS	PMS	PMS	PMS	N	RMS	PMS	PMS	RMS	PMS	PMS	N	PMS	PMS	PMS	PMS	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	RMS	RMS	PMS
ADT	3954	3874	3768	3566	3414	3401	3410	2802	2611		3093	3352	3302	3224	3682	4151		3655	4322	4495	4584	6163		2712	1955	1718	1594	1399	1276	1319	1375	1412
DHV	577	565	550	520	498	496	497	409	381		451	489	482	470	537	606		533	631	656	669	899		366	269	231	215	188	172	178	185	190
SERVICE VOLUME	392	239	182	453	468	536	268	578	503		88	503	399	453	281	784		309	688	308	454	326		285	544	365	414	453	672	303	335	276
FOUNDATION - 10	8	0	2	4	0	6	6	5	4		5	4	7	0	6	8		10	8	8	6	9		9	0	5	7	7	7	0	0	7
SURFACE - 30	23	13	14	15	12	19	18	18	17		21	13	23	15	21	25		28	23	25	18	25		26	12	17	26	22	21	7	10	23
DRAINAGE - 10	10	7	7	10	8	10	10	10	10		10	10	10	8	10	10		10	10	10	10	10		10	10	10	9	10	10	4	6	10
SAFETY - 20	2	1	10	10	6	9	4	3	10		20	7	4	4	14	20		13	10	20	12	20		1	3	7	6	7	9	1	1	20
CAPACITY - 30	8	0	0	13	14	16	2	19	19		0	15	12	14	1	18		4	16	0	8	0		11	23	21	22	24	26	21	22	20
SUFFICIENCY RATING	51	21	33	52	40	60	40	55	60		56	49	56	41	52	81		65	67	63	54	64		57	48	60	70	70	73	33	37	80
ADJUSTED RATING	40	14	24	42	30	50	30	47	52		47	39	46	32	42	74		55	57	52	42	51		49	42	55	66	67	71	30	34	78
DEFICIENT MILEAGE	.11	2.74	1.02	4.55	2.06	2.34	1.88	1.14	1.02		.14	.93	.17	3.42	2.40	.07		2.10	1.13	.32	.54	.11		.25	1.48	1.17	1.15	1.66	.49	4.64	4.04	.14

FAP ROUTE 5
SHEET 1 OF 2

BEGINNING MILE POST	93.5	98.6	104.2	109.6	114.8	120.6	125.4	126.9	128.4	134.6	145.6	156.9	159.6	168.2	178.0	179.6	180.9	BEGINNING MILE POST
LENGTH	5.1	5.5	5.3	4.9	5.8	4.7	1.4	1.5	6.2	10.9	11.2	2.6	8.6	9.6	1.5	1.3	6.5	LENGTH
YEAR BUILT	64	63	49	U	57	60	60	U	34	55	55	55	31	33	U	43	50	YEAR BUILT
YEAR IMPROVED	64	63	61	R	60	60	60	R	54	59	60	60	64	51	R	57	50	YEAR IMPROVED
SURFACE WIDTH	32	32	38	B	36	36	36	B	22	24	26	26	24	22	B	22	24	SURFACE WIDTH
ROADWAY WIDTH	32	32	38	A	36	36	36	A	23	28	26	26	24	22	A	24	24	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	N	PMS	PMS	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	N	PMS	PMS	SURFACE TYPE
ADT	1926	2511	5540		3549	3681	6276		1270	976	675	629	820	1279		1869	381	ADT
DHV	260	338	664		425	441	753		165	126	87	81	106	166		242	45	DHV
SERVICE VOLUME	243	298	383		309	662	937		202	569	319	319	431	396		357	353	SERVICE VOLUME
FOUNDATION - 10	4	6	7		6	4	6		0	3	3	4	0	0		0	0	FOUNDATION - 10
SURFACE - 30	18	22	22		24	15	20		10	17	18	17	13	8		11	15	SURFACE - 30
DRAINAGE - 10	10	10	10		10	10	10		4	10	9	9	4	5		8	9	DRAINAGE - 10
SAFETY - 20	9	3	13		11	12	15		1	8	9	5	1	1		1	3	SAFETY - 20
CAPACITY - 30	14	13	4		9	20	18		18	27	26	26	26	24		20	28	CAPACITY - 30
SUFFICIENCY RATING	55	54	56		60	65	69		33	65	65	61	44	38		40	55	SUFFICIENCY RATING
ADJUSTED RATING	49	46	43		50	55	57		31	64	67	63	44	35		35	61	ADJUSTED RATING
DEFICIENT MILEAGE	2.33	2.55	2.35		2.32	1.67	.46		4.15	3.83	3.94	1.05	4.86	5.98		.82	2.94	DEFICIENT MILEAGE

FAP ROUTE 5
SHEET 2 OF 2

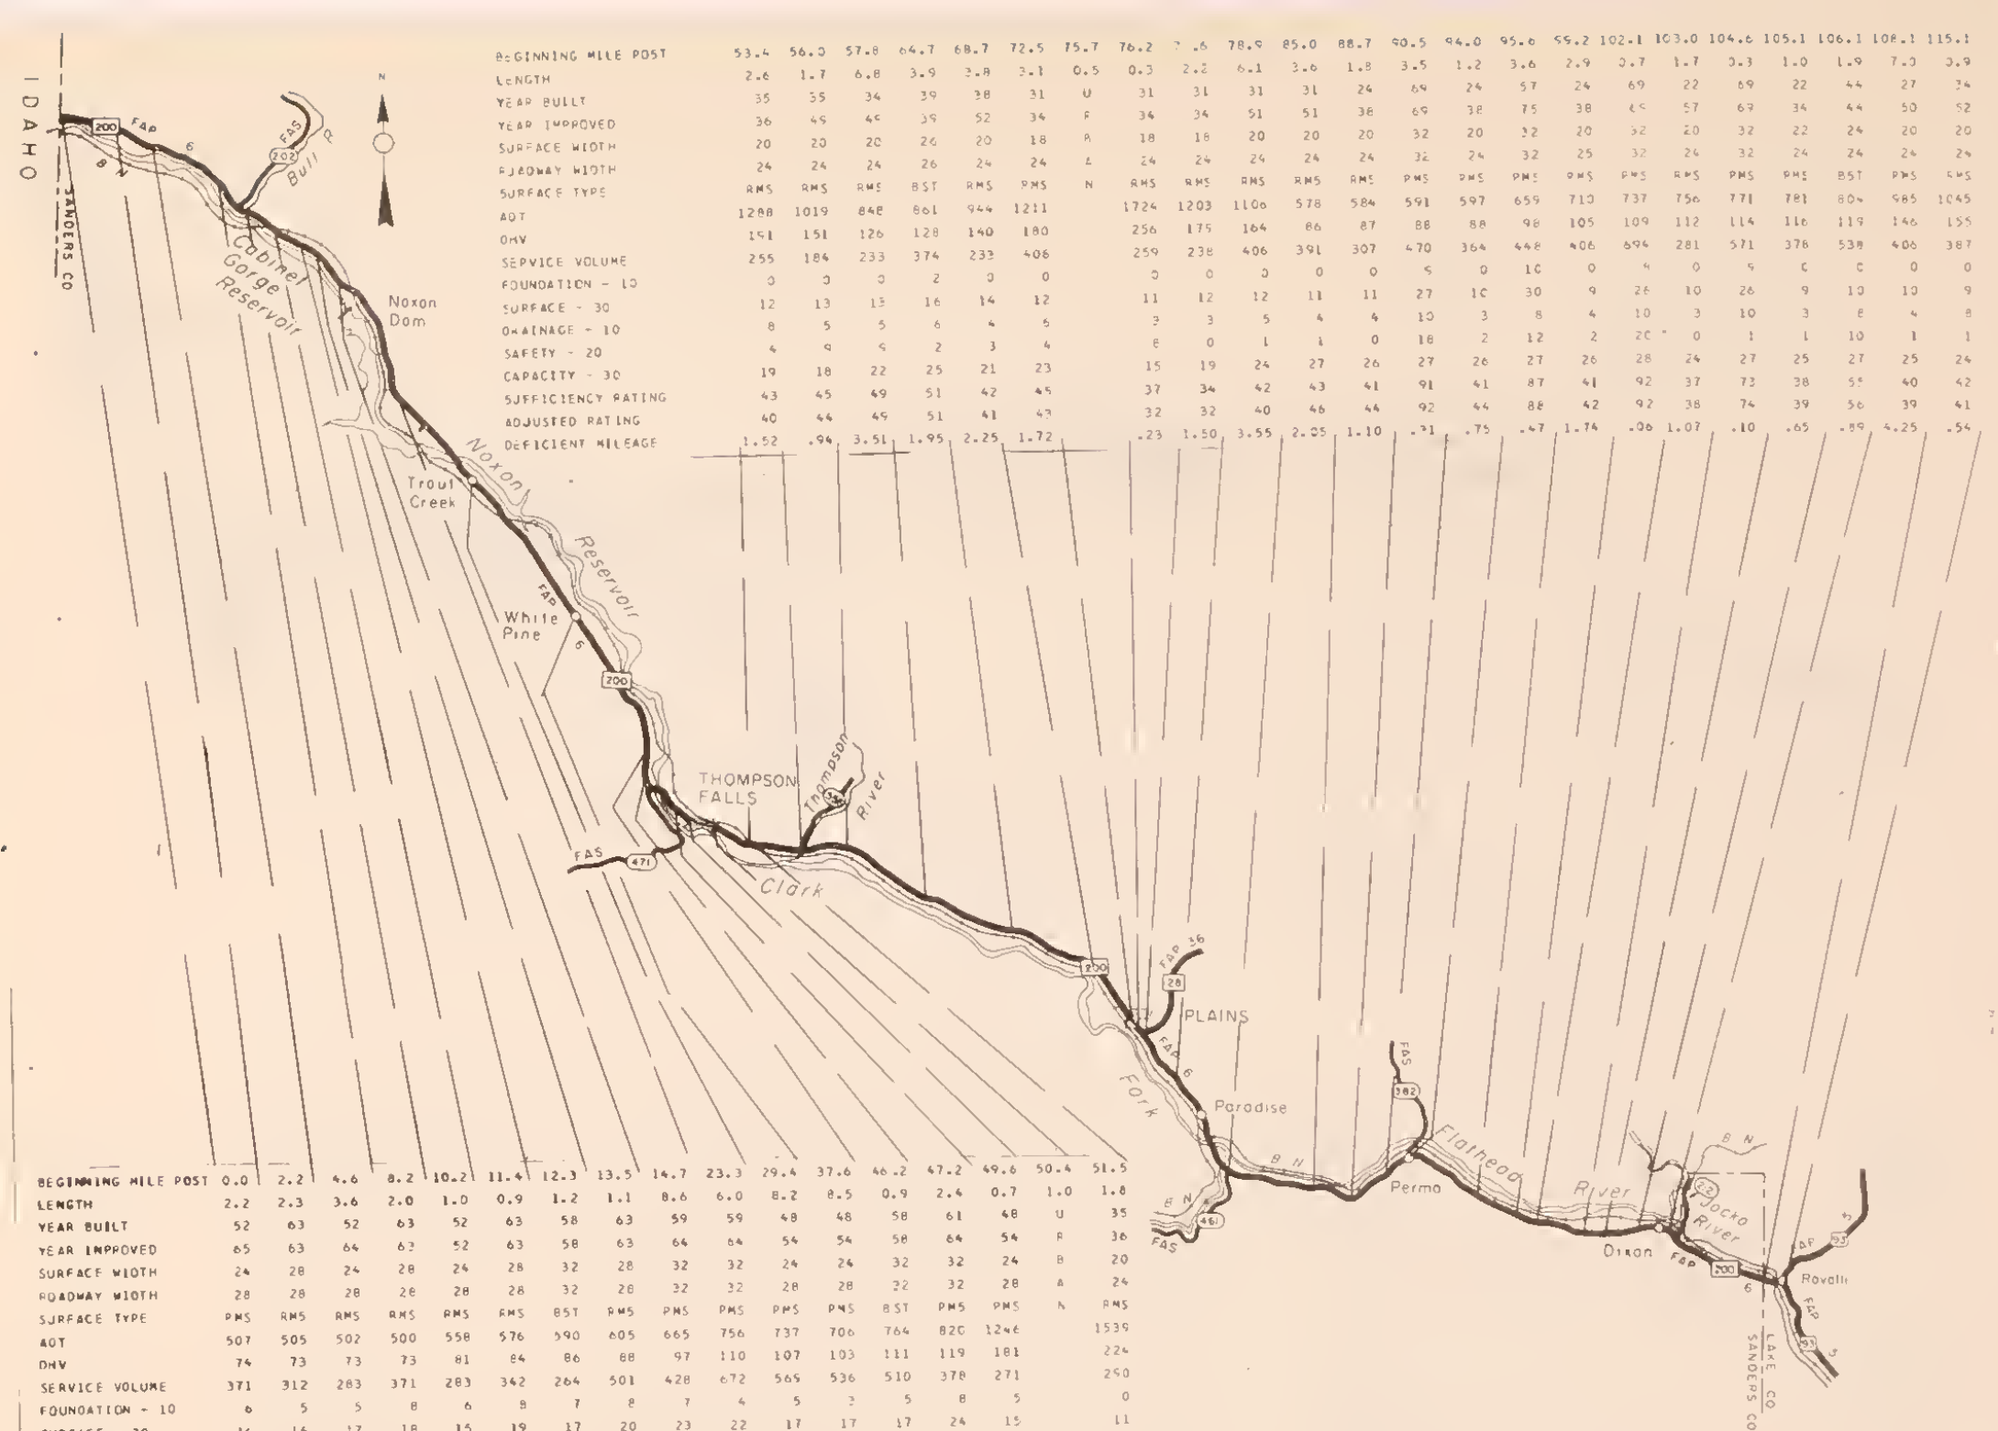

BEGINNING MILE POST	53.4	56.0	57.8	64.7	68.7	72.5	75.7	76.2	7 .6	78.9	85.0	88.7	90.5	94.0	95.6	99.2	102.1	103.0	104.6	105.1	106.1	108.1	115.1
LENGTH	2.6	1.7	6.8	3.9	3.8	3.1	0.5	0.3	2.2	6.1	3.6	1.8	3.5	1.2	3.6	2.9	0.7	1.7	0.3	1.0	1.9	7.0	3.9
YEAR BUILT	35	35	34	39	38	31	U	31	31	31	31	24	69	24	57	24	69	22	69	22	44	27	34
YEAR IMPROVED	36	49	49	39	52	34	P	34	34	51	51	38	69	38	75	38	69	57	69	34	44	50	52
SURFACE WIDTH	20	20	20	26	20	18	P	18	18	20	20	20	32	20	32	20	32	20	32	22	24	20	20
ROADWAY WIDTH	24	24	24	26	24	24	A	24	24	24	24	24	32	24	32	25	32	24	32	24	24	24	24
SURFACE TYPE	RMS	RMS	RMS	BST	RMS	RMS	N	RMS	RMS	RMS	RMS	RMS	PMS	PMS	PMS	PMS	PMS	RMS	PMS	PMS	BST	PMS	PMS
ADT	1288	1019	848	861	944	1211		1724	1203	1106	578	584	591	597	659	710	737	756	771	781	804	985	1045
DHV	151	151	126	128	140	180		256	175	164	86	87	88	88	98	105	109	112	114	116	119	146	155
SERVICE VOLUME	255	184	233	374	233	406		259	238	406	391	307	470	364	448	406	694	281	571	378	538	406	387
FOUNDATION - 10	0	0	0	2	0	0		0	0	0	0	0	5	0	10	0	4	0	5	0	0	0	0
SURFACE - 30	12	13	13	16	14	12		11	12	12	11	11	27	10	30	9	26	10	26	9	10	10	9
DRAINAGE - 10	8	5	5	6	4	6		3	3	5	4	4	10	3	8	4	10	3	10	3	8	4	8
SAFETY - 20	4	9	5	2	3	4		8	0	1	1	0	18	2	12	2	20	0	1	1	10	1	1
CAPACITY - 30	19	18	22	25	21	23		15	19	24	27	26	27	26	27	26	28	24	27	25	27	25	24
SUFFICIENCY RATING	43	45	49	51	42	45		37	34	42	43	41	91	41	87	41	92	37	73	38	55	40	42
ADJUSTED RATING	40	44	49	51	41	43		32	32	40	46	44	92	44	88	42	92	38	74	39	56	39	41
DEFICIENT MILEAGE	1.52	.94	3.51	1.95	2.25	1.72		.23	1.50	3.55	2.05	1.10	.31	.75	.47	1.74	.06	1.07	.10	.65	.89	4.25	.54

BEGINNING MILE POST	0.0	2.2	4.6	8.2	10.2	11.4	12.3	13.5	14.7	23.3	29.4	37.6	46.2	47.2	49.6	50.4	51.5
LENGTH	2.2	2.3	3.6	2.0	1.0	0.9	1.2	1.1	8.6	6.0	8.2	8.5	0.9	2.4	0.7	1.0	1.8
YEAR BUILT	52	63	52	63	52	63	58	63	59	59	48	48	58	61	48	U	35
YEAR IMPROVED	65	63	64	63	52	63	58	63	64	64	54	54	58	64	54	P	36
SURFACE WIDTH	24	28	24	28	24	28	32	28	32	32	24	24	32	32	24	B	20
ROADWAY WIDTH	28	28	28	28	28	28	32	28	32	32	28	28	32	32	28	A	24
SURFACE TYPE	PMS	RMS	RMS	RMS	RMS	RMS	BST	RMS	PMS	PMS	PMS	PMS	BST	PMS	PMS	N	RMS
ADT	507	505	502	500	558	576	590	605	665	756	737	706	764	820	1246		1539
DHV	74	73	73	73	81	84	86	88	97	110	107	103	111	119	181		224
SERVICE VOLUME	371	312	283	371	283	342	264	501	428	672	565	536	510	378	271		250
FOUNDATION - 10	6	5	5	8	6	8	7	8	7	4	5	3	5	8	5		0
SURFACE - 30	16	14	17	18	15	19	17	20	23	22	17	17	17	24	15		11
DRAINAGE - 10	8	9	9	10	10	10	10	10	10	10	9	9	10	10	5		6
SAFETY - 20	3	4	4	8	4	5	6	20	6	8	6	6	20	3	5		3
CAPACITY - 30	27	26	26	27	26	26	25	27	27	28	27	27	27	25	20		18
SUFFICIENCY RATING	60	58	61	71	61	68	65	85	75	72	64	62	79	70	54		36
ADJUSTED RATING	64	62	65	74	64	71	68	86	76	73	65	63	80	70	51		34
DEFICIENT MILEAGE	.90	.99	1.41	.58	.42	.30	.42	.17	2.15	1.70	2.56	3.24	.20	.74	.32		1.16

FAP ROUTE NO 6
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.1	7.5	13.5	16.7	20.4	23.5	26.4	30.4	31.2	43.0	44.5	46.6	48.0	49.7	51.9	59.0	66.7	73.5	74.2	74.8	76.8	82.7	83.2	90.1	BEGINNING MILE POST
LENGTH	0.1	7.4	6.0	3.3	3.5	3.0	2.9	4.0	0.8	11.7	1.5	2.0	1.3	1.7	2.2	7.0	7.7	6.7	0.6	0.5	2.0	6.0	0.4	6.8	4.4	LENGTH
YEAR BUILT	40	40	40	36	37	37	36	36	U	34	49	34	U	40	53	53	56	56	74	74	74	74	68	68	U	YEAR BUILT
YEAR IMPROVED	40	40	40	39	39	39	36	59	R	35	49	59	P	40	53	53	61	61	75	75	75	75	68	68	F	YEAR IMPROVED
SURFACE WIDTH	22	22	24	24	24	24	22	22	B	18	30	22	B	24	24	24	32	32	44	64	38	38	44	68	B	SURFACE WIDTH
ROADWAY WIDTH	22	22	24	24	24	24	25	26	A	24	30	24	A	30	32	32	32	32	44	64	38	38	44	68	A	ROADWAY WIDTH
SURFACE TYPE	BST	BST	BST	BST	BST	BST	PMS	PMS	N	PMS	BST	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	N	SURFACE TYPE
ADT	671	695	751	846	862	885	934	1647		2043	2225	3506		4267	3194	2613	2527	3355	3894	3947	3737	4178	4891	5569		ADT
DHV	87	90	97	109	112	115	121	214		265	289	455		554	415	339	328	436	506	513	485	543	635	723		DHV
SERVICE VOLUME	329	329	289	235	225	220	273	452		414	345	627		780	648	648	720	720	320	2160	344	344	206	1968		SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	0	0	0	0		0	4	0		0	0	3	10	10	10	10	10	10	10	10		FOUNDATION - 10
SURFACE - 30	13	13	12	12	13	12	11	10		10	14	8		10	11	13	25	25	30	30	30	30	30	28		SURFACE - 30
DRAINAGE - 10	5	5	6	7	7	7	6	6		6	9	4		4	10	10	10	10	10	10	10	10	10	10		DRAINAGE - 10
SAFETY - 20	0	1	10	2	3	7	2	2		2	1	3		5	11	7	11	14	20	12	14	10	10	9		SAFETY - 20
CAPACITY - 30	26	26	25	23	23	22	23	23		20	17	19		15	20	22	23	21	6	26	9	6	0	24		CAPACITY - 30
SUFFICIENCY RATING	44	45	53	44	46	48	42	41		38	45	34		38	52	55	79	80	76	88	73	66	60	81		SUFFICIENCY RATING
ADJUSTED RATING	46	47	54	44	46	48	42	37		32	38	25		27	43	47	74	74	68	83	65	56	48	72		ADJUSTED RATING
DEFICIENT MILEAGE	.35	4.08	2.82	1.89	1.91	1.60	1.70	2.36		7.28	.82	1.35		1.97	1.07	3.17	1.62	1.35	.16	.06	.55	2.05	.19	1.31		DEFICIENT MILEAGE

FAP ROUTE NO
SHEET 1 OF 1

BEGINNING MILE POST	87.7	98.9	107.6	107.8	108.2	108.8
LENGTH	11.2	8.7	0.1	0.3	0.6	0.3
YEAR BUILT	50	52	68	68	52	68
YEAR IMPROVED	51	52	68	68	52	68
SURFACE WIDTH	24	24	40	40	24	44
ROADWAY WIDTH	26	28	40	40	28	44
SURFACE TYPE	RMS	RMS	RMS	PMS	RMS	RMS
ADT	1181	1488	1720	893	893	893
DHV	153	193	223	116	116	116
SERVICE VOLUME	500	377	296	118	558	118
FOUNDATION - 10	4	3	10	10	4	10
SURFACE - 30	16	17	28	28	17	28
DRAINAGE - 10	10	10	10	10	10	10
SAFETY - 20	14	20	20	1	13	1
CAPACITY - 30	25	22	19	15	27	15
SUFFICIENCY RATING	69	72	87	64	71	64
ADJUSTED RATING	67	69	85	64	71	64
DEFICIENT MILEAGE	3.49	2.44	.02	.11	.18	.11

BEGINNING MILE POST	0.0	3.9	11.2	23.2	25.5	27.3	27.6	30.0	34.2	39.6	46.4	48.5	49.8	52.8	54.4	55.9	57.1	65.4	76.9	78.1	BEGINNING MILE POST
LENGTH	3.9	7.3	11.9	2.3	1.6	0.3	2.2	4.1	5.3	7.0	2.0	1.2	2.9	1.6	1.5	1.1	8.3	11.5	1.1	9.6	LENGTH
YEAR BUILT	31	57	33	73	73	U	U	31	33	U	36	U	36	69	69	69	72	56	U	39	YEAR BUILT
YEAR IMPROVED	53	64	58	73	73	N	N	35	54	R	36	R	36	69	69	69	72	65	9	39	YEAR IMPROVED
SURFACE WIDTH	24	32	22	56	56	0 C	0 C	24	22	B	24	B	24	40	40	40	34	32	B	24	SURFACE WIDTH
ROADWAY WIDTH	24	32	24	56	56	E O	E O	30	30	A	30	A	30	40	40	40	34	32	A	32	ROADWAY WIDTH
SURFACE TYPE	RMS	PMS	RMS	PMS	PMS	R N	R N	PMS	RMS	N	PMS	N	PMS	PMS	PMS	PMS	PMS	PMS	N	RMS	SURFACE TYPE
ADT	1158	1353	1401	1535	1552	S	S	1463	1729		7265		2715	2562	2421	2013	1938	1878		1527	ADT
DHV	150	175	182	199	201	T	T	190	224		871		415	391	370	261	251	244		198	DHV
SERVICE VOLUME	249	504	573	1920	1920	A	A	364	367		524		500	344	283	320	504	696		625	SERVICE VOLUME
FOUNDATION - 10	0	8	0	9	9	U	U	0	0		0		3	9	10	9	8	8		0	FOUNDATION - 10
SURFACE - 30	13	25	9	28	28	C	C	13	13		12		17	26	27	27	24	24		12	SURFACE - 30
DRAINAGE - 10	6	10	8	10	10	T	T	5	8		3		7	10	10	10	10	10		10	DRAINAGE - 10
SAFETY - 20	1	6	3	2	11	1	1	2	2		3		4	20	20	20	17	7		20	SAFETY - 20
CAPACITY - 30	21	25	25	28	28	0	0	22	21		5		18	13	10	18	23	25		25	CAPACITY - 30
SUFFICIENCY RATING	41	74	45	77	86	N	N	42	44		23		49	78	77	84	82	74		67	SUFFICIENCY RATING
ADJUSTED RATING	39	71	42	74	84			38	39		12		41	72	72	81	78	70		63	ADJUSTED RATING
DEFICIENT MILEAGE	2.30	1.91	6.56	.54	.23			2.42	2.99		1.61		1.51	.36	.34	.18	1.49	3.00		3.19	DEFICIENT MILEAGE

FAP ROUTE 8
SHEET 1 OF 1

BEGINNING MILE POST	0.0	1.9	12.4	20.1	20.8	29.3	38.5	39.8	43.1	46.0	53.8	60.0	64.0	BEGINNING MILE POST
LENGTH	2.2	10.4	7.7	0.7	8.4	9.0	1.3	3.2	2.8	7.8	6.1	4.0	0.7	LENGTH
YEAR BUILT	67	59	63	63	32	32	35	35	35	35	36	36	U	YEAR BUILT
YEAR IMPROVED	67	59	63	63	36	36	36	36	35	35	36	36	R	YEAR IMPROVED
SURFACE WIDTH	30	32	32	32	20	20	22	22	20	20	22	22	B	SURFACE WIDTH
ROADWAY WIDTH	30	32	32	32	24	24	24	24	24	24	25	25	A	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	BST	BST	RMS	RMS	RMS	RMS	RMS	RMS	N	SURFACE TYPE
ADT	315	292	261	282	304	322	807	468	450	384	435	521		ADT
DHV	50	46	41	45	48	51	129	74	72	61	69	83		DHV
SERVICE VOLUME	697	682	511	611	535	240	812	360	270	325	286	518		SERVICE VOLUME
FOUNDATION - 10	9	7	5	8	9	0	0	0	0	0	0	0		FOUNDATION - 10
SURFACE - 30	27	23	21	23	8	12	13	14	14	15	14	15		SURFACE - 30
DRAINAGE - 10	10	10	10	10	7	7	7	8	8	8	8	8		DRAINAGE - 10
SAFETY - 20	3	17	8	20	2	1	1	2	1	1	1	20		SAFETY - 20
CAPACITY - 30	29	29	29	28	29	27	28	27	26	27	26	28		CAPACITY - 30
SUFFICIENCY RATING	78	86	73	89	46	47	45	51	49	51	49	71		SUFFICIENCY RATING
ADJUSTED RATING	83	90	80	92	54	54	50	56	54	57	54	74		ADJUSTED RATING
DEFICIENT MILEAGE	.48	1.46	2.29	.07	4.57	4.81	.68	1.59	1.45	3.84	3.12	1.16		DEFICIENT MILEAGE

FAP ROUTE NO 9
SHEET 1 OF 1

BEGINNING MILE POST	0.0	3.5	7.1	9.6	16.2	20.0	29.7	39.5	51.5	52.3	55.1	BEGINNING MILE POST
LENGTH	3.1	3.6	2.4	6.4	3.8	9.7	9.8	12.0	0.6	2.7	8.7	LENGTH
YEAR BUILT	U	40	40	51	51	63	64	74	36	34	34	YEAR BUILT
YEAR IMPROVED	R	71	71	57	57	63	64	74	36	63	55	YEAR IMPROVED
SURFACE WIDTH	8	28	28	30	30	32	32	32	24	22	22	SURFACE WIDTH
ROADWAY WIDTH	A	28	28	30	30	32	32	32	24	24	24	ROADWAY WIDTH
SURFACE TYPE	N	PMS	PMS	PMS	PMS	PMS	PMS	PMS	RMS	RMS	RMS	SURFACE TYPE
ADT		2037	1769	1738	1683	1655	1631	1048	1131	1161	1043	ADT
DHV		264	229	225	218	215	212	136	147	150	135	DHV
SERVICE VOLUME		562	666	414	565	640	720	621	335	380	435	SERVICE VOLUME
FOUNDATION - 10		6	8	4	4	6	7	10	0	0	0	FOUNDATION - 10
SURFACE - 30		27	28	16	16	21	23	28	12	9	12	SURFACE - 30
DRAINAGE - 10		9	9	10	10	10	10	10	8	8	8	DRAINAGE - 10
SAFETY - 20		2	12	19	15	14	18	7	0	2	3	SAFETY - 20
CAPACITY - 30		25	25	22	24	25	26	27	23	24	25	CAPACITY - 30
SUFFICIENCY RATING		67	82	71	69	76	84	82	43	43	48	SUFFICIENCY RATING
ADJUSTED RATING		62	79	67	65	72	81	81	41	41	47	ADJUSTED RATING
DEFICIENT MILEAGE		1.19	.44	1.88	1.18	2.33	1.57	2.16	.38	1.57	4.55	DEFICIENT MILEAGE

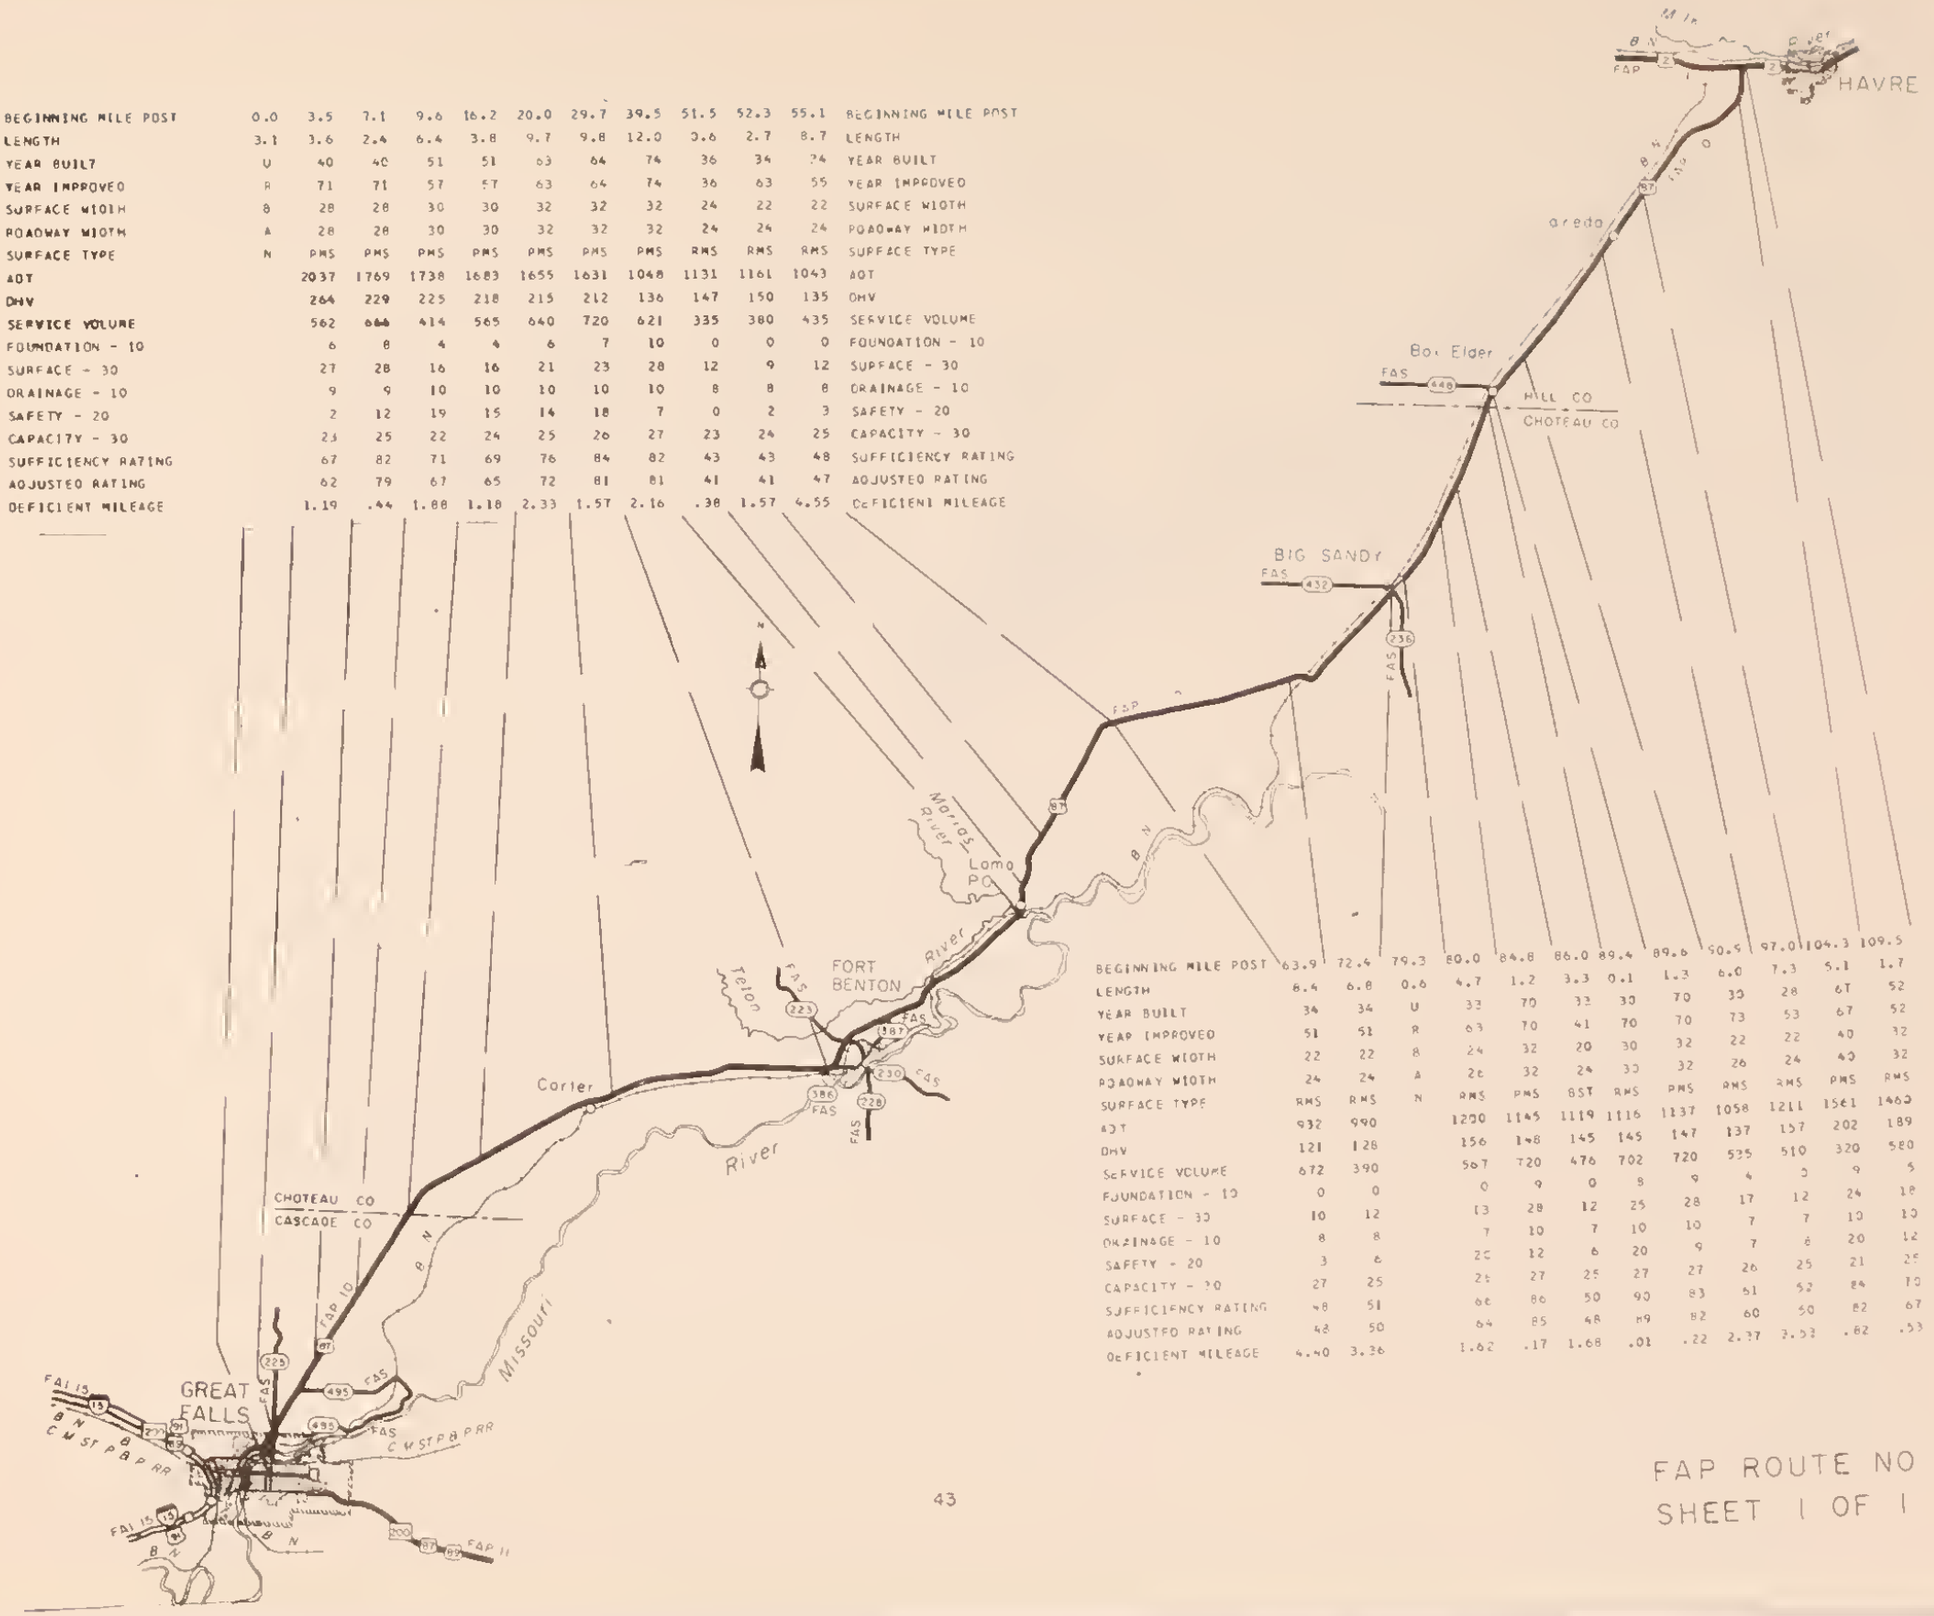

BEGINNING MILE POST	63.9	72.4	79.3	80.0	84.8	86.0	89.4	89.6	90.5	97.0	104.3	109.5
LENGTH	8.4	6.8	0.6	4.7	1.2	3.3	0.1	1.3	6.0	7.3	5.1	1.7
YEAR BUILT	34	34	U	33	70	33	33	70	33	28	67	52
YEAR IMPROVED	51	51	R	63	70	41	70	70	73	53	67	52
SURFACE WIDTH	22	22	8	24	32	20	30	32	22	22	40	32
ROADWAY WIDTH	24	24	A	26	32	24	30	32	26	24	40	32
SURFACE TYPE	RMS	RMS	N	RMS	PMS	BST	RMS	PMS	RMS	RMS	PMS	RMS
ADT	932	990		1200	1145	1119	1116	1137	1058	1211	1561	1460
DHV	121	128		156	148	145	145	147	137	157	202	189
SERVICE VOLUME	672	390		567	720	476	702	720	535	510	320	580
FOUNDATION - 10	0	0		0	9	0	8	9	4	5	9	5
SURFACE - 30	10	12		13	28	12	25	28	17	12	24	18
DRAINAGE - 10	8	8		7	10	7	10	10	7	7	10	10
SAFETY - 20	3	6		20	12	6	20	9	7	6	20	12
CAPACITY - 30	27	25		25	27	25	27	27	26	25	21	25
SUFFICIENCY RATING	48	51		66	86	50	90	83	61	52	84	70
ADJUSTED RATING	42	50		64	85	48	89	82	60	50	82	67
DEFICIENT MILEAGE	4.40	3.36		1.62	.17	1.68	.01	.22	2.37	3.53	.62	.53

FAP ROUTE NO 10
SHEET 1 OF 1

BEGINNING MILE POST	0.0	1.0	1.3	5.5	10.8	16.6	19.3	30.9	40.7	49.9	51.8	55.8	57.9	60.4	62.2	64.5	74.9	75.3	75.4	75.3	80.4	89.6	BEGINNING MILE POST
LENGTH	1.0	0.3	4.3	5.1	5.7	2.7	11.6	9.7	9.1	1.8	4.0	2.0	2.5	1.7	2.2	10.2	0.4	0.1	0.1	5.0	8.9	8.3	LENGTH
YEAR BUILT	75	75	71	69	69	61	61	61	65	61	U	34	C	55	41	41	U	38	U	38	73	73	YEAR BUILT
YEAR IMPROVED	75	75	71	69	69	61	61	61	65	61	P	34	O	55	41	41	P	38	P	38	73	73	YEAR IMPROVED
SURFACE WIDTH	48	34	34	34	32	32	32	32	32	32	E	20	I	24	20	20	E	20	E	20	32	32	SURFACE WIDTH
ROADWAY WIDTH	48	34	34	34	32	32	32	32	32	32	A	24	N	36	24	24	A	24	A	24	32	32	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	BST	PMS	PMS	PMS	PMS	PMS	N	PMS	C	PMS	RMS	PMS	N	RMS	N	RMS	PMS	PMS	SURFACE TYPE
ADT	1323	1319	1137	877	822	794	852	1057	1183	1824		2257	I	1155	1010	815		597		567	434	238	ADT
DHV	284	283	244	188	176	170	183	227	254	392		293	O	173	151	122		89		85	65	35	DHV
SERVICE VOLUME	568	774	511	596	546	748	748	748	748	748		610	E	580	453	431		582		608	643	643	SERVICE VOLUME
FOUNDATION - 10	10	10	9	10	10	10	9	9	9	9		0	N	7	0	0		0		0	9	10	FOUNDATION - 10
SURFACE - 30	30	30	27	28	28	28	27	27	26	25		13	T	18	15	14		11		9	28	30	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	10	10	10	10	10		7		10	9	9		8		8	10	10	DRAINAGE - 10
SAFETY - 20	0	20	14	20	2	18	20	19	7	6		4		9	20	5		20		4	7	15	SAFETY - 20
CAPACITY - 30	23	25	23	25	25	27	26	25	25	22		23		26	25	26		28		28	28	29	CAPACITY - 30
SUFFICIENCY RATING	73	95	83	93	75	93	92	90	77	72		47		70	69	54		67		49	82	94	SUFFICIENCY RATING
ADJUSTED RATING	71	94	82	93	75	93	92	89	75	68		40		68	68	55		69		52	85	96	ADJUSTED RATING
DEFICIENT MILEAGE	.27	.01	.73	.36	1.44	.18	.92	.97	2.11	.52		1.10		.52	.71	4.70		.02		2.56	1.61	.50	DEFICIENT MILEAGE

FAP ROUTE NO 11
SHEET 1 OF 3

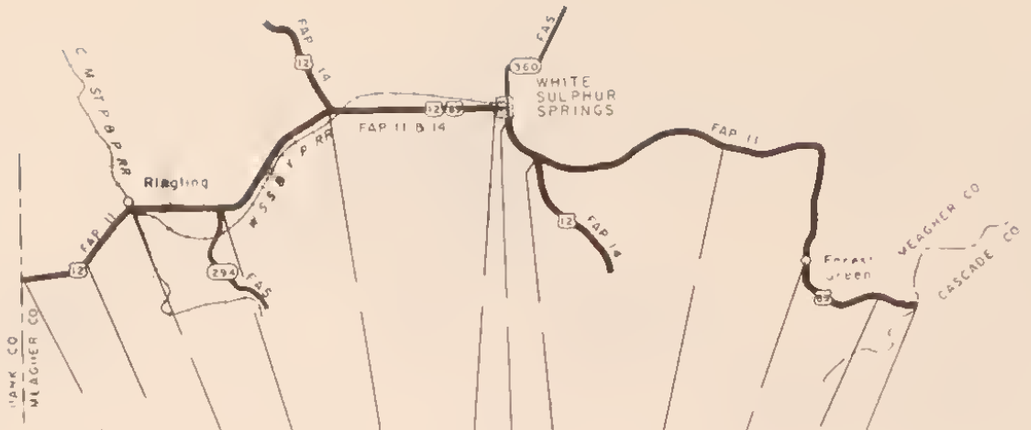

BEGINNING MILE POST	98.0	100.7	105.3	109.4	117.5	125.6	126.7	129.1	138.7	146.0	154.3	BEGINNING MILE POST
LENGTH	2.7	4.6	4.1	8.0	8.1	0.9	2.4	9.5	7.3	8.3	3.3	LENGTH
YEAR BUILT	42	31	36	36	33	U	65	55	59	59	59	YEAR BUILT
YEAR IMPROVED	52	73	47	63	36	P	65	69	63	62	63	YEAR IMPROVED
SURFACE WIDTH	24	22	24	22	20	B	40	28	26	26	40	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	24	24	A	40	28	26	26	40	ROADWAY WIDTH
SURFACE TYPE	RMS	PMS	RMS	RMS	RMS	N	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	243	254	307	342	645		810	361	350	329	305	ADT
DHV	36	38	46	51	96		121	54	52	49	45	DHV
SERVICE VOLUME	774	252	469	302	421		320	472	418	418	890	SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	0		8	5	8	7	6	FOUNDATION - 10
SURFACE - 30	10	12	13	13	12		22	26	23	23	19	SURFACE - 30
DRAINAGE - 10	8	6	8	8	8		10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	18	5	2	2	4		10	5	6	17	1	SAFETY - 20
CAPACITY - 30	29	28	29	27	27		24	28	28	28	29	CAPACITY - 30
SUFFICIENCY RATING	65	51	52	50	51		74	80	75	85	65	SUFFICIENCY RATING
ADJUSTED RATING	73	60	60	57	53		74	84	80	88	72	ADJUSTED RATING
DEFICIENT MILEAGE	.96	2.25	2.01	4.01	4.00		.62	1.91	1.84	1.24	1.16	DEFICIENT MILEAGE

FAP ROUTE NO 11
SHEET 2 OF 3

BEGINNING MILE POST	157.7	164.8	167.9	178.4	182.6	189.3	191.1	200.0	204.5	211.4	217.3	218.3	220.3
LENGTH	7.2	3.1	10.5	4.2	6.6	1.9	9.1	3.6	6.9	5.8	0.9	2.0	5.3
YEAR BUILT	59	U	52	52	40	69	69	55	52	42	39	39	U
YEAR IMPROVED	63	P	52	52	40	69	69	55	55	52	71	71	P
SURFACE WIDTH	26	B	22	22	26	48	40	40	24	26	32	32	B
ROADWAY WIDTH	26	A	26	26	26	48	40	40	32	31	32	32	A
SURFACE TYPE	PMS	N	RMS	PMS	BST	PMS	PMS	RMS	PMS	RMS	RMS	RMS	N
ADT	347		491	575	497	416	451	1747	2384	2641	3593	4074	
DHV	52		73	86	74	62	67	227	309	343	467	529	
SERVICE VOLUME	260		492	441	571	520	568	380	380	340	268	324	
FOUNDATION - 10	7		5	7	3	10	10	3	6	3	4	5	
SURFACE - 30	19		16	19	15	28	28	17	17	16	19	18	
DRAINAGE - 10	10		8	8	9	10	10	10	10	10	10	10	
SAFETY - 20	1		2	9	6	1	10	7	14	3	2	13	
CAPACITY - 30	27		28	27	28	28	28	21	18	15	4	6	
SUFFICIENCY RATING	64		59	70	61	71	86	58	65	47	39	52	
ADJUSTED RATING	70		63	73	65	81	88	53	58	39	29	41	
DEFICIENT MILEAGE	2.59		4.31	1.27	2.60	.44	1.28	1.51	2.43	3.12	.60	.56	

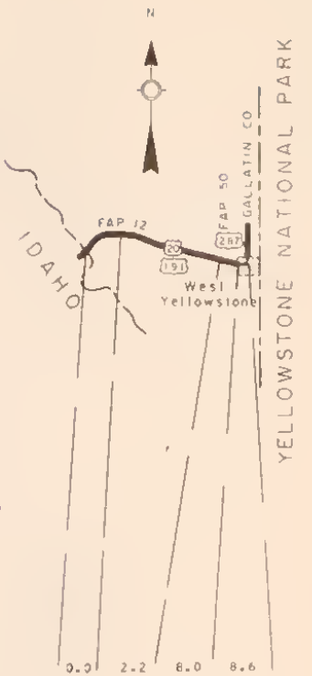

BEGINNING MILE POST	0.0	2.2	8.0	8.6
LENGTH	2.2	5.7	0.5	0.6
YEAR BUILT	61	61	30	U
YEAR IMPROVED	61	61	30	P
SURFACE WIDTH	34	34	24	B
ROADWAY WIDTH	34	34	24	A
SURFACE TYPE	PMS	PMS	RMS	N
ADT	1234	1395	1857	
DHV	285	322	428	
SERVICE VOLUME	354	680	739	
FOUNDATION - 10	5	6	0	
SURFACE - 30	17	19	10	
DRAINAGE - 10	10	10	3	
SAFETY - 20	6	12	6	
CAPACITY - 30	18	23	21	
SUFFICIENCY RATING	56	70	40	
ADJUSTED RATING	54	67	35	
DEFICIENT MILEAGE	.99	1.73	.34	

FAP ROUTE NO 11 & 12
SHEET 3 OF 3

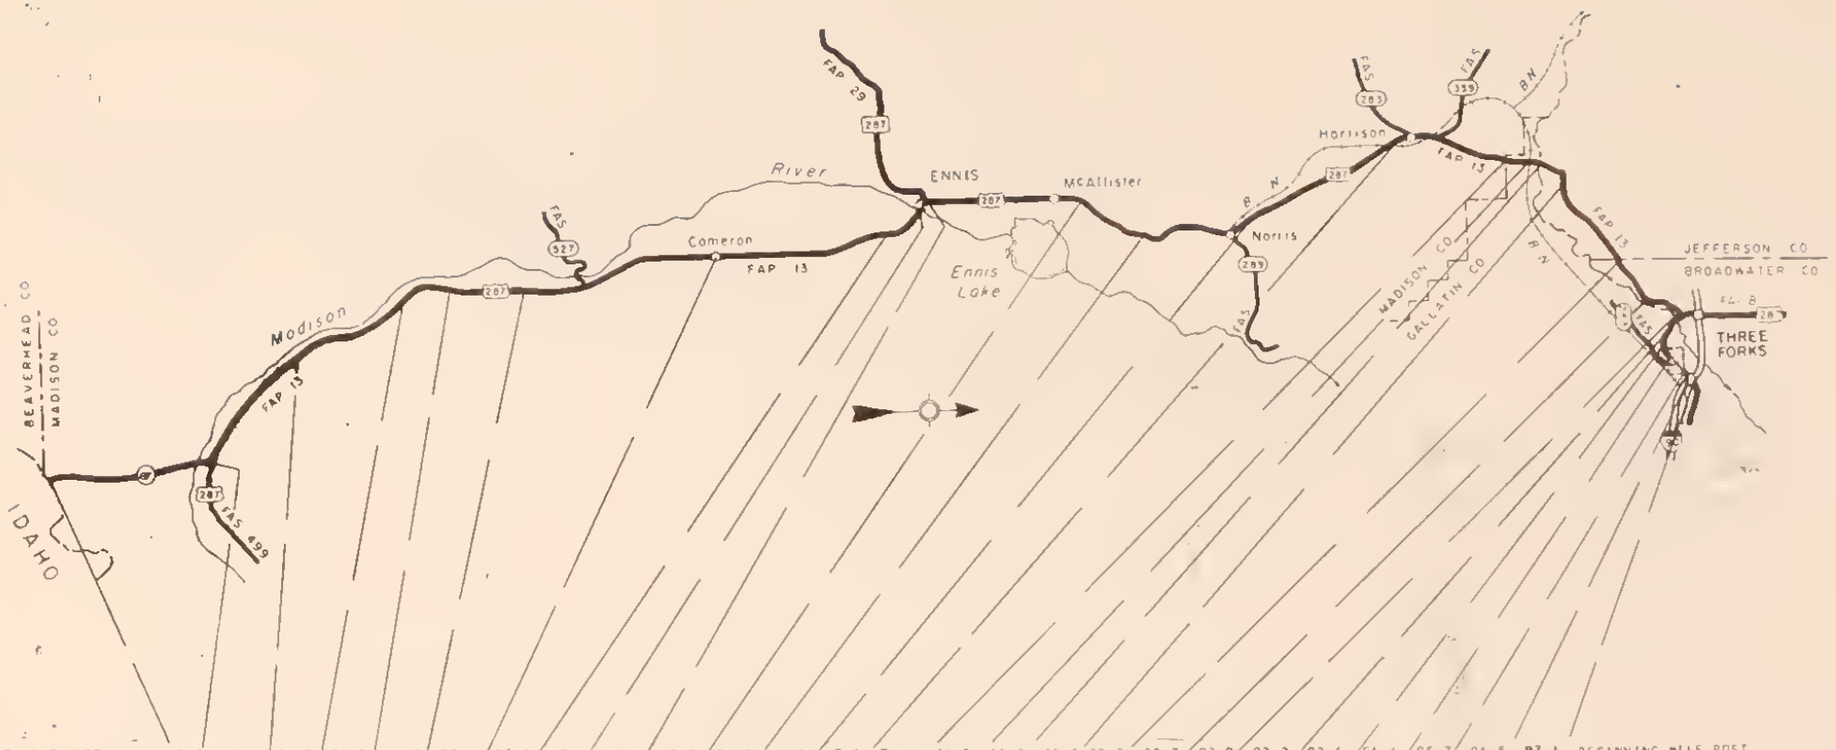

BEGINNING MILE POST	0.0	8.6	16.3	21.3	24.3	27.1	37.8	47.1	48.6	49.2	56.5	61.5	67.5	74.8	80.7	82.2	83.0	83.9	88.7	93.0	93.3	93.6	94.6	95.7	96.5	97.1	BEGINNING MILE POST
LENGTH	8.5	7.8	4.9	2.9	2.6	10.8	9.2	1.4	0.6	7.2	5.1	5.9	7.3	5.9	1.4	0.8	0.9	5.2	4.2	0.2	0.3	1.1	1.1	0.8	0.5	0.2	LENGTH
YEAR BUILT	U		66	69	71	34	34	34	36	U	34	36	34	34	U	U		49	34	32	32	68	68	49	38	U	50	64	YEAR BUILT
YEAR IMPROVED	N		66	69	71	34	34	34	58	R	34	57	34	34	N	N		52	52	48	61	68	68	49	38	R	55	69	YEAR IMPROVED
SURFACE WIDTH	0 C		40	40	40	20	20	20	22	B	20	22	20	20	0 C	0 C		27	22	24	20	40	40	28	24	B	32	32	SURFACE WIDTH
ROADWAY WIDTH	E O		40	40	40	24	24	24	25	A	24	24	24	24	E O	E O		27	24	30	24	40	40	28	28	A	32	32	ROADWAY WIDTH
SURFACE TYPE	R N		PMS	PMS	PMS	RMS	RMS	RMS	RMS	N	RMS	RMS	RMS	RMS	R N	P N		RMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	N	RMS	PMS	SURFACE TYPE
ADT	S		336	440	435	431	484	623	1165		835	689	502	397	S	S		253	340	277	328	358	583	628	719		1449	1446	ADT
DHV	T		67	88	87	86	96	124	233		129	106	77	61	T	T		39	52	42	42	46	75	81	93		188	187	DHV
SERVICE VOLUME	R		697	664	597	871	838	486	601		400	258	205	201	R	R		277	342	323	396	96	75	629	399		808	457	SERVICE VOLUME
FOUNDATION - 10	U		9	10	10	0	0	0	0		0	0	3	0	U	U		0	3	0	0	9	8	3	0		2	9	FOUNDATION - 10
SURFACE - 30	C		27	26	26	10	10	12	12		15	12	15	13	C	C		13	17	14	10	26	25	16	13		12	28	SURFACE - 30
DRAINAGE - 10	T		10	10	10	7	9	8	9		8	7	8	7	T	T		8	8	8	7	10	10	10	8		8	10	DRAINAGE - 10
SAFETY - 20	L		12	20	15	13	9	5	10		4	1	1	1	I	I		1	1	1	2	20	1	20	2		20	20	SAFETY - 20
CAPACITY - 30	O		29	28	28	29	28	26	24		25	24	24	25	O	O		28	28	28	28	23	15	28	27		27	24	CAPACITY - 30
SUFFICIENCY RATING	N		87	94	91	59	56	51	55		52	44	51	46	N	N		50	57	51	47	88	59	77	50		69	91	SUFFICIENCY RATING
ADJUSTED RATING			90	95	92	64	60	54	53		52	46	55	52				59	64	59	54	90	62	79	51		66	89	ADJUSTED RATING
DEFICIENT MILEAGE			1.01	.29	.26	1.08	4.75	4.52	.67		3.47	2.90	2.89	3.96				.41	.35	2.58	2.25	.03	.12	.25	.55		.17	.01	DEFICIENT MILEAGE

FAP ROUTE NO 13
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.8	2.3	6.4	13.5	23.5	33.4	45.1	48.9	55.9	63.1	68.5	73.3	75.1	BEGINNING MILE POST
LENGTH	0.8	1.5	3.9	7.1	9.9	9.9	11.5	3.9	6.9	7.2	5.3	4.8	1.7	2.0	LENGTH
YEAR BUILT	U	64	64	37	51	55	C	65	U	56	37	36	36	34	YEAR BUILT
YEAR IMPROVED	R	64	64	52	51	55	O	65	N	58	48	52	52	64	YEAR IMPROVED
SURFACE WIDTH	B	32	32	20	20	24	I	40	D C	28	20	22	22	22	SURFACE WIDTH
ROADWAY WIDTH	A	32	32	25	26	27	N	40	E C	28	25	24	24	24	ROADWAY WIDTH
SURFACE TYPE	N	PMS	PMS	RMS	PMS	PMS	C	PMS	R N	PMS	RMS	PMS	RMS	RMS	SURFACE TYPE
ADT		1200	459	382	385	377	I	399	S	362	362	381	393	428	ADT
DHV		180	68	57	57	56	O	51	T	47	47	49	51	55	DHV
SERVICE VOLUME		569	487	387	134	308	E	255	R	415	250	280	544	748	SERVICE VOLUME
FOUNDATION - 10		9	8	0	2	4	N	7	U	3	0	0	0	0	FOUNDATION - 10
SURFACE - 30		25	23	12	16	16	T	22	C	17	12	12	12	10	SURFACE - 30
DRAINAGE - 10		10	10	7	5	9		10	T	10	8	7	7	6	DRAINAGE - 10
SAFETY - 20		10	5	2	1	1		20	I	10	2	1	18	2	SAFETY - 20
CAPACITY - 30		25	28	28	24	27		27	O	28	28	27	25	25	CAPACITY - 30
SUFFICIENCY RATING		79	74	49	48	57		86	N	68	50	47	66	47	SUFFICIENCY RATING
ADJUSTED RATING		77	78	55	54	63		89		74	56	53	71	52	ADJUSTED RATING
DEFICIENT MILEAGE		.31	1.03	3.66	5.14	4.29		.55		2.32	2.66	2.58	.60	1.06	DEFICIENT MILEAGE

FAP ROUTE NO 14
SHEET 1 OF 3

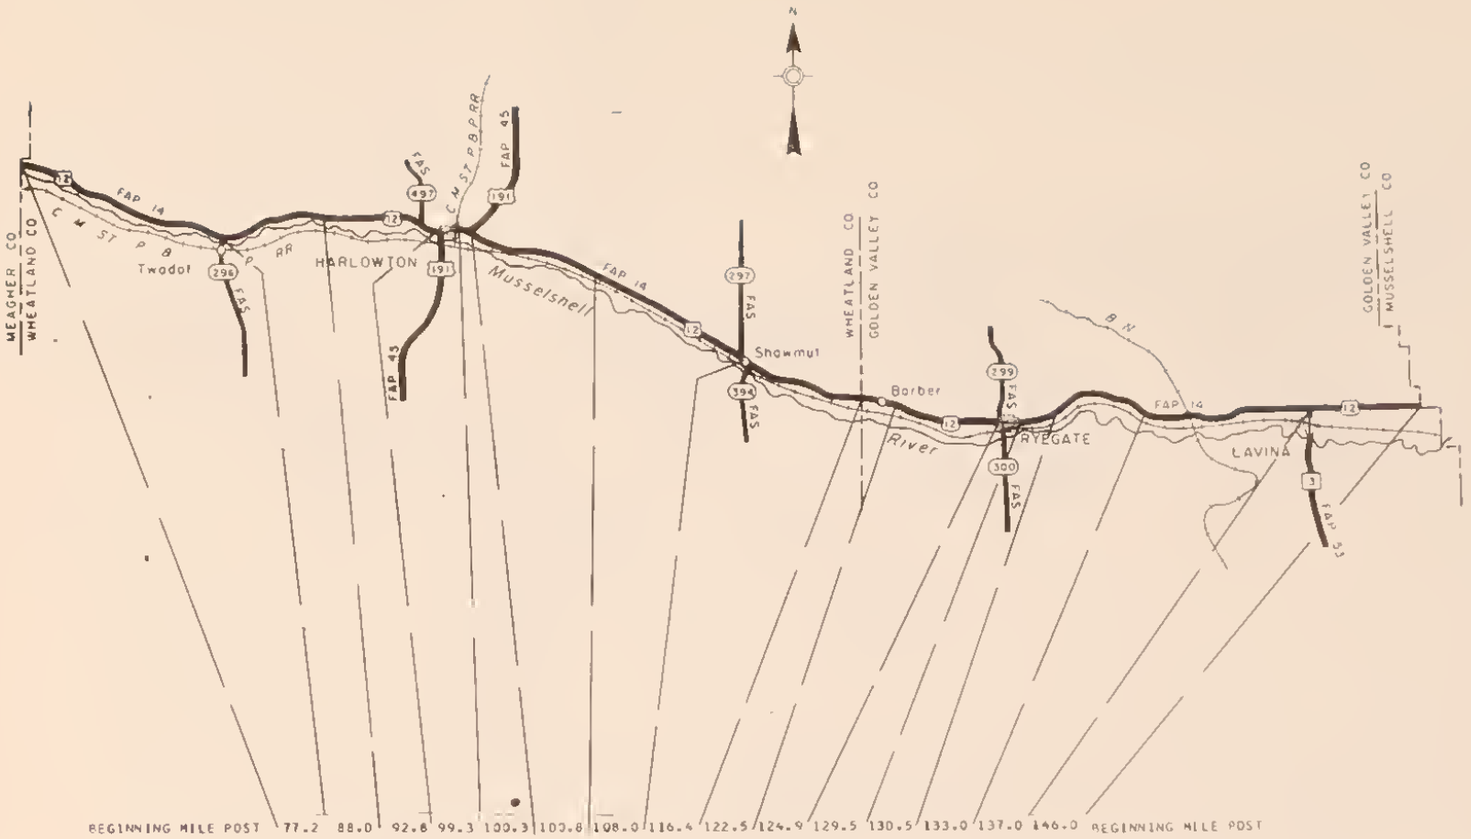

BEGINNING MILE POST	77.2	88.0	92.8	99.3	100.3	100.8	108.0	116.4	122.5	124.9	129.5	130.5	133.0	137.0	146.0	BEGINNING MILE POST
LENGTH	10.8	4.7	6.5	0.9	0.5	7.1	8.4	6.1	2.3	4.5	1.0	2.4	3.9	9.1	5.6	LENGTH
YEAR BUILT	34	66	68	U	65	65	53	67	67	56	U	37	37	37	37	YEAR BUILT
YEAR IMPROVED	34	66	68	R	65	65	53	67	67	71	R	53	55	55	37	YEAR IMPROVED
SURFACE WIDTH	20	40	40	B	40	40	24	40	40	28	B	21	21	21	20	SURFACE WIDTH
ROADWAY WIDTH	24	40	40	A	40	40	28	40	40	28	A	24	24	24	26	ROADWAY WIDTH
SURFACE TYPE	BST	PMS	PMS	N	PMS	PMS	RMS	PMS	PMS	PMS	N	RMS	RMS	RMS	RMS	SURFACE TYPE
ADT	424	498	631		1560	1025	918	797	835	948		1097	968	874	250	ADT
DHV	55	63	82		202	133	119	103	108	123		142	125	113	32	DHV
SERVICE VOLUME	642	344	344		937	281	558	281	296	558		333	147	312	343	SERVICE VOLUME
FOUNDATION - 10	0	8	8		9	8	4	8	8	3		0	0	0	0	FOUNDATION - 10
SURFACE - 30	5	23	24		25	25	16	24	25	16		13	13	11	9	SURFACE - 30
DRAINAGE - 10	7	10	10		10	10	10	10	10	10		6	6	8	4	DRAINAGE - 10
SAFETY - 20	1	12	12		10	14	8	11	20	6		20	1	3	1	SAFETY - 20
CAPACITY - 30	25	27	26		27	23	27	25	25	27		24	17	25	29	CAPACITY - 30
SUFFICIENCY RATING	46	80	80		81	80	65	78	88	62		63	37	47	43	SUFFICIENCY RATING
ADJUSTED RATING	51	83	81		78	79	65	78	88	61		61	36	47	52	ADJUSTED RATING
DEFICIENT MILEAGE	5.84	.95	1.30		.09	1.42	2.54	1.34	.28	1.72		.91	2.50	4.82	3.20	DEFICIENT MILEAGE

FAP ROUTE NO 14
SHEET 2 OF 3

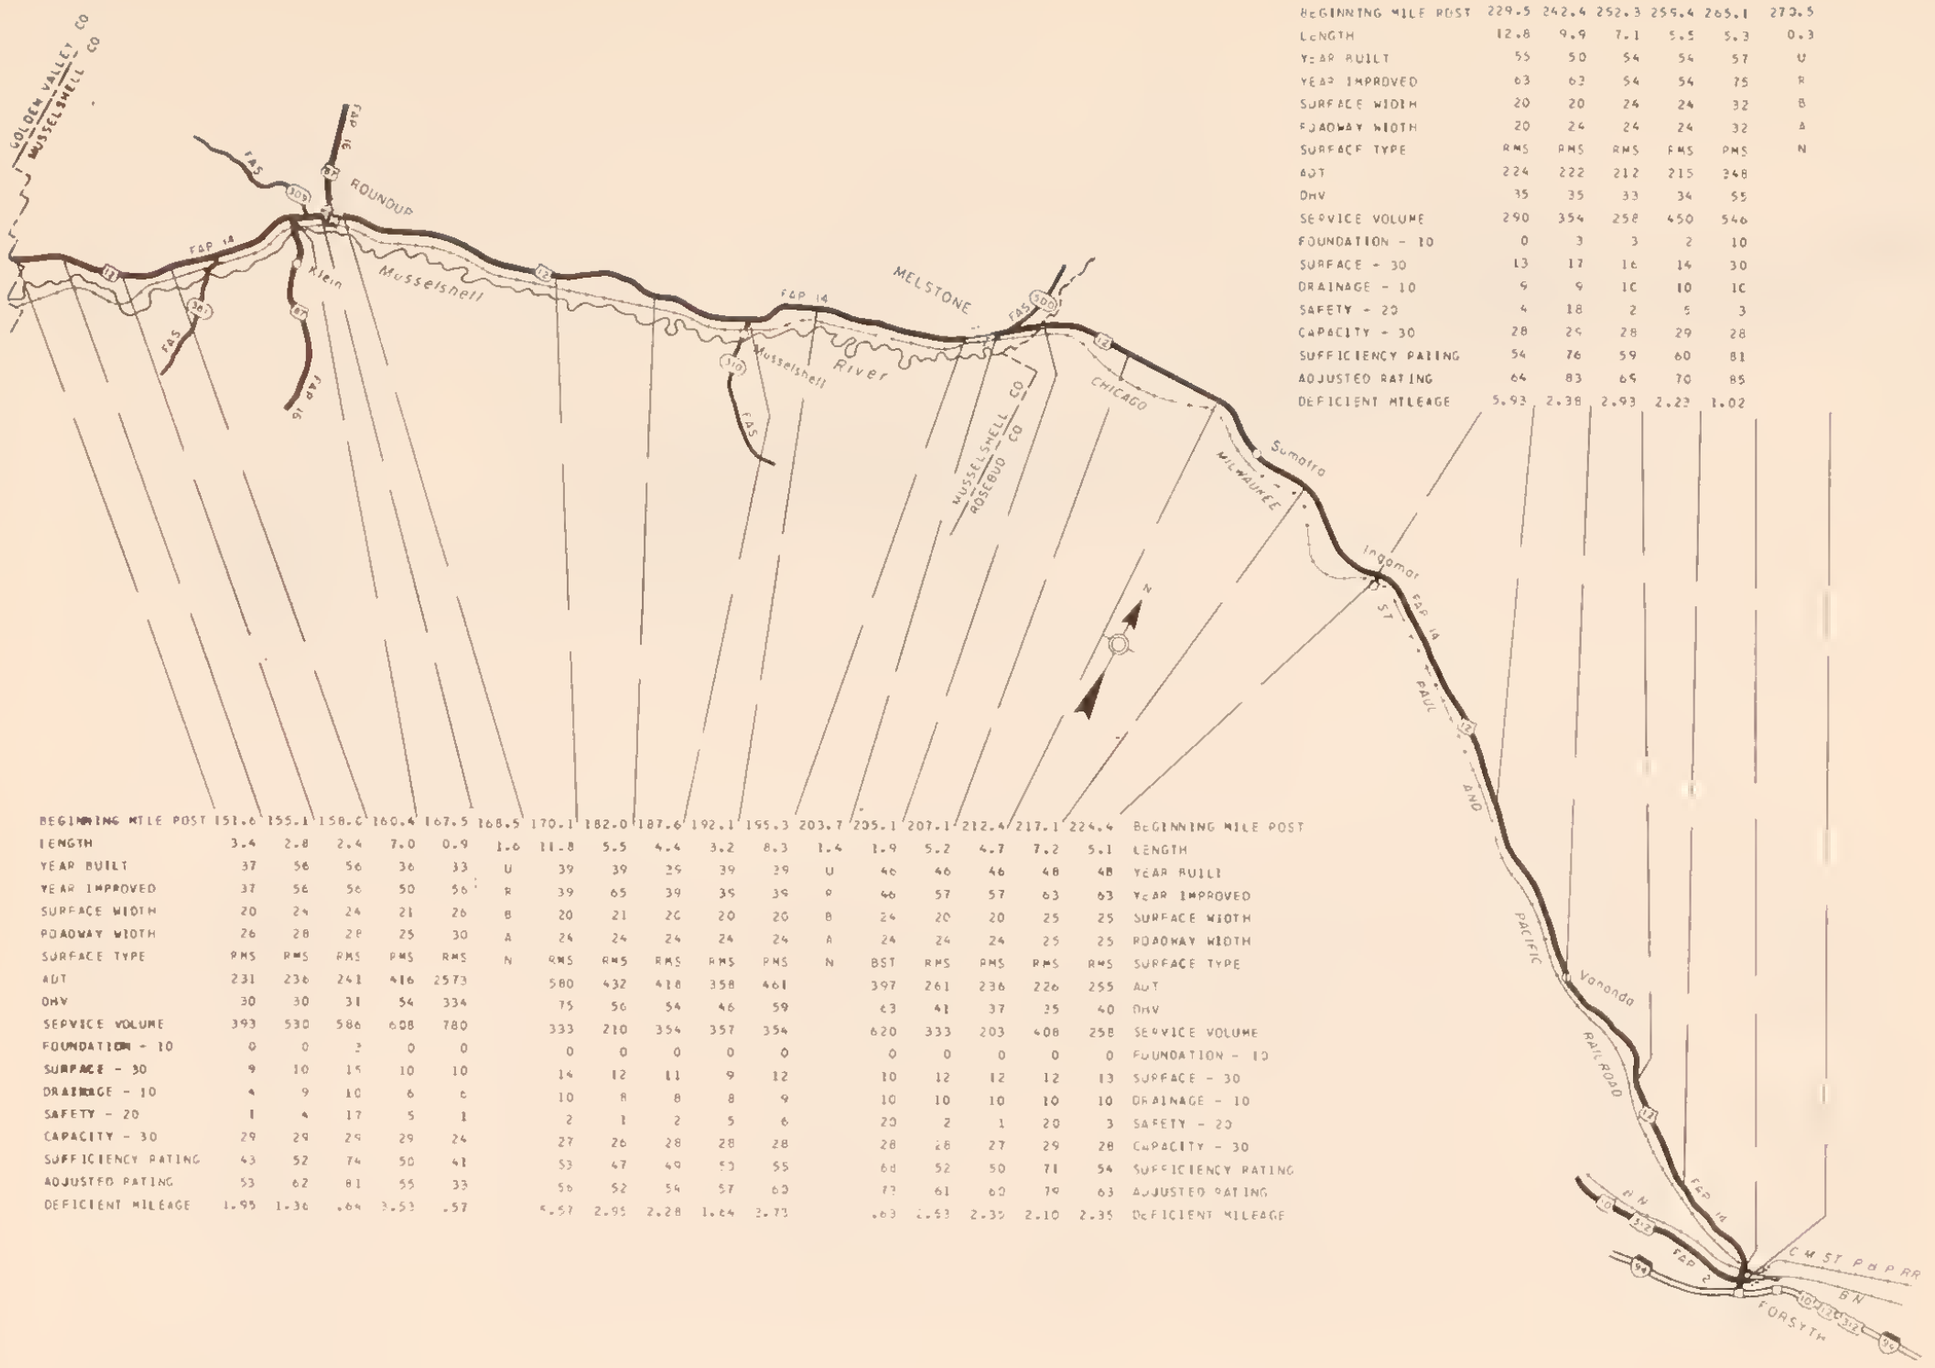

BEGINNING MILE POST	151.6	155.1	158.0	160.4	167.5	168.5	170.1	182.0	187.6	192.1	195.3	203.7	205.1	207.1	212.4	217.1	224.4	BEGINNING MILE POST
LENGTH	3.4	2.8	2.4	7.0	0.9	1.6	11.8	5.5	4.4	3.2	8.3	1.4	1.9	5.2	4.7	7.2	5.1	LENGTH
YEAR BUILT	37	56	56	36	33	U	39	39	39	39	39	U	46	46	46	48	48	YEAR BUILT
YEAR IMPROVED	37	56	56	50	56	R	39	65	39	39	39	R	46	57	57	63	63	YEAR IMPROVED
SURFACE WIDTH	20	24	24	21	26	B	20	21	20	20	20	B	24	20	20	25	25	SURFACE WIDTH
ROADWAY WIDTH	26	28	28	25	30	A	24	24	24	24	24	A	24	24	24	25	25	ROADWAY WIDTH
SURFACE TYPE	RMS	RMS	RMS	RMS	RMS	N	RMS	RMS	RMS	RMS	RMS	N	BST	RMS	RMS	RMS	RMS	SURFACE TYPE
ADT	231	236	241	416	2573		580	432	418	358	461		397	261	236	226	255	ADT
DHV	30	30	31	54	334		75	56	54	46	59		63	41	37	35	40	DHV
SERVICE VOLUME	393	530	586	608	780		333	210	354	357	354		620	333	203	408	258	SERVICE VOLUME
FOUNDATION - 10	0	0	3	0	0		0	0	0	0	0		0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	9	10	15	10	10		14	12	11	9	12		10	12	12	12	13	SURFACE - 30
DRAINAGE - 10	4	9	10	6	6		10	8	8	8	9		10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	1	4	17	5	1		2	1	2	5	6		20	2	1	20	3	SAFETY - 20
CAPACITY - 30	29	29	29	29	24		27	26	28	28	28		28	28	27	29	28	CAPACITY - 30
SUFFICIENCY RATING	43	52	74	50	41		53	47	49	53	55		68	52	50	71	54	SUFFICIENCY RATING
ADJUSTED RATING	53	62	81	55	33		56	52	54	57	60		73	61	60	79	63	ADJUSTED RATING
DEFICIENT MILEAGE	1.95	1.36	.64	3.53	.57		5.57	2.95	2.28	1.64	3.73		.63	2.63	2.35	2.10	2.35	DEFICIENT MILEAGE

BEGINNING MILE POST	229.5	242.4	252.3	255.4	265.1	270.5
LENGTH	12.8	9.9	7.1	5.5	5.3	0.3
YEAR BUILT	55	50	54	54	57	U
YEAR IMPROVED	63	63	54	54	75	R
SURFACE WIDTH	20	20	24	24	32	B
ROADWAY WIDTH	20	24	24	24	32	A
SURFACE TYPE	RMS	RMS	RMS	RMS	PMS	N
ADT	224	222	212	215	348	
DHV	35	35	33	34	55	
SERVICE VOLUME	290	354	258	450	546	
FOUNDATION - 10	0	3	3	2	10	
SURFACE - 30	13	17	16	14	30	
DRAINAGE - 10	9	9	10	10	10	
SAFETY - 20	4	18	2	5	3	
CAPACITY - 30	28	29	28	29	28	
SUFFICIENCY RATING	54	76	59	60	81	
ADJUSTED RATING	64	83	69	70	85	
DEFICIENT MILEAGE	5.93	2.38	2.93	2.23	1.02	

FAP ROUTE NO 14
SHEET 3 OF 3

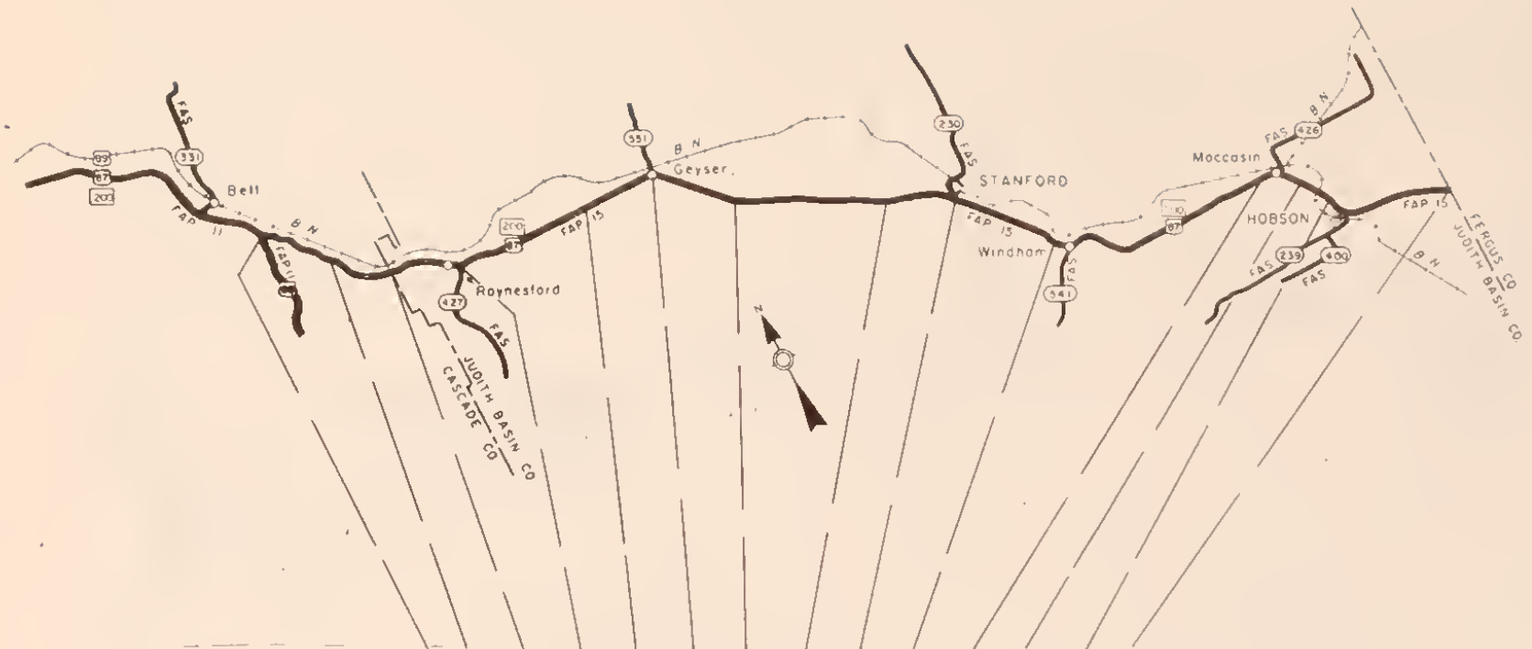

BEGINNING MILE POST	0.0	5.3	7.0	10.4	17.9	21.8	26.5	33.2	36.6	41.8	54.3	56.6	57.8	BEGINNING MILE POST
LENGTH	5.4	1.7	3.3	7.5	3.9	4.6	6.6	3.4	5.1	12.4	2.3	1.1	6.5	LENGTH
YEAR BUILT	60	61	61	64	64	36	36	37	37	36	58	55	71	YEAR BUILT
YEAR IMPROVED	60	61	61	64	64	50	50	37	37	36	71	55	71	YEAR IMPROVED
SURFACE WIDTH	32	32	32	32	32	22	22	24	24	20	22	24	32	SURFACE WIDTH
ROADWAY WIDTH	32	32	32	32	32	25	25	30	30	24	24	32	32	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	PMS	SURFACE TYPE
ADT	1427	1341	1322	1258	1258	1234	1240	1315	1503	1294	1350	1310	1392	ADT
DHV	169	159	157	149	149	148	147	156	178	153	160	155	165	DHV
SERVICE VOLUME	380	448	448	352	592	431	243	522	286	364	302	503	666	SERVICE VOLUME
FOUNDATION - 10	4	5	6	7	7	0	0	0	0	0	2	4	9	FOUNDATION - 10
SURFACE - 30	18	23	22	19	23	12	11	11	11	13	15	14	27	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	7	6	9	9	6	7	10	10	DRAINAGE - 10
SAFETY - 20	15	12	10	8	11	12	2	3	8	5	1	5	10	SAFETY - 20
CAPACITY - 30	23	25	25	24	26	25	21	26	21	24	22	25	26	CAPACITY - 30
SUFFICIENCY RATING	70	75	73	68	77	56	40	49	49	48	47	58	82	SUFFICIENCY RATING
ADJUSTED RATING	67	73	71	66	75	54	38	46	45	45	44	55	80	ADJUSTED RATING
DEFICIENT MILEAGE	1.62	.44	.90	2.40	.91	2.06	3.96	1.75	2.63	6.46	1.23	.47	1.17	DEFICIENT MILEAGE

FAP ROUTE NO 15
SHEET 1 OF 4

364.4	366.1	BEGINNING MILE POST
1.7	1.2	LENGTH
45	U	YEAR BUILT
61	R	YEAR IMPROVED
24	B	SURFACE WIDTH
28	A	ROADWAY WIDTH
RMS	N	SURFACE TYPE
818		ADT
97		DHV
469		SERVICE VOLUME
3		FOUNDATION - 10
15		SURFACE - 30
8		DRAINAGE - 10
4		SAFETY - 20
27		CAPACITY - 30
57		SUFFICIENCY RATING
57		ADJUSTED RATING
.75		DEFICIENT MILEAGE

BEGINNING MILE POST	64.4	64.9	66.9	73.5	76.9	79.2	80.8	83.1	88.2	94.3	103.2	112.9	121.7	123.1	131.0	135.5	136.5	137.6	148.6	156.7	BEGINNING MILE POST
LENGTH	0.5	2.0	6.5	3.3	2.3	1.7	2.1	5.0	6.0	8.9	9.6	8.7	1.4	7.7	4.5	0.8	1.1	11.0	7.9	1.6	LENGTH
YEAR BUILT	71	71	47	47	47	47	U	42	31	43	40	51	29	31	31	U	31	54	51	73	YEAR BUILT
YEAR IMPROVED	71	71	54	54	56	54	R	72	56	52	54	51	58	58	58	R	69	54	51	73	YEAR IMPROVED
SURFACE WIDTH	32	32	24	24	24	24	B	24	24	24	24	24	18	20	20	B	22	24	24	30	SURFACE WIDTH
ROADWAY WIDTH	32	32	31	31	31	31	A	30	30	30	32	24	24	24	24	A	24	24	24	30	ROADWAY WIDTH
SURFACE TYPE	RMS	RMS	RMS	RMS	RMS	RMS	N	RMS	RMS	RMS	RMS	BST	RMS	RMS	RMS	N	RMS	RMS	BST	RMS	SURFACE TYPE
ADT	1438	1436	1511	1568	1830	1483		1148	1009	841	758	347	309	268	263		379	366	350	310	ADT
DHV	171	170	179	186	217	172		149	131	109	115	53	47	41	40		57	55	53	47	DHV
SERVICE VOLUME	621	672	565	384	565	733		415	333	604	825	344	369	561	374		416	384	479	567	SERVICE VOLUME
FOUNDATION - 10	10	10	6	6	7	7		4	0	0	0	0	0	0	0		0	0	0	10	FOUNDATION - 10
SURFACE - 30	30	30	20	19	20	18		19	14	9	9	13	9	10	9		11	12	9	30	SURFACE - 30
DRAINAGE - 10	10	10	9	9	9	9		10	8	9	9	9	5	4	7		10	10	8	10	DRAINAGE - 10
SAFETY - 20	10	20	19	3	4	3		5	1	1	3	1	20	4	1		3	15	1	17	SAFETY - 20
CAPACITY - 30	26	26	25	23	24	26		25	24	27	28	28	28	29	28		28	28	28	29	CAPACITY - 30
SUFFICIENCY RATING	86	96	79	60	64	63		67	47	46	49	51	62	47	45		52	65	46	56	SUFFICIENCY RATING
ADJUSTED RATING	84	95	76	56	59	59		65	46	46	50	58	69	56	54		58	71	53	97	ADJUSTED RATING
DEFICIENT MILEAGE	.07	.08	1.37	1.32	.85	.65		1.67	3.19	4.83	4.93	4.27	.55	4.12	2.50		.53	3.85	4.31	.06	DEFICIENT MILEAGE

FAP ROUTE NO 15
SHEET 2 OF 4

BEGINNING MILE POST	156.3	161.5	171.2	180.2	192.2	199.0	206.8	212.1	212.4	213.0	218.0	226.7	238.9	241.4	242.4	BEGINNING MILE POST
LENGTH	3.1	9.5	8.1	11.8	6.8	7.6	5.3	0.2	0.6	4.9	8.6	12.2	2.5	1.0	6.0	LENGTH
YEAR BUILT	73	68	47	73	36	36	36	37	U	37	36	37	38	68	38	YEAR BUILT
YEAR IMPROVED	73	68	58	73	53	49	57	47	R	52	49	54	54	68	54	YEAR IMPROVED
SURFACE WIDTH	30	36	24	32	24	24	22	22	B	24	24	24	24	36	24	SURFACE WIDTH
ROADWAY WIDTH	30	36	24	32	24	24	26	24	A	26	25	24	24	36	24	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	RMS	PMS	PMS	RMS	N	RMS	BST	RMS	RMS	RMS	RMS	SURFACE TYPE
ADT	307	294	280	273	287	291	335	1021		401	334	326	318	315	310	ADT
DHV	46	44	42	41	43	44	51	156		61	51	49	48	48	47	DHV
SERVICE VOLUME	567	450	438	400	275	275	240	263		500	266	243	312	212	243	SERVICE VOLUME
FOUNDATION - 10	10	5	0	9	0	0	0	0		0	0	0	0	6	0	FOUNDATION - 10
SURFACE - 30	30	21	8	28	12	11	13	13		12	13	13	15	24	14	SURFACE - 30
DRAINAGE - 10	10	10	7	10	9	9	7	8		8	8	8	9	10	9	DRAINAGE - 10
SAFETY - 20	9	16	1	20	1	1	1	3		2	2	1	2	10	1	SAFETY - 20
CAPACITY - 30	29	29	29	28	28	28	27	21		28	27	27	28	27	27	CAPACITY - 30
SUFFICIENCY RATING	88	81	45	95	50	49	48	45		50	50	49	54	79	51	SUFFICIENCY RATING
ADJUSTED RATING	91	86	53	96	58	57	55	44		56	57	56	61	84	59	ADJUSTED RATING
DEFICIENT MILEAGE	.38	1.82	4.48	.59	3.44	3.90	2.77	.14		2.49	4.34	6.22	1.16	.21	2.98	DEFICIENT MILEAGE

FAP ROUTE NO 15
SHEET 3 OF 4

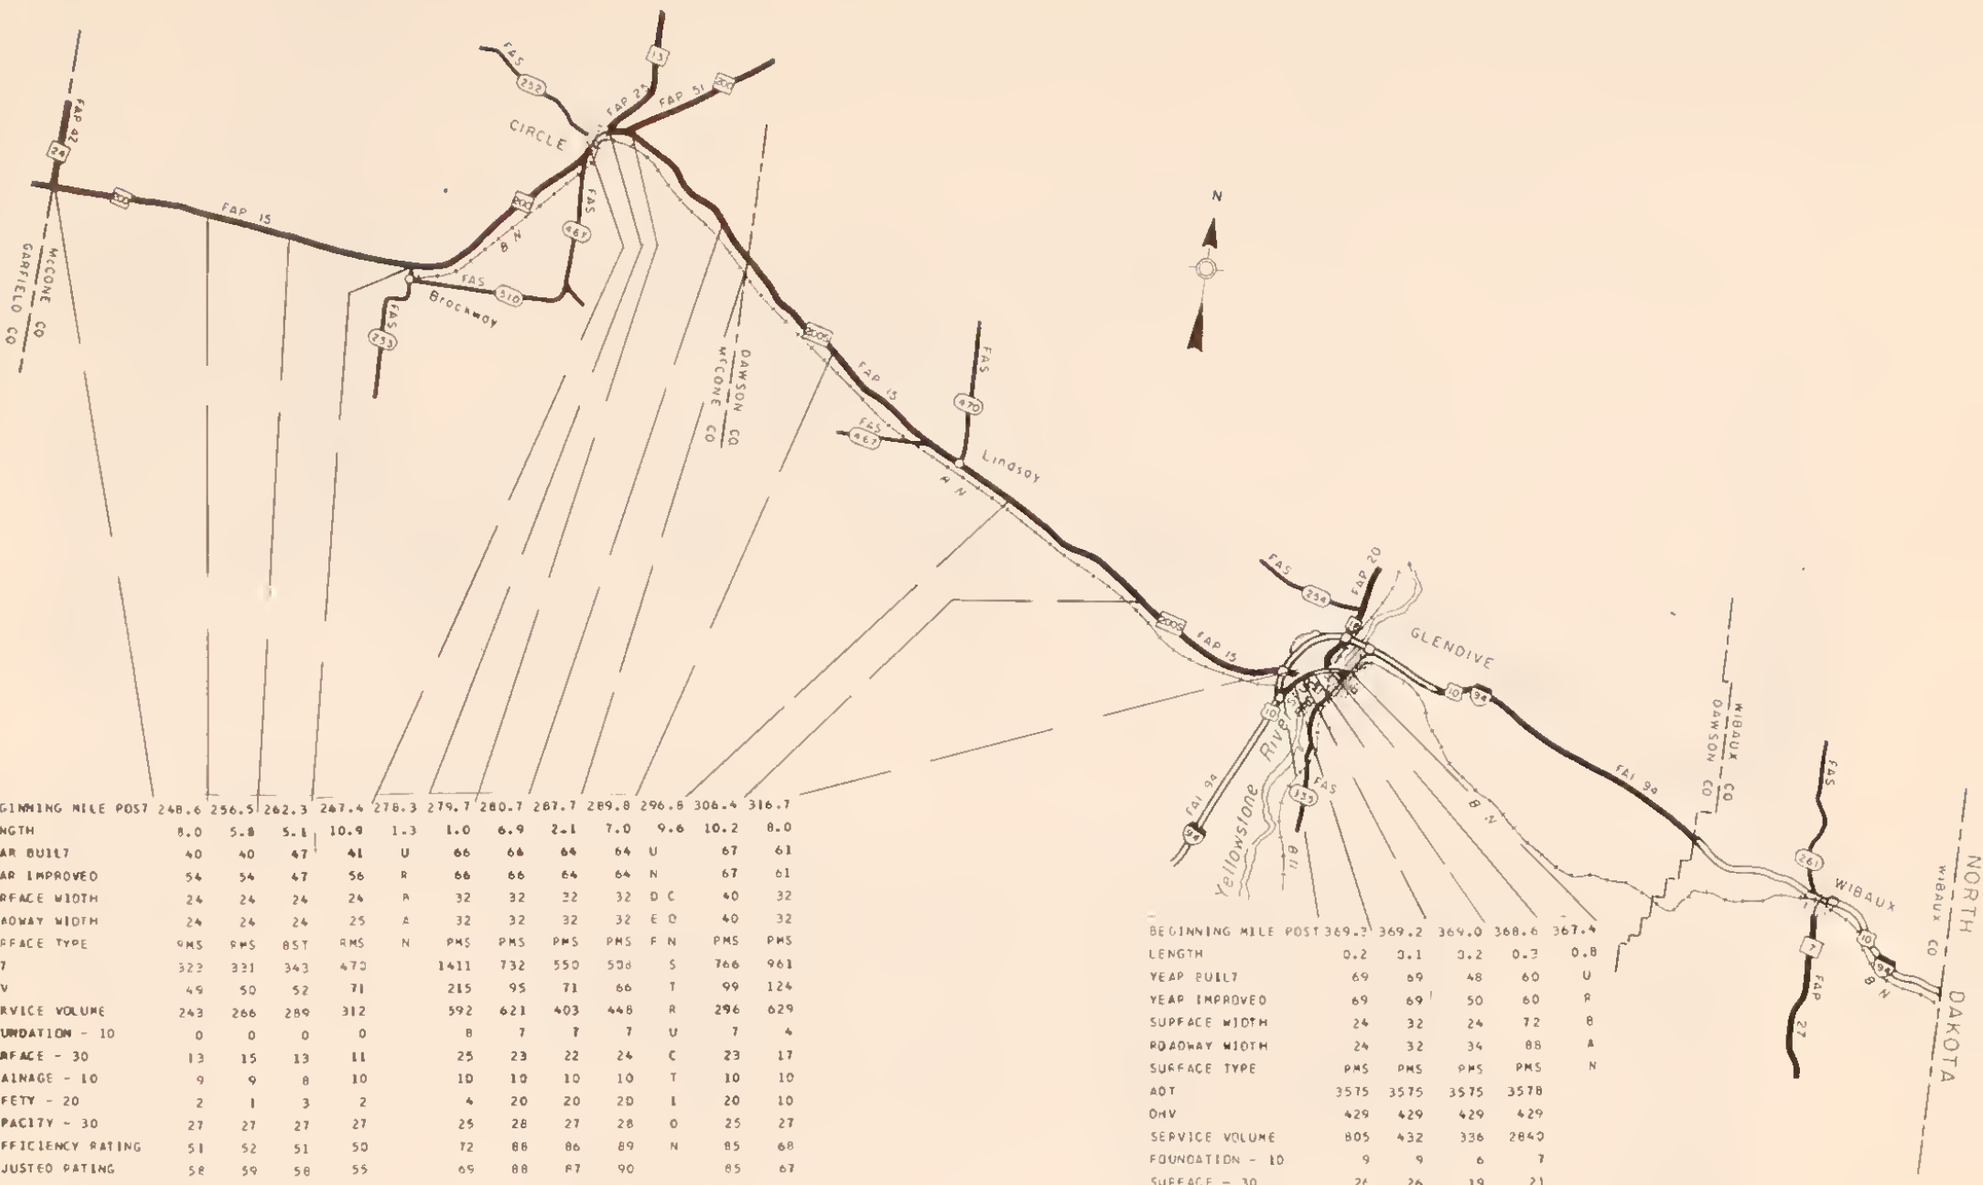

BEGINNING MILE POST	248.6	256.5	262.3	267.4	278.3	279.7	280.7	287.7	289.8	296.8	306.4	316.7
LENGTH	8.0	5.8	5.1	10.9	1.3	1.0	6.9	2.1	7.0	9.6	10.2	8.0
YEAR BUILT	40	40	47	41	U	66	64	64	64	U	67	61
YEAR IMPROVED	54	54	47	56	R	66	66	64	64	N	67	61
SURFACE WIDTH	24	24	24	24	R	32	32	32	32	D C	40	32
ROADWAY WIDTH	24	24	24	25	A	32	32	32	32	E O	40	32
SURFACE TYPE	PMS	PMS	BST	PMS	N	PMS	PMS	PMS	PMS	F N	PMS	PMS
ADT	322	331	343	470		1411	732	550	508	S	766	961
DHV	49	50	52	71		215	95	71	66	T	99	124
SERVICE VOLUME	243	266	289	312		592	621	403	448	R	296	629
FOUNDATION - 10	0	0	0	0		8	7	7	7	U	7	4
SURFACE - 30	13	15	13	11		25	23	22	24	C	23	17
DRAINAGE - 10	9	9	8	10		10	10	10	10	T	10	10
SAFETY - 20	2	1	3	2		4	20	20	20	I	20	10
CAPACITY - 30	27	27	27	27		25	28	27	28	O	25	27
SUFFICIENCY RATING	51	52	51	50		72	88	86	89	N	85	68
ADJUSTED RATING	58	59	58	55		69	88	87	90		85	67
DEFICIENT MILEAGE	3.92	2.78	2.54	5.47		.28	.83	.29	.77		1.53	2.56

BEGINNING MILE POST	369.3	369.2	369.0	368.6	367.4
LENGTH	0.2	0.1	0.2	0.3	0.8
YEAR BUILT	69	69	48	60	U
YEAR IMPROVED	69	69	50	60	R
SURFACE WIDTH	24	32	24	72	B
ROADWAY WIDTH	24	32	34	88	A
SURFACE TYPE	PMS	PMS	PMS	PMS	N
ADT	3575	3575	3575	3578	
DHV	429	429	429	429	
SERVICE VOLUME	805	432	336	2840	
FOUNDATION - 10	9	9	6	7	
SURFACE - 30	26	26	19	21	
DRAINAGE - 10	10	10	8	10	
SAFETY - 20	20	20	20	20	
CAPACITY - 30	22	15	11	28	
SUFFICIENCY RATING	87	80	64	86	
ADJUSTED RATING	82	73	55	81	
DEFICIENT MILEAGE	.03	.02	.07	.05	

FAP ROUTE NO 15
SHEET 4 OF 4

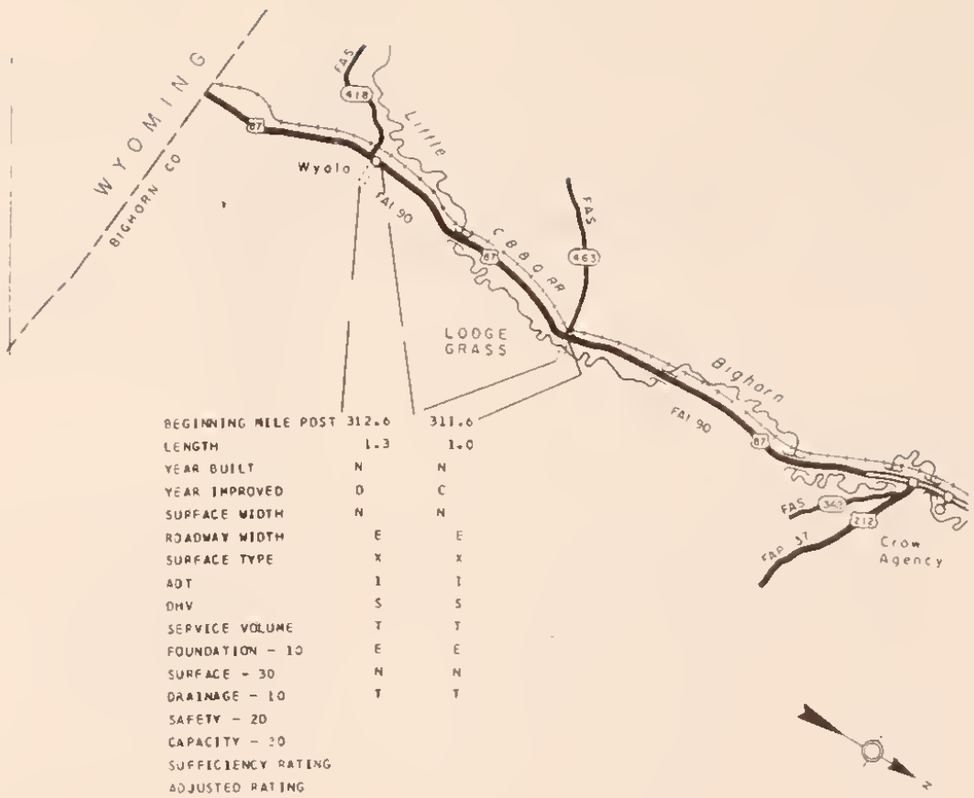

BEGINNING MILE POST	312.6	311.6
LENGTH	1.3	1.0
YEAR BUILT	N	N
YEAR IMPROVED	D	C
SURFACE WIDTH	N	N
ROADWAY WIDTH	E	E
SURFACE TYPE	X	X
ADT	I	I
DHV	S	S
SERVICE VOLUME	T	T
FOUNDATION - 10	E	E
SURFACE - 30	N	N
DRAINAGE - 10	T	T
SAFETY - 20		
CAPACITY - 30		
SUFFICIENCY RATING		
ADJUSTED RATING		
DEFICIENT MILEAGE		

FAP ROUTE NO 16
SHEET 1 OF 4

BEGINNING MILE POST	104.1	108.8	113.9	125.5	127.2	129.1	133.6	142.1	150.2
LENGTH	4.7	5.0	11.6	1.7	1.8	4.5	8.4	8.0	1.8
YEAR BUILT	U	34	34	68	34	34	66	65	32
YEAR IMPROVED	R	51	51	68	58	34	66	65	32
SURFACE WIDTH	B	20	20	40	22	22	32	32	20
ROADWAY WIDTH	A	24	24	40	24	24	32	32	24
SURFACE TYPE	N	BST	BST	PMS	PMS	PMS	PMS	PMS	BST
ADT		1565	1167	1100	1107	1149	1261	1416	1563
DHV		233	151	143	143	149	163	184	203
SERVICE VOLUME		396	255	403	272	502	548	720	283
FOUNDATION - 10		0	0	8	0	0	8	7	0
SURFACE - 30		10	11	27	13	9	24	23	13
DRAINAGE - 10		5	6	10	7	6	10	10	8
SAFETY - 20		1	1	12	1	1	8	9	1
CAPACITY - 30		22	21	25	22	26	26	26	19
SUFFICIENCY RATING		38	39	82	43	42	76	75	41
ADJUSTED RATING		34	37	81	41	40	74	72	37
DEFICIENT MILEAGE		3.14	7.12	.31	1.03	2.61	2.03	2.00	1.08

154.4	155.0	161.0	170.1	BEGINNING MILE POST
0.6	5.9	9.0	5.7	LENGTH
U	50	35	35	YEAR BUILT
P	54	35	35	YEAR IMPROVED
B	24	20	20	SURFACE WIDTH
A	30	24	24	ROADWAY WIDTH
N	PMS	BST	BST	SURFACE TYPE
	1074	832	638	ADT
	139	108	82	DHV
	340	425	425	SERVICE VOLUME
	0	0	0	FOUNDATION - 10
	13	7	9	SURFACE - 30
	10	4	5	DRAINAGE - 10
	7	4	2	SAFETY - 20
	24	26	27	CAPACITY - 30
	54	41	43	SUFFICIENCY RATING
	53	41	45	ADJUSTED RATING
	2.73	5.32	3.29	DEFICIENT MILEAGE

FAP ROUTE NO 16
SHEET 2 OF 4

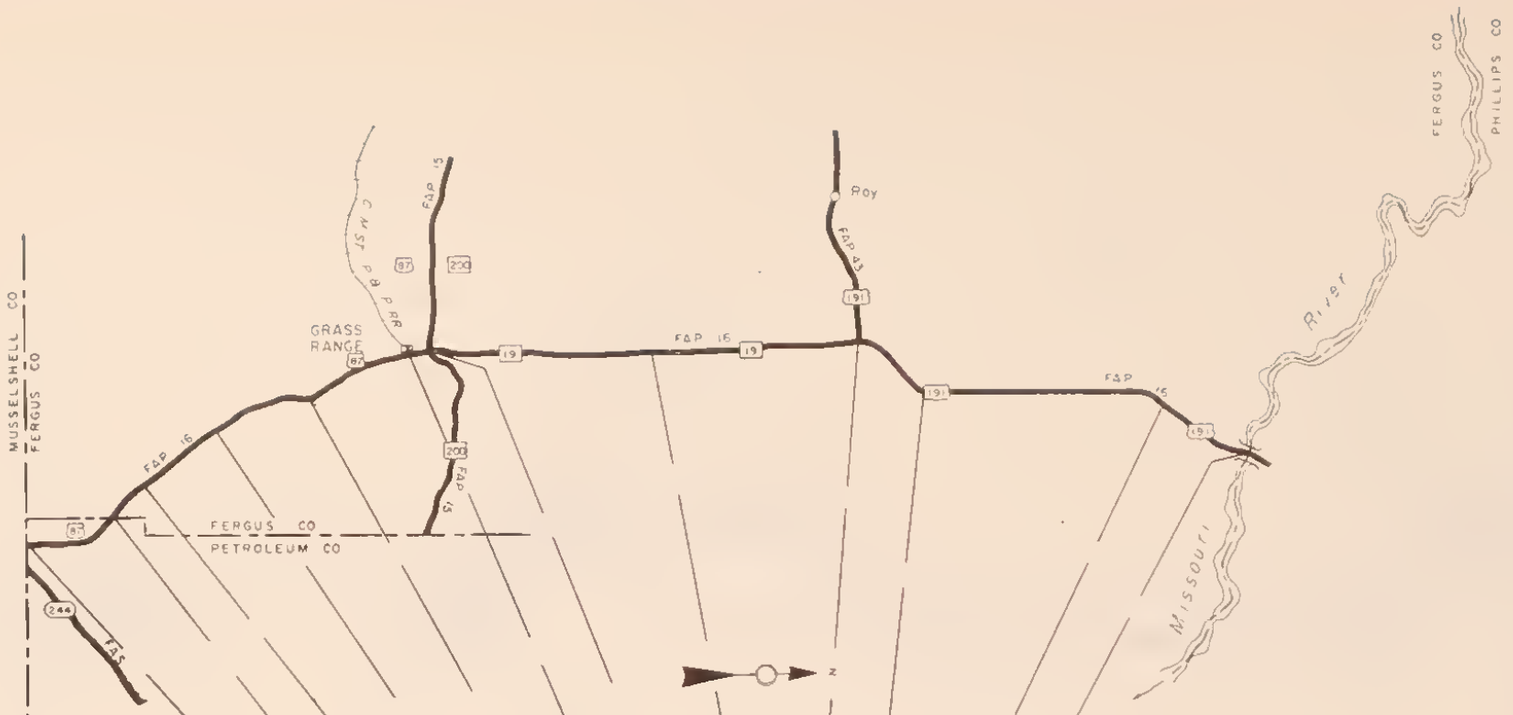

BEGINNING MILE POST	175.8	180.6	181.7	187.8	192.6	197.5	199.1	208.8	220.6	224.4	237.4	BEGINNING MILE POST
LENGTH	4.7	1.1	6.0	4.8	4.8	1.5	9.6	11.8	3.8	12.9	4.5	LENGTH
YEAR BUILT	63	63	65	52	41	62	62	61	62	59	60	YEAR BUILT
YEAR IMPROVED	63	63	65	52	65	62	62	61	62	64	60	YEAR IMPROVED
SURFACE WIDTH	30	30	30	24	24	32	30	30	30	28	28	SURFACE WIDTH
ROADWAY WIDTH	30	30	30	28	30	32	30	30	30	28	28	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	RMS	RMS	PMS	PMS	PMS	PMS	RMS	PMS	SURFACE TYPE
ADT	425	403	425	469	619	728	346	323	398	322	328	ADT
DHV	55	52	55	60	80	122	58	54	66	54	53	DHV
SERVICE VOLUME	576	367	432	377	367	569	554	583	414	629	749	SERVICE VOLUME
FOUNDATION - 10	7	7	7	3	0	4	0	0	3	0	0	FOUNDATION - 10
SURFACE - 30	21	19	21	14	13	18	12	12	16	11	9	SURFACE - 30
DRAINAGE - 10	10	10	10	10	9	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	16	1	7	6	2	20	6	17	11	20	6	SAFETY - 20
CAPACITY - 30	29	28	28	28	27	27	28	29	28	29	29	CAPACITY - 30
SUFFICIENCY RATING	83	65	73	61	51	79	56	68	68	70	54	SUFFICIENCY RATING
ADJUSTED RATING	86	70	77	65	54	80	63	74	73	76	61	ADJUSTED RATING
DEFICIENT MILEAGE	.80	.39	1.63	1.90	2.39	.32	4.24	3.78	1.24	3.88	2.10	DEFICIENT MILEAGE

FAP ROUTE NO 16
SHEET 3 OF 4

BEGINNING MILE POST	242.0	247.5	257.2	260.8	264.3	272.1	278.4	284.3	290.7	296.0	301.3	309.5	310.9	BEGINNING MILE POST
LENGTH	5.5	9.7	3.6	3.4	7.8	6.2	5.9	6.3	5.2	5.2	8.1	1.3	0.6	LENGTH
YEAR BUILT	60	60	57	57	57	49	47	42	42	42	38	38	U	YEAR BUILT
YEAR IMPROVED	60	60	59	59	59	49	47	42	61	61	42	42	R	YEAR IMPROVED
SURFACE WIDTH	28	28	24	24	24	22	25	20	22	22	24	24	B	SURFACE WIDTH
ROADWAY WIDTH	28	28	29	29	29	22	25	24	24	24	26	26	A	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	BST	BST	RMS	RMS	RMS	RMS	PMS	N	SURFACE TYPE
ADT	325	319	250	218	179	177	182	190	207	225	314	979		ADT
DHV	54	53	42	36	30	29	30	31	34	37	52	164		DHV
SERVICE VOLUME	477	902	531	558	353	417	515	634	711	243	255	416		SERVICE VOLUME
FOUNDATION - 10	0	0	0	2	2	0	0	0	0	0	0	0		FOUNDATION - 10
SURFACE - 30	11	10	16	16	16	10	8	10	10	15	12	14		SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	7	8	8	6	9	8	8		DRAINAGE - 10
SAFETY - 20	7	18	20	17	8	14	5	4	20	2	4	5		SAFETY - 20
CAPACITY - 30	28	29	25	29	25	25	29	29	24	28	28	24		CAPACITY - 30
SUFFICIENCY RATING	56	67	75	74	65	60	50	51	67	54	52	51		SUFFICIENCY RATING
ADJUSTED RATING	63	73	82	82	76	71	61	62	76	64	59	50		ADJUSTED RATING
DEFICIENT MILEAGE	2.45	3.20	.91	.90	2.73	2.50	2.96	3.13	1.74	2.42	3.89	.68		DEFICIENT MILEAGE

FAP ROUTE NO 16
SHEET 4 OF 4

BEGINNING MILE POST	0.0	6.1	8.3	9.0	18.6	19.1	22.3	29.6	31.3	35.4	36.5	37.8	38.6	43.8	BEGINNING MILE POST
LENGTH	6.1	2.1	0.6	10.0	0.5	3.2	7.3	1.5	4.0	1.0	1.2	0.8	5.1	1.0	LENGTH
YEAR BUILT	48	54	62	C	71	29	31	66	31	U	31	55	31	49	YEAR BUILT
YEAR IMPROVED	48	54	62	O	71	41	57	66	57	R	57	55	49	49	YEAR IMPROVED
SURFACE WIDTH	28	24	32	I	26	24	22	28	24	B	24	24	24	24	SURFACE WIDTH
ROADWAY WIDTH	30	32	32	N	26	26	26	28	30	A	30	32	24	32	ROADWAY WIDTH
SURFACE TYPE	RMS	PMS	PMS	C	PMS	BST	RMS	RMS	RMS	N	RMS	RMS	RMS	RMS	SURFACE TYPE
ADT	653	212	175	1	168	168	130	122	157		110	94	85	80	ADT
DHV	84	27	22	0	21	21	16	15	20		15	14	12	10	DHV
SERVICE VOLUME	631	680	365	E	671	889	456	531	530		951	424	312	616	SERVICE VOLUME
FOUNDATION - 10	2	0	10	N	9	0	0	8	0		0	6	0	5	FOUNDATION - 10
SURFACE - 30	17	14	25	Y	28	10	13	23	14		11	16	14	16	SURFACE - 30
DRAINAGE - 10	10	10	10		10	5	6	10	6		5	9	5	8	DRAINAGE - 10
SAFETY - 20	12	11	1		0	4	2	2	1		20	20	1	0	SAFETY - 20
CAPACITY - 30	28	29	29		30	30	29	30	29		30	30	29	30	CAPACITY - 30
SUFFICIENCY RATING	69	64	75		77	49	50	73	50		66	81	49	56	SUFFICIENCY RATING
ADJUSTED RATING	71	74	84		85	61	64	84	63		80	91	66	76	ADJUSTED RATING
DEFICIENT MILEAGE	1.91	.78	.16		.13	1.67	3.66	.42	2.01		.43	.16	2.61	.42	DEFICIENT MILEAGE

FAP ROUTE NO 17
SHEET 1 OF 1

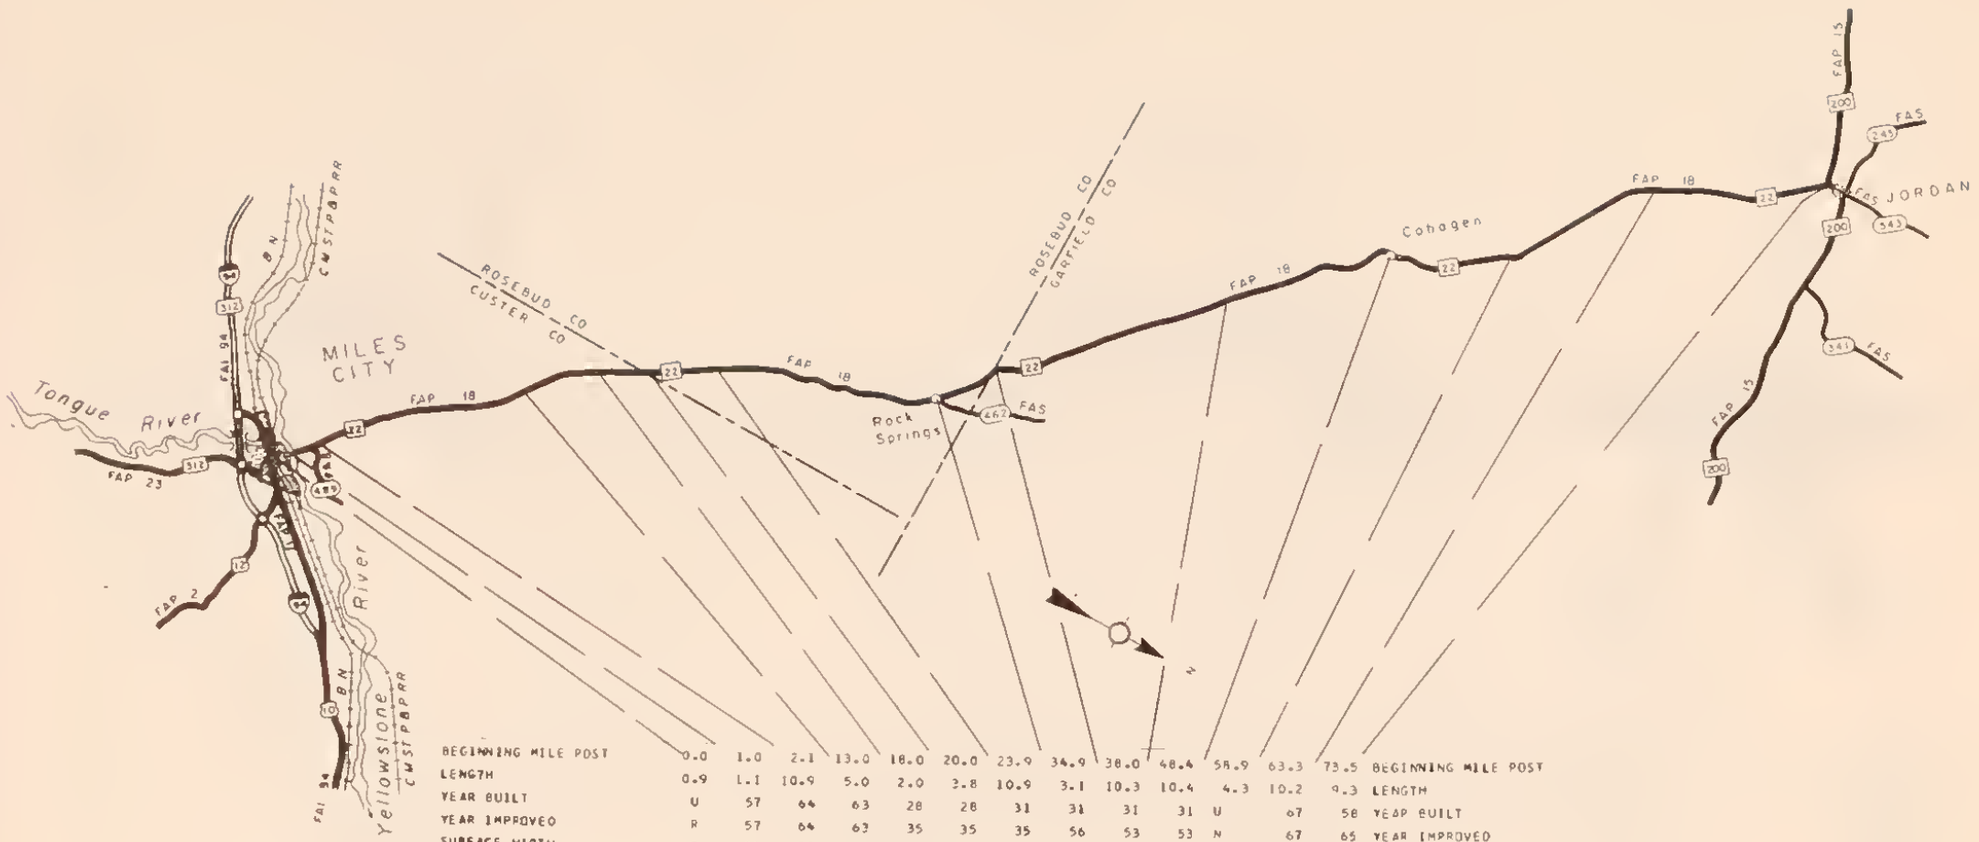

BEGINNING MILE POST	0.0	1.0	2.1	13.0	18.0	20.0	23.9	34.9	38.0	48.4	58.9	63.3	73.5	BEGINNING MILE POST
LENGTH	0.9	1.1	10.9	5.0	2.0	3.8	10.9	3.1	10.3	10.4	4.3	10.2	9.3	LENGTH
YEAR BUILT	U	57	64	63	28	28	31	31	31	31	U	67	58	YEAR BUILT
YEAR IMPROVED	R	57	64	63	35	35	35	56	53	53	N	67	65	YEAR IMPROVED
SURFACE WIDTH	B	32	30	30	20	20	20	20	20	20	D C	30	28	SURFACE WIDTH
ROADWAY WIDTH	A	32	30	30	24	24	24	24	24	24	E O	30	28	ROADWAY WIDTH
SURFACE TYPE	N	BST	PMS	PMS	BST	BST	BST	BST	RMS	RMS	R N	PMS	PMS	SURFACE TYPE
ADT		2030	417	275	263	255	218	179	180	183	S	208	291	ADT
DHV		263	54	35	34	33	28	23	23	23	T	27	37	DHV
SERVICE VOLUME		504	600	663	655	627	448	422	448	470	F	702	472	SERVICE VOLUME
FOUNDATION - 10		6	5	4	0	0	0	0	0	0	U	7	7	FOUNDATION - 10
SURFACE - 30		21	18	15	8	9	8	10	7	8	C	24	25	SURFACE - 30
DRAINAGE - 10		10	10	10	8	8	7	7	7	5	T	10	10	DRAINAGE - 10
SAFETY - 20		8	9	11	13	3	1	1	1	2	I	13	6	SAFETY - 20
CAPACITY - 30		22	29	29	29	29	29	29	29	29	O	29	29	CAPACITY - 30
SUFFICIENCY RATING		67	71	65	58	49	45	47	44	44	N	83	77	SUFFICIENCY RATING
ADJUSTED RATING		62	75	76	67	58	55	59	55	55		89	83	ADJUSTED RATING
DEFICIENT MILEAGE		.38	3.16	1.55	.84	1.98	6.02	1.68	5.81	5.86		1.73	2.15	DEFICIENT MILEAGE

FAP ROUTE NO 18
SHEET 1 OF 1

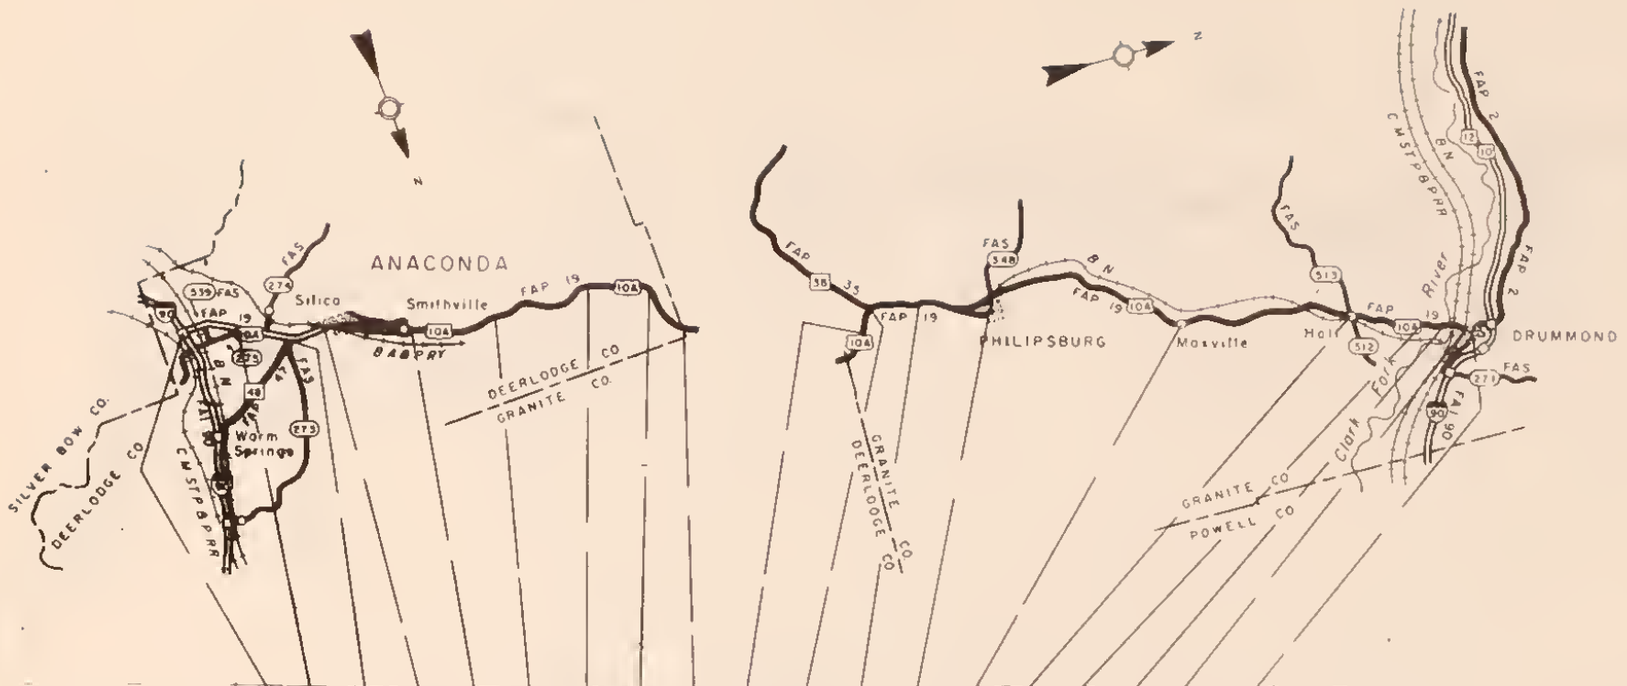

BEGINNING MILE POST	0.0	2.8	5.5	7.1	12.3	16.9	22.0	24.3	27.6	30.8	31.6	34.4	38.5	48.3	57.4	62.5	63.2	63.6	BEGINNING MILE POST
LENGTH	2.8	2.6	1.5	5.2	4.5	5.0	2.2	3.3	3.1	0.8	2.7	4.1	9.7	9.1	5.0	0.6	0.4	0.2	LENGTH
YEAR BUILT	64	61	61	U	51	51	51	34	34	57	57	57	60	31	25	66	66	U	YEAR BUILT
YEAR IMPROVED	64	61	61	R	59	59	59	54	40	57	57	57	60	52	52	66	66	R	YEAR IMPROVED
SURFACE WIDTH	76	76	76	B	28	28	32	22	20	32	32	32	32	20	20	40	32	B	SURFACE WIDTH
ROADWAY WIDTH	76	76	76	A	28	28	32	24	24	32	32	32	32	24	22	40	32	A	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	M	PMS	PMS	PMS	RMS	RMS	BST	BST	BST	PMS	RMS	RMS	PMS	PMS	N	SURFACE TYPE
ADT	2916	3878	5537		2049	1714	1482	1084	704	540	509	459	491	509	677	785	712		ADT
DHV	379	504	719		297	248	214	157	102	78	73	66	71	73	98	113	103		DHV
SERVICE VOLUME	2208	2208	2232		454	501	456	197	224	340	768	737	428	683	471	240	720		SERVICE VOLUME
FOUNDATION - 10	9	9	10		4	4	0	3	0	3	0	0	5	0	0	10	10		FOUNDATION - 10
SURFACE - 30	28	26	26		16	17	18	14	12	16	8	16	17	7	9	27	26		SURFACE - 30
DRAINAGE - 10	10	10	10		10	10	8	7	6	10	10	10	10	3	3	10	10		DRAINAGE - 10
SAFETY - 20	12	18	15		20	10	15	2	0	2	18	6	11	2	1	6	9		SAFETY - 20
CAPACITY - 30	27	27	25		20	23	23	18	23	27	25	25	28	28	27	23	28		CAPACITY - 30
SUFFICIENCY RATING	86	90	86		70	64	64	44	41	58	65	55	71	40	40	76	83		SUFFICIENCY RATING
ADJUSTED RATING	82	86	79		65	59	60	42	43	61	69	60	74	44	42	76	84		ADJUSTED RATING
DEFICIENT MILEAGE	.40	.26	.21		1.35	1.82	.81	1.89	1.84	.34	.45	1.87	2.81	5.48	3.04	.15	.07		DEFICIENT MILEAGE

FAP ROUTE NO 19
SHEET 1 OF 1

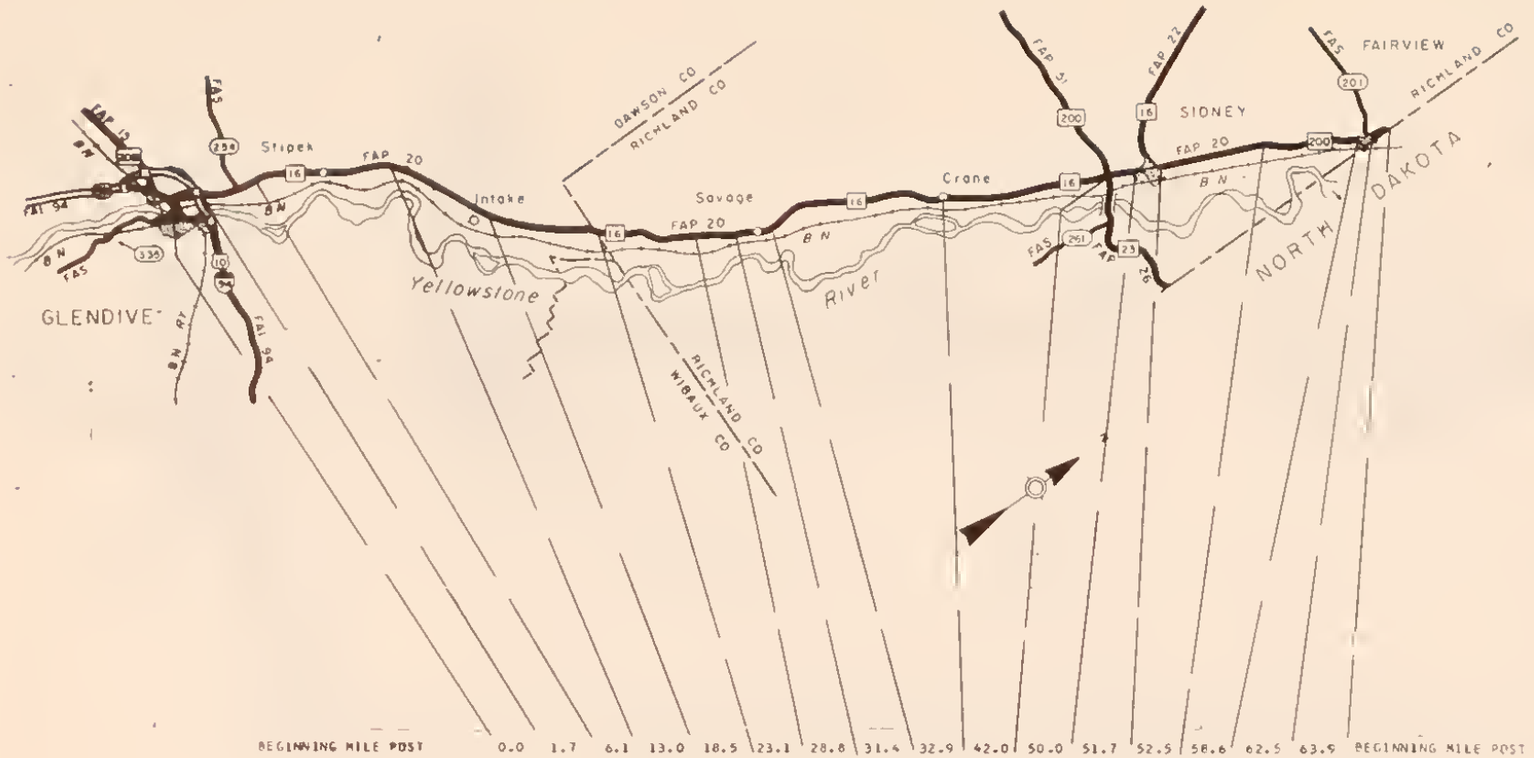

BEGINNING MILE POST	0.0	1.7	6.1	13.0	18.5	23.1	28.8	31.4	32.9	42.0	50.0	51.7	52.5	58.6	62.5	63.9	BEGINNING MILE POST
LENGTH	1.7	4.3	6.8	5.6	4.1	5.7	2.5	1.4	9.0	7.9	1.7	0.8	6.0	3.9	1.2	0.3	LENGTH
YEAR BUILT	U	64	67	69	54	54	75	74	34	73	73	U	35	35	U	56	YEAR BUILT
YEAR IMPROVED	R	64	67	69	54	54	75	74	57	73	73	R	35	35	R	56	YEAR IMPROVED
SURFACE WIDTH	8	40	40	40	28	28	40	40	20	40	83	8	20	20	8	24	SURFACE WIDTH
ROADWAY WIDTH	A	40	40	40	28	28	40	40	24	40	83	A	24	24	A	32	ROADWAY WIDTH
SURFACE TYPE	N	PMS	PMS	PMS	PMS	RMS	PMS	PMS	RMS	PMS	PMS	N	PMS	RMS	N	RMS	SURFACE TYPE
ADT		1489	970	855	884	1041	1217	1309	1296	1601	3539		2444	1612		1400	ADT
DHV		193	126	111	114	135	158	170	168	208	460		317	209		182	DHV
SERVICE VOLUME		222	643	184	434	301	281	266	377	281	1760		421	280		828	SERVICE VOLUME
FOUNDATION - 10		8	8	7	0	2	10	10	0	10	9		0	0		8	FOUNDATION - 10
SURFACE - 30		24	26	25	14	17	30	30	12	30	28		11	11		21	SURFACE - 30
DRAINAGE - 10		10	10	10	10	10	10	10	8	10	10		5	5		10	DRAINAGE - 10
SAFETY - 20		9	10	6	8	10	9	2	3	13	6		5	2		1	SAFETY - 20
CAPACITY - 30		17	27	21	26	23	22	20	23	19	26		19	19		27	CAPACITY - 30
SUFFICIENCY RATING		68	81	69	58	62	81	72	46	82	79		40	37		67	SUFFICIENCY RATING
ADJUSTED RATING		65	80	69	58	61	79	70	43	79	72		33	33		64	ADJUSTED RATING
DEFICIENT MILEAGE		1.40	1.30	1.73	1.75	2.19	.49	.41	4.88	1.43	.36		3.63	2.46		.11	DEFICIENT MILEAGE

FAP ROUTE NO 20
SHEET 1 OF 1

BEGINNING MILE POST	44.5	45.3	47.7	49.0	57.0
LENGTH	0.8	2.6	1.2	8.7	9.5
YEAR BUILT	72	64	U	51	72
YEAR IMPROVED	72	64	R	65	72
SURFACE WIDTH	40	24	B	32	34
ROADWAY WIDTH	40	26	A	32	34
SURFACE TYPE	PMS	RMS	N	RMS	PMS
ADT	652	891		336	526
DHV	84	115		43	68
SERVICE VOLUME	616	264		428	720
FOUNDATION - 10	10	0		4	10
SURFACE - 30	30	11		16	30
DRAINAGE - 10	10	8		10	10
SAFETY - 20	2	2		7	10
CAPACITY - 30	28	23		28	29
SUFFICIENCY RATING	80	44		65	89
ADJUSTED RATING	81	44		71	90
DEFICIENT MILEAGE	.16	1.58		3.05	.05

FAP ROUTE NO 21
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.5	7.5	17.9	20.9	29.3	41.1	42.3	43.3	52.6	63.7	63.8	64.0	64.3	BEGINNING MILE POST
LENGTH	0.5	7.0	10.2	3.0	8.4	11.8	1.1	1.0	9.2	11.1	0.1	0.2	0.2	7.5	LENGTH
YEAR BUILT	U	65	35	36	36	37	U	33	33	63	U	63	L	U	YEAR BUILT
YEAR IMPROVED	R	65	36	36	36	37	R	36	36	63	P	63	R	N	YEAR IMPROVED
SURFACE WIDTH	B	32	20	22	22	20	B	20	20	32	B	32	B	O	SURFACE WIDTH
ROADWAY WIDTH	A	32	24	25	25	24	A	24	24	32	A	32	A	E	ROADWAY WIDTH
SURFACE TYPE	N	PMS	BST	BST	BST	PMS	N	PMS	PMS	PMS	N	PMS	N	R	SURFACE TYPE
ADT		580	412	312	347	606		1838	953	689		603			ADT
DHV		87	61	46	52	90		275	142	103		90			DHV
SERVICE VOLUME		672	784	249	435	406		564	352	672		896			SERVICE VOLUME
FOUNDATION - 10		8	0	0	0	0		0	0	6		7			FOUNDATION - 10
SURFACE - 30		23	12	12	14	11		14	14	21		23			SURFACE - 30
DRAINAGE - 10		10	8	8	9	9		10	9	10		10			DRAINAGE - 10
SAFETY - 20		20	1	2	4	3		10	2	11		20			SAFETY - 20
CAPACITY - 30		28	25	27	28	27		23	24	28		28			CAPACITY - 30
SUFFICIENCY RATING		89	46	49	55	50		57	49	82		88			SUFFICIENCY RATING
ADJUSTED RATING		90	51	57	62	53		52	48	83		89			ADJUSTED RATING
DEFICIENT MILEAGE		.77	5.54	1.54	3.79	5.92		.44	4.70	2.00		.03			DEFICIENT MILEAGE

FAP ROUTE NO 22
SHEET 1 OF 2

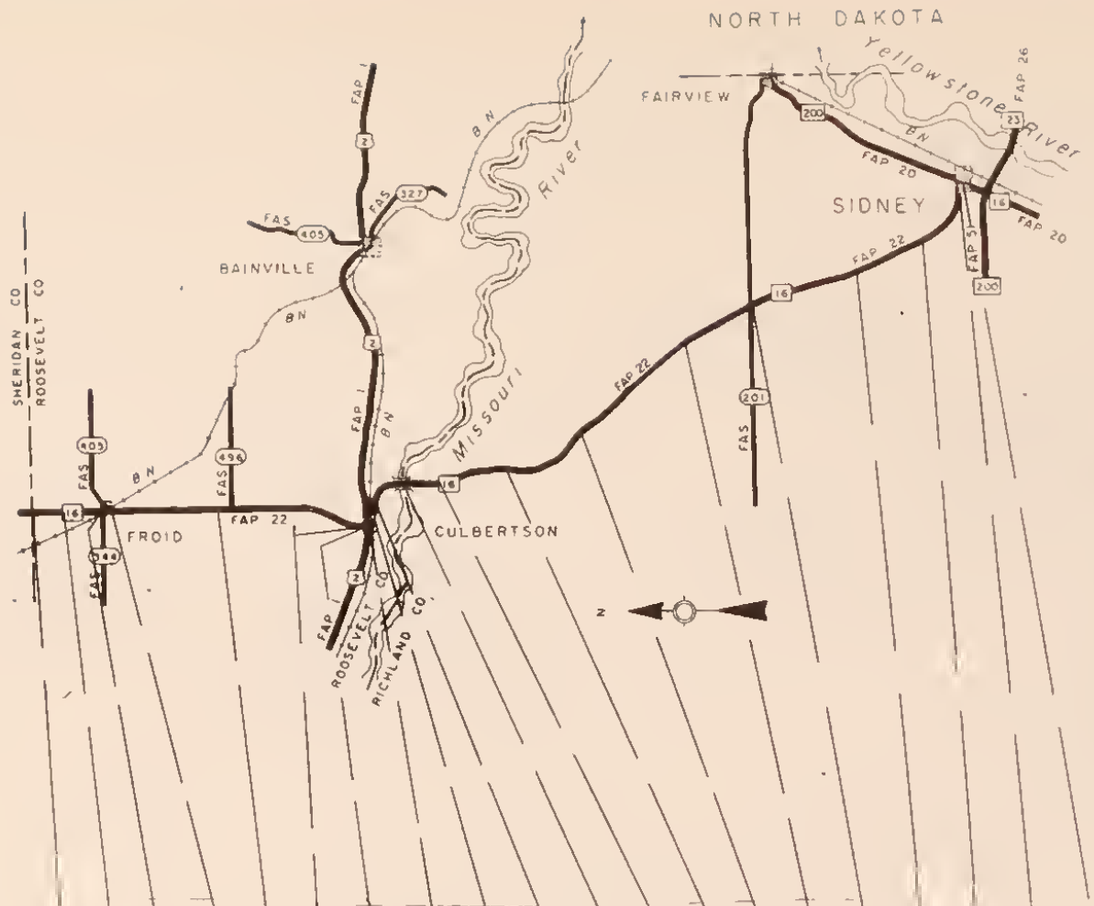

BEGINNING MILE POST	71.8	73.8	75.8	75.8	81.3	88.4	88.6	88.7	89.5	90.0	91.9	93.5	96.8	100.1	108.2	112.9	117.7	121.3	125.0	BEGINNING MILE POST
LENGTH	2.0	1.9	0.1	5.4	7.1	0.1	0.1	0.8	0.4	1.8	1.6	3.2	3.3	8.0	4.6	4.7	3.6	3.6	1.0	LENGTH
YEAR BUILT	U	71	U	71	59	U	C	U	61	33	34	37	70	40	40	40	38	37	U	YEAR BUILT
YEAR IMPROVED	N	71	R	71	59	R	O	R	61	58	36	41	70	49	49	49	49	49	R	YEAR IMPROVED
SURFACE WIDTH	O C	32	B	32	32	B	I	B	36	20	20	24	34	24	24	24	24	24	B	SURFACE WIDTH
ROADWAY WIDTH	E O	32	A	32	32	A	N	A	36	24	24	26	34	26	26	26	26	26	A	ROADWAY WIDTH
SURFACE TYPE	R N	PMS	N	PMS	PMS	N	C	N	PMS	RMS	BST	BST	PMS	BST	RMS	RMS	RMS	RMS	N	SURFACE TYPE
ADT	S	606		665	726		I		626	583	551	544	517	559	685	820	943	2015		ADT
DHV	T	90		99	108		O		93	87	82	81	77	83	102	123	141	302		DHV
SERVICE VOLUME	R	576		640	456		E		560	311	515	470	360	448	448	277	387	277		SERVICE VOLUME
FOUNDATION - 10	U	10		10	2		N		7	0	0	0	8	0	0	2	2	0		FOUNDATION - 10
SURFACE - 30	C	25		24	14		T		16	9	8	10	24	8	8	17	17	11		SURFACE - 30
DRAINAGE - 10	T	10		10	10				10	7	10	7	10	8	8	8	8	5		DRAINAGE - 10
SAFETY - 20	I	20		12	20				5	2	4	20	20	16	3	3	6	3		SAFETY - 20
CAPACITY - 30	O	28		28	26				28	26	28	27	27	27	27	23	25	14		CAPACITY - 30
SUFFICIENCY RATING	N	53		84	72				66	44	50	64	89	59	46	53	58	37		SUFFICIENCY RATING
ADJUSTED RATING		93		85	73				68	47	53	67	90	62	48	53	57	31		ADJUSTED RATING
DEFICIENT MILEAGE		.13		.87	2.00				.16	1.04	.82	1.17	.36	3.31	2.51	2.23	1.52	2.30		DEFICIENT MILEAGE

FAP ROUTE NO 22
SHEET 2 OF 2

BEGINNING MILE POST		0.0	2.0	2.1	5.4	14.6	25.1	27.8	33.3	44.1	47.8	BEGINNING MILE POST
LENGTH		1.7	0.1	3.2	9.1	10.5	2.6	5.5	10.7	3.7	2.7	LENGTH
YEAR BUILT	U		20	20	36	62	62	31	31	32	52	YEAR BUILT
YEAR IMPROVED	R		36	36	36	62	62	47	47	60	52	YEAR IMPROVED
SURFACE WIDTH	B		25	22	22	30	30	20	20	18	22	SURFACE WIDTH
ROADWAY WIDTH	A		25	25	25	30	30	24	24	24	28	ROADWAY WIDTH
SURFACE TYPE	N		RMS	PMS	RMS	PMS	PMS	BST	BST	RMS	PMS	SURFACE TYPE
ADT			1304	1078	705	429	410	999	383	368	359	ADT
DHV			169	140	102	62	59	57	55	53	52	DHV
SERVICE VOLUME			303	348	425	510	485	492	469	316	196	SERVICE VOLUME
FOUNDATION - 10			0	0	0	4	6	0	0	0	0	FOUNDATION - 10
SURFACE - 30			11	11	10	14	16	8	8	9	11	SURFACE - 30
DRAINAGE - 10			8	8	7	10	10	7	4	4	10	DRAINAGE - 10
SAFETY - 20			20	1	2	11	13	3	5	2	3	SAFETY - 20
CAPACITY - 30			22	24	26	28	28	28	28	27	26	CAPACITY - 30
SUFFICIENCY RATING			61	44	45	67	73	46	45	42	50	SUFFICIENCY RATING
ADJUSTED RATING			58	43	47	72	77	52	51	48	57	ADJUSTED RATING
DEFICIENT MILEAGE			.02	1.83	5.02	3.48	.73	2.98	5.93	2.15	1.35	DEFICIENT MILEAGE

FAP ROUTE NO 23
SHEET 1 OF 2

BEGINNING MILE POST	50.5	55.7	64.5	72.9	76.3	77.8	79.1	79.7	83.0	85.5	95.5	101.5	108.4	119.4	130.3	BEGINNING MILE POST
LENGTH	5.1	8.7	8.3	3.3	1.5	1.3	0.5	3.3	2.4	10.0	6.0	6.8	11.0	10.8	9.5	LENGTH
YEAR BUILT	52	49	29	28	69	28	U	40	31	53	54	54	55	55	65	YEAR BUILT
YEAR IMPROVED	60	55	41	41	69	36	R	40	56	53	54	54	73	55	65	YEAR IMPROVED
SURFACE WIDTH	24	24	24	24	28	20	P	24	20	24	24	24	28	28	40	SURFACE WIDTH
ROADWAY WIDTH	28	24	24	24	28	22	A	24	24	28	28	28	28	28	40	ROADWAY WIDTH
SURFACE TYPE	RMS	RMS	BST	BST	PMS	BST	N	RMS	PMS	RMS	PMS	RMS	PMS	BST	PMS	SURFACE TYPE
ADT	346	339	373	512	1189	1484		1040	552	550	550	554	568	642	668	ADT
DHV	50	49	54	74	172	215		150	80	79	79	80	82	93	100	DHV
SERVICE VOLUME	378	217	258	258	276	250		297	203	266	462	462	486	510	260	SERVICE VOLUME
FOUNDATION - 10	0	0	0	2	5	0		0	0	0	0	2	0	4	3	FOUNDATION - 10
SURFACE - 30	11	11	15	17	28	13		13	13	12	11	13	15	17	22	SURFACE - 30
DRAINAGE - 10	10	9	10	8	10	4		5	7	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	9	1	3	2	20	1		8	3	3	12	20	20	20	20	SAFETY - 20
CAPACITY - 30	28	27	27	26	21	17		22	24	26	27	27	27	27	24	CAPACITY - 30
SUFFICIENCY RATING	58	48	55	55	88	35		52	47	51	61	72	72	78	79	SUFFICIENCY RATING
ADJUSTED RATING	65	55	61	59	87	31		51	50	54	64	75	74	79	80	ADJUSTED RATING
DEFICIENT MILEAGE	2.17	4.57	3.77	1.52	.18	.84		1.62	1.25	4.50	2.35	1.42	3.08	2.38	2.00	DEFICIENT MILEAGE

FAP ROUTE NO 23
SHEET 2 OF 2

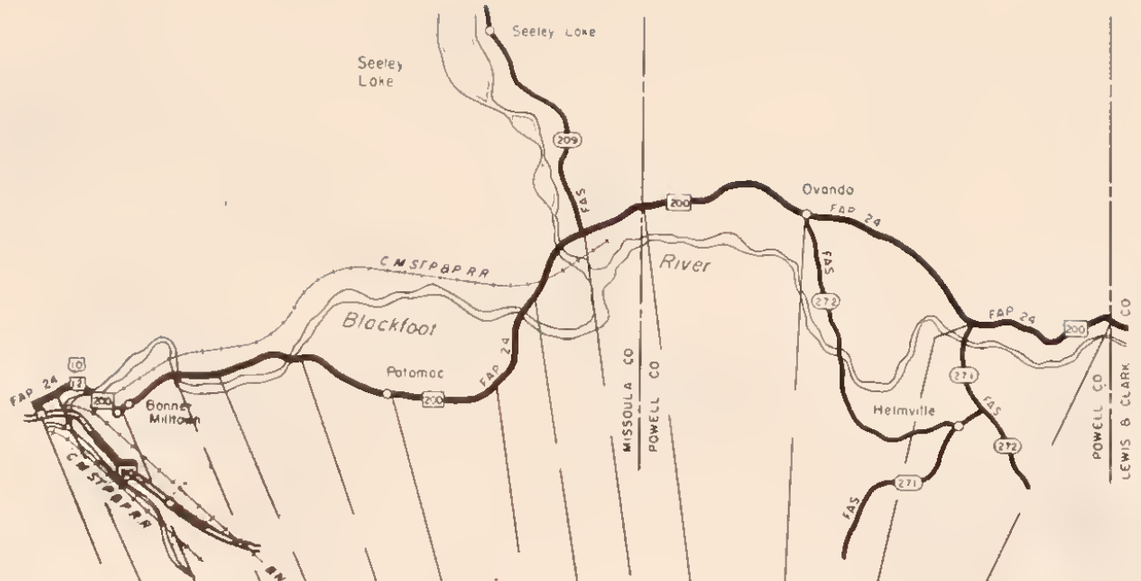

BEGINNING MILE POST	0.0	0.9	1.8	4.9	7.5	12.2	16.0	22.6	26.7	31.8	35.6	43.1	55.6	BEGINNING MILE POST
LENGTH	0.9	0.8	4.0	2.6	4.6	3.8	6.5	4.0	5.1	3.7	7.4	12.5	9.8	LENGTH
YEAR BUILT	74	74	36	68	40	41	68	41	49	54	61	61	61	YEAR BUILT
YEAR IMPROVED	74	74	37	68	42	63	68	49	49	54	61	61	61	YEAR IMPROVED
SURFACE WIDTH	44	44	30	40	20	24	40	25	25	24	24	24	24	SURFACE WIDTH
ROADWAY WIDTH	44	44	30	40	24	24	40	25	25	30	26	26	26	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	RMS	PMS	RMS	RMS	PMS	BST	BST	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	4008	2856	2062	1906	1737	1671	1645	1615	1414	1137	1207	1186	1141	ADT
OHV	661	471	340	314	286	275	271	266	233	187	199	195	188	OHV
SERVICE VOLUME	344	442	258	450	260	145	420	182	438	499	316	299	184	SERVICE VOLUME
FOUNDATION - 10	10	10	3	8	0	0	8	0	0	0	7	6	6	FOUNDATION - 10
SURFACE - 30	28	30	16	26	13	14	23	8	8	10	21	19	21	SURFACE - 30
DRAINAGE - 10	10	10	4	10	5	6	10	7	8	10	10	10	10	DRAINAGE - 10
SAFETY - 20	2	2	1	10	2	2	16	13	9	7	5	7	2	SAFETY - 20
CAPACITY - 30	1	14	10	20	14	2	20	8	22	24	21	20	15	CAPACITY - 30
SUFFICIENCY RATING	51	66	34	74	34	24	77	36	47	51	64	62	54	SUFFICIENCY RATING
ADJUSTED RATING	40	58	28	70	29	20	74	32	44	49	62	60	52	ADJUSTED RATING
DEFICIENT MILEAGE	.47	.29	2.66	.68	3.08	2.90	1.51	2.57	2.74	1.86	2.69	4.75	4.51	DEFICIENT MILEAGE

FAP ROUTE NO 24
SHEET 1 OF 2

BEGINNING MILE POST	65.4	72.2	76.1	82.0	86.1	91.2	97.0	100.5	109.0	116.8	127.4	133.2	138.4	BEGINNING MILE POST
LENGTH	6.7	3.8	5.8	4.1	5.0	5.8	3.5	8.5	7.7	10.6	5.7	5.2	1.3	LENGTH
YEAR BUILT	60	60	60	57	57	48	48	51	52	52	59	64	36	YEAR BUILT
YEAR IMPROVED	60	60	60	64	64	70	62	51	52	52	59	64	71	YEAR IMPROVED
SURFACE WIDTH	24	24	24	28	28	24	24	25	24	24	32	32	25	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	30	30	25	25	25	26	26	32	32	31	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	PMS	PMS	BST	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	1343	1401	1128	988	956	956	956	993	1005	1076	1710	1702	1713	ADT
DHV	221	210	169	148	143	143	143	148	150	161	239	238	239	DHV
SERVICE VOLUME	328	450	295	333	104	132	237	217	308	308	643	562	453	SERVICE VOLUME
FOUNDATION - 10	6	6	7	7	7	3	3	0	0	0	8	5	3	FOUNDATION - 10
SURFACE - 30	21	19	21	17	20	16	16	13	15	15	26	23	16	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	8	8	8	8	7	10	10	9	DRAINAGE - 10
SAFETY - 20	4	5	2	5	1	2	4	10	2	2	9	8	2	SAFETY - 20
CAPACITY - 30	20	23	21	23	9	14	21	20	23	22	24	24	22	CAPACITY - 30
SUFFICIENCY RATING	61	67	61	62	47	43	52	51	48	46	77	70	52	SUFFICIENCY RATING
ADJUSTED RATING	58	64	59	61	46	42	51	50	47	45	73	66	47	ADJUSTED RATING
DEFICIENT MILEAGE	2.64	1.27	2.29	1.55	2.69	3.31	1.68	4.17	4.05	5.74	1.31	1.58	.63	DEFICIENT MILEAGE

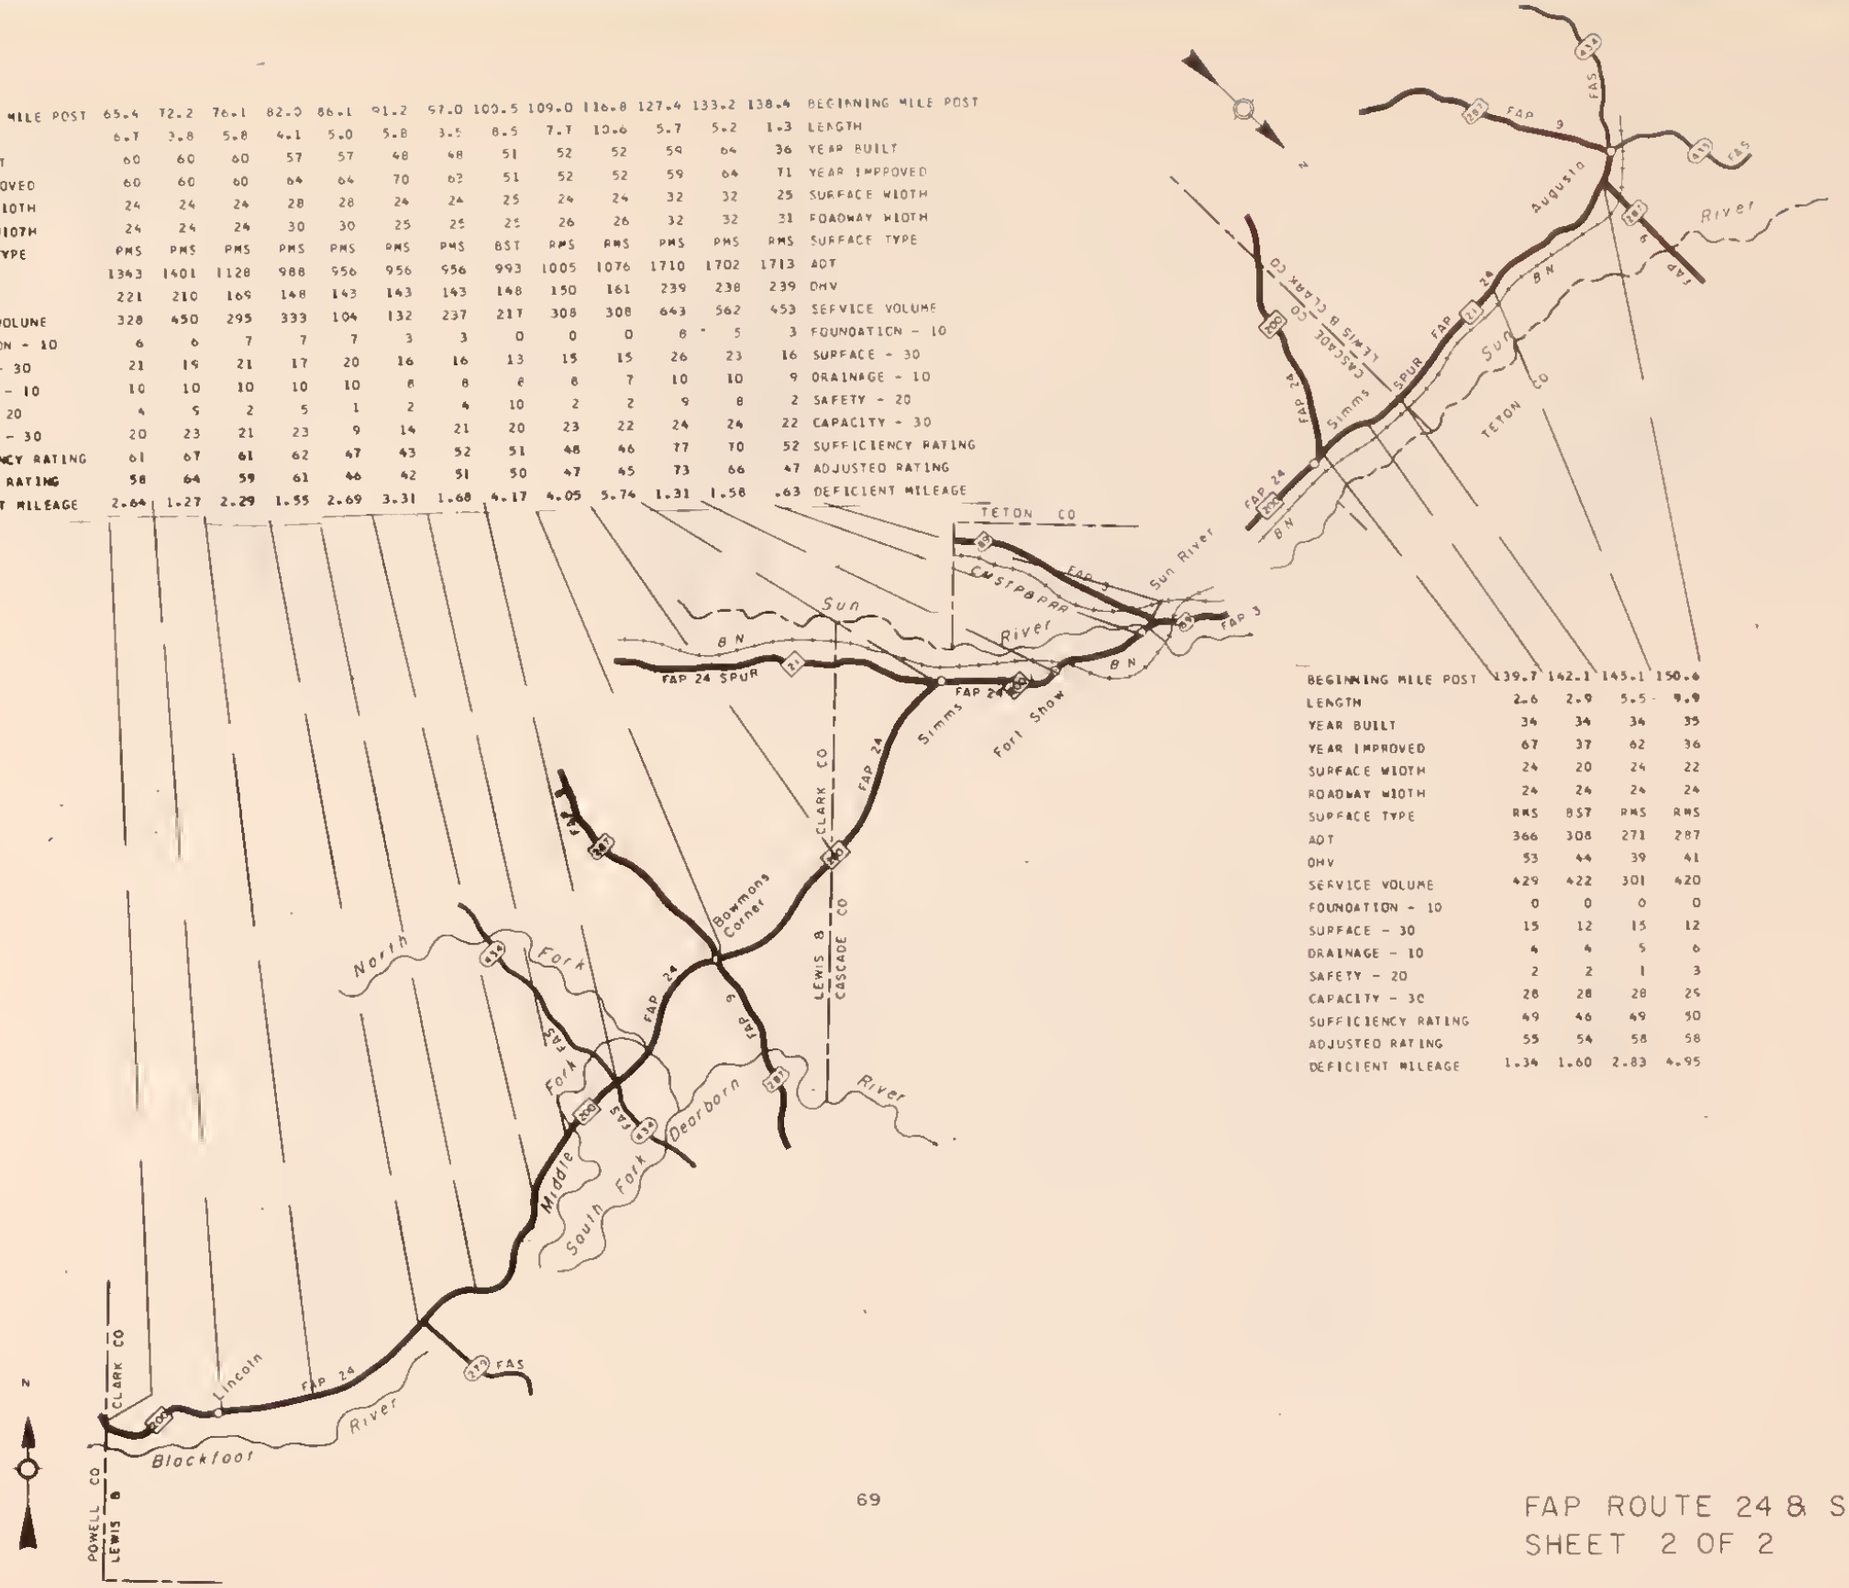

BEGINNING MILE POST	139.7	142.1	145.1	150.6
LENGTH	2.6	2.9	5.5	9.9
YEAR BUILT	34	34	34	35
YEAR IMPROVED	67	37	62	36
SURFACE WIDTH	24	20	24	22
ROADWAY WIDTH	24	24	24	24
SURFACE TYPE	RMS	BST	RMS	RMS
ADT	366	308	271	287
DHV	53	44	39	41
SERVICE VOLUME	429	422	301	420
FOUNDATION - 10	0	0	0	0
SURFACE - 30	15	12	15	12
DRAINAGE - 10	4	4	5	6
SAFETY - 20	2	2	1	3
CAPACITY - 30	28	28	28	25
SUFFICIENCY RATING	49	46	49	50
ADJUSTED RATING	55	54	58	58
DEFICIENT MILEAGE	1.34	1.60	2.83	4.95

FAP ROUTE 24 & SPUR
SHEET 2 OF 2

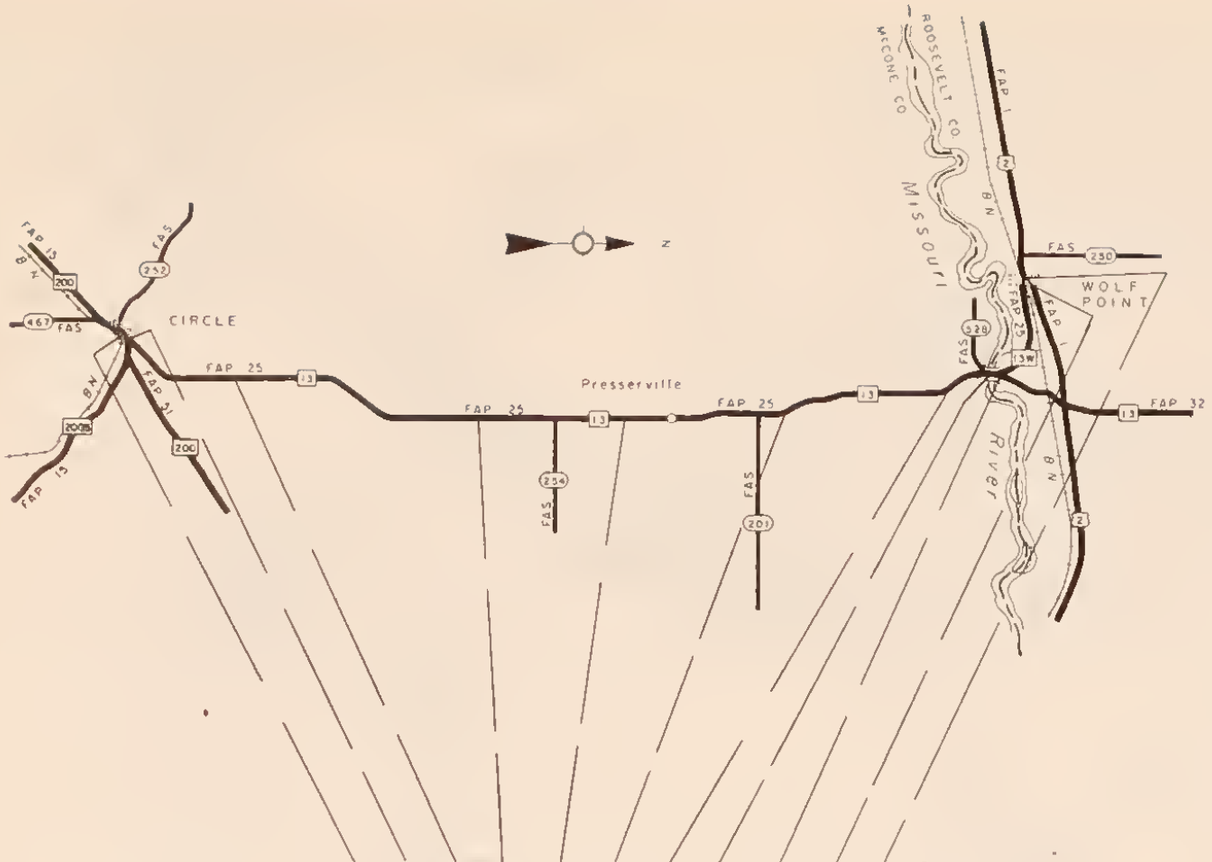

BEGINNING MILE POST	0.0	0.1	7.7	20.9	28.7	35.5	44.7	46.4	46.9	52.3
LENGTH	0.1	7.6	13.1	7.2	7.4	9.2	1.7	0.4	5.4	0.4
YEAR BUILT	U	36	36	35	40	37	30	30	30	U
YEAR IMPROVED	R	56	55	40	40	37	36	56	56	R
SURFACE WIDTH	B	20	20	20	20	20	20	20	24	B
ROADWAY WIDTH	A	24	25	24	24	25	24	24	24	A
SURFACE TYPE	N	RMS	RMS	RMS	RMS	RMS	BST	RMS	RMS	N
ADT		585	567	583	582	612	780	983	1315	
DHV		76	73	75	75	79	707	127	131	
SERVICE VOLUME		315	768	392	357	185	126	220	371	
FOUNDATION - 10		0	0	0	0	0	0	0	0	
SURFACE - 30		8	13	10	10	18	13	12	12	
DRAINAGE - 10		8	6	7	7	6	6	10	7	
SAFETY - 20		1	1	4	3	3	7	2	2	
CAPACITY - 30		26	23	27	27	24	18	21	25	
SUFFICIENCY RATING		43	43	48	47	51	38	45	46	
ADJUSTED RATING		46	46	51	50	54	39	44	45	
DEFICIENT MILEAGE		4.33	7.49	3.74	3.52	4.52	1.08	.22	2.95	

BEGINNING MILE POST
LENGTH
YEAR BUILT
YEAR IMPROVED
SURFACE WIDTH
ROADWAY WIDTH
SURFACE TYPE
ADT
DHV
SERVICE VOLUME
FOUNDATION - 10
SURFACE - 30
DRAINAGE - 10
SAFETY - 20
CAPACITY - 30
SUFFICIENCY RATING
ADJUSTED RATING
DEFICIENT MILEAGE

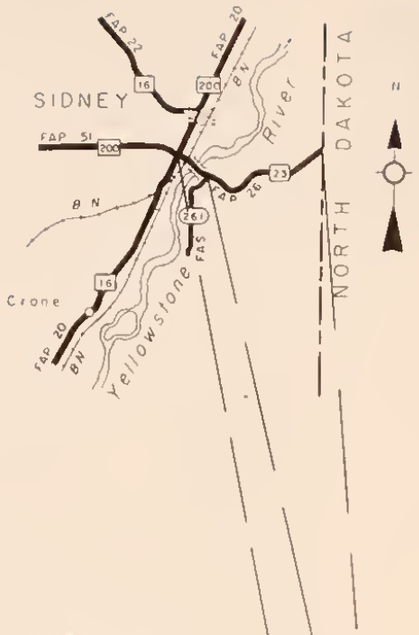

BEGINNING MILE POST	0.0	0.7
LENGTH	0.7	6.7
YEAR BUILT	36	33
YEAR IMPROVED	36	55
SURFACE WIDTH	22	20
ROADWAY WIDTH	25	24
SURFACE TYPE	BST	RMS
ADT	977	361
DHV	127	46
SERVICE VOLUME	448	480
FOUNDATION - 10	0	0
SURFACE - 30	13	8
DRAINAGE - 10	10	5
SAFETY - 20	1	2
CAPACITY - 30	26	29
SUFFICIENCY RATING	50	44
ADJUSTED RATING	49	50
DEFICIENT MILEAGE	.38	3.78

FAP ROUTE NO 25 & 26
SHEET 1 OF 1

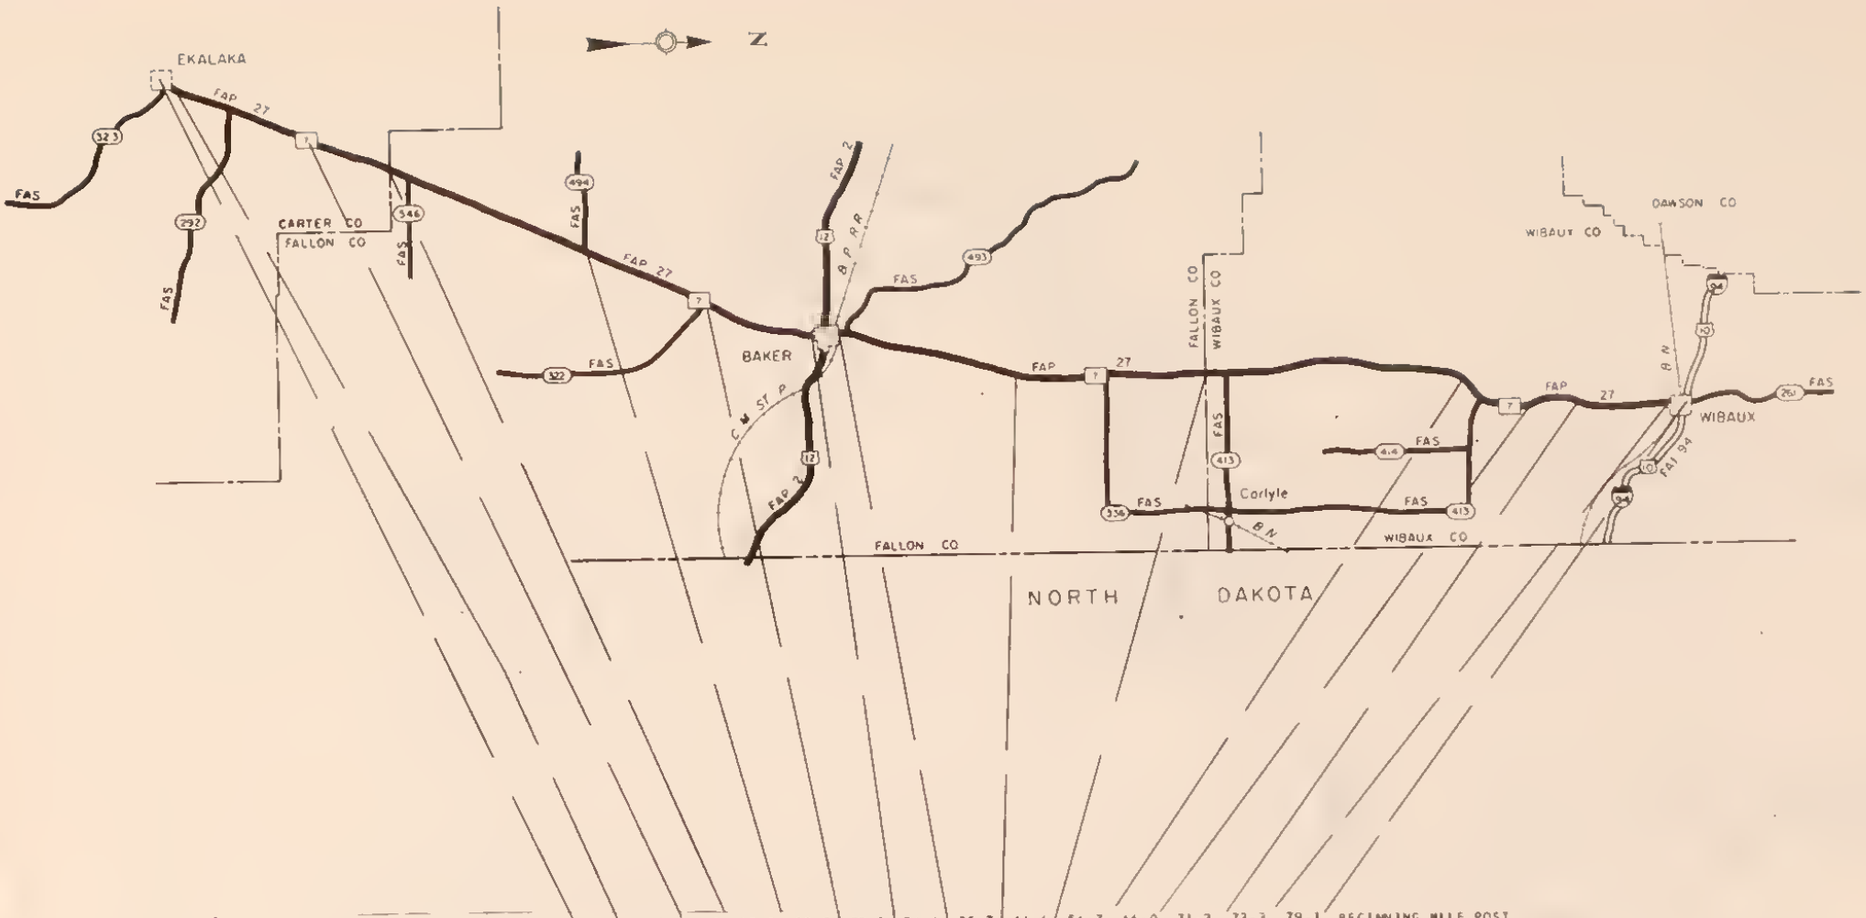

BEGINNING MILE POST	0.0	0.3	7.2	12.0	22.5	29.1	34.6	35.7	44.4	54.7	66.0	71.3	73.3	79.1
LENGTH	0.3	6.9	4.8	10.4	6.6	5.5	1.1	8.6	10.2	11.2	5.3	2.0	5.7	0.9
YEAR BUILT	U	50	50	50	48	48	U	57	58	65	65	65	65	U
YEAR IMPROVED	R	50	50	50	48	48	R	60	58	65	65	65	65	R
SURFACE WIDTH	B	22	22	22	25	25	B	28	30	28	28	28	28	B
ROADWAY WIDTH	A	24	24	24	25	25	A	28	30	28	28	28	28	A
SURFACE TYPE	N	PMS	PMS	PMS	BST	BST	N	PMS	BST	PMS	PMS	PMS	PMS	N
ADT		337	304	342	389	575		581	355	336	420	467	506	
DHV		43	39	44	50	74		75	46	43	54	60	65	
SERVICE VOLUME		431	243	243	286	441		492	333	522	504	312	480	
FOUNDATION - 10		0	0	0	0	0		0	0	8	8	10	8	
SURFACE - 30		11	11	11	12	10		10	12	24	24	27	25	
DRAINAGE - 10		10	10	10	9	9		10	10	10	10	10	10	
SAFETY - 20		4	1	2	2	2		12	9	7	6	3	8	
CAPACITY - 30		29	28	27	27	27		28	28	29	28	27	28	
SUFFICIENCY RATING		54	50	50	50	48		60	59	78	76	77	79	
ADJUSTED RATING		61	58	57	56	51		63	65	83	80	80	81	
DEFICIENT MILEAGE		3.17	2.40	5.22	3.30	2.86		3.45	4.20	2.47	1.27	.47	1.20	

FAP ROUTE 27
SHEET 1 OF 1

BEGINNING MILE POST	0.0
LENGTH	8.7
YEAR BUILT	36
YEAR IMPROVED	72
SURFACE WIDTH	22
ROADWAY WIDTH	22
SURFACE TYPE	BST
ADT	340
DHV	76
SERVICE VOLUME	253
FOUNDATION - 10	4
SURFACE - 30	18
DRAINAGE - 10	6
SAFETY - 20	0
CAPACITY - 30	25
SUFFICIENCY RATING	53
ADJUSTED RATING	60
DEFICIENT MILEAGE	4.09

BEGINNING MILE POST	45.0	47.3	53.7	60.0	64.2	68.3	68.5	68.6	70.3	82.0	90.9	95.3	96.6	101.1
LENGTH	2.3	6.4	6.2	4.2	4.1	0.2	0.1	1.5	11.7	8.9	4.4	1.0	4.6	0.5
YEAR BUILT	65	65	65	69	34	U	34	U	21	36	74	U	74	68
YEAR IMPROVED	65	65	65	65	57	A	57	A	54	36	74	A	74	68
SURFACE WIDTH	28	28	28	34	22	B	22	B	22	21	40	B	44	40
ROADWAY WIDTH	28	28	28	36	22	A	24	A	24	24	40	A	44	40
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	N	PMS	N	PMS	PMS	PMS	N	PMS	PMS
ADT	442	487	552	595	783		1336		1202	1165	1324		1490	1679
DHV	59	109	124	133	176		300		240	233	264		298	335
SERVICE VOLUME	408	394	591	522	591		595		544	486	309		344	209
FOUNDATION - 10	8	7	7	9	0		0		0	0	10		10	7
SURFACE - 30	21	20	21	26	8		10		11	13	30		30	24
DRAINAGE - 10	10	10	10	10	8		8		8	8	10		10	10
SAFETY - 20	1	0	1	20	1		20		5	5	7		3	12
CAPACITY - 30	26	26	27	26	26		22		23	23	17		17	14
SUFFICIENCY RATING	66	63	66	91	43		60		47	45	74		70	67
ADJUSTED RATING	70	67	69	92	44		57		45	47	72		67	63
DEFICIENT MILEAGE	.79	2.37	2.13	.38	2.36		.04		6.20	4.55	1.15		1.40	.19

FAP ROUTE NO 28
SHEET 1 OF 1

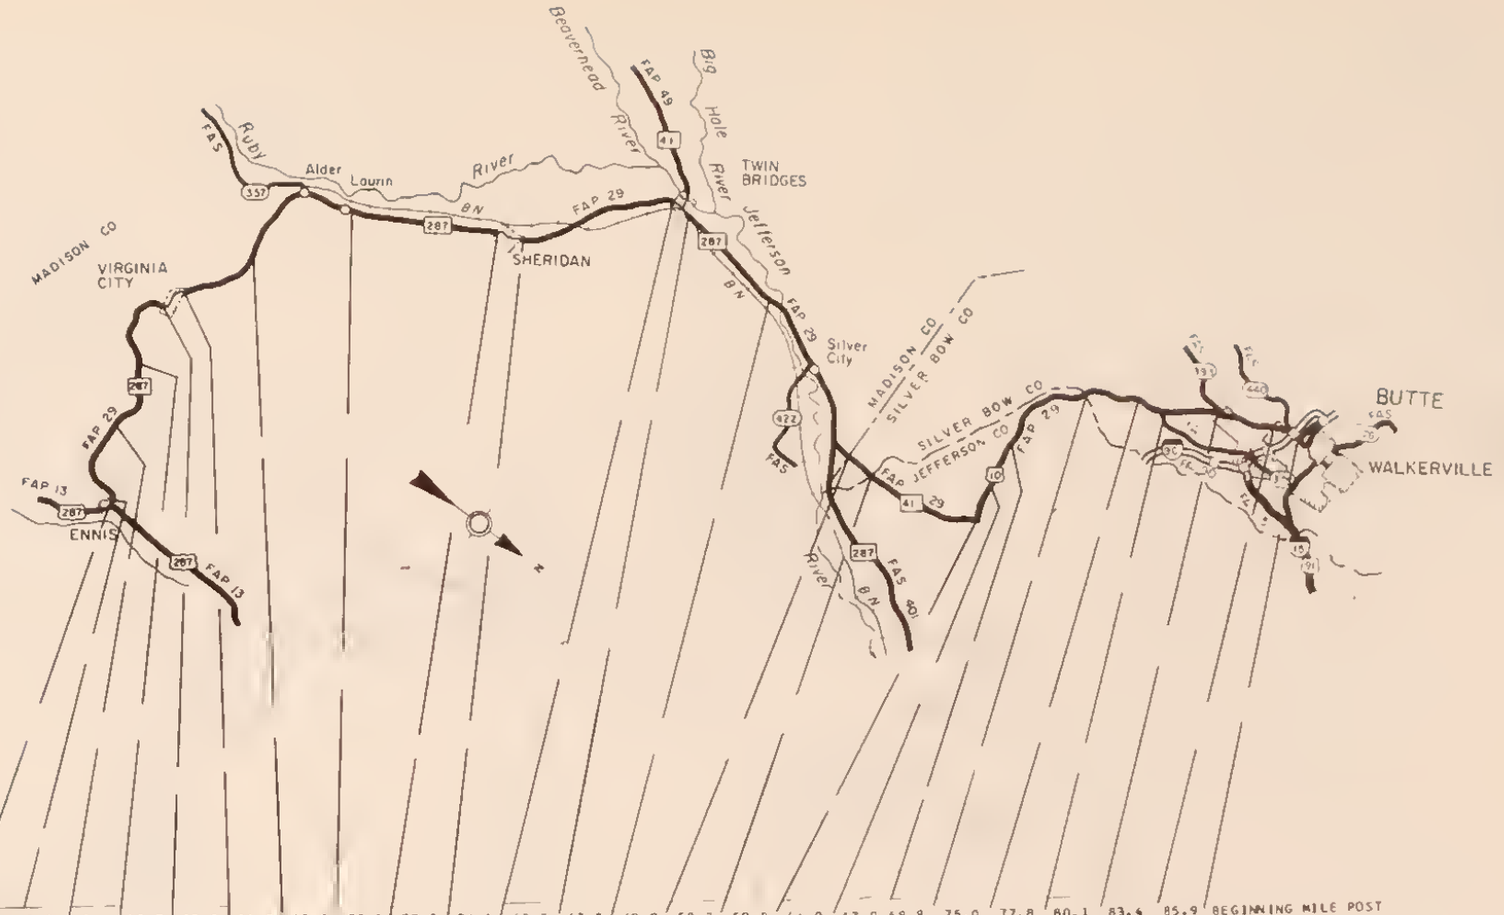

BEGINNING MILE POST	0.0	0.2	5.6	10.7	13.0	14.8	19.9	25.1	33.0	34.1	42.2	43.2	49.9	58.3	59.8	66.0	67.9	68.8	75.0	77.8	80.1	83.4	85.9	BEGINNING MILE POST
LENGTH	0.2	5.4	5.0	2.3	1.7	5.1	5.2	7.9	1.1	8.0	1.0	6.6	8.5	1.4	5.7	2.0	0.8	6.1	2.8	2.3	3.2	2.5	2.2	LENGTH
YEAR BUILT	U	50	51	56	U	45	42	40	U	39	U	39	36	36	36	21	51	31	34	28	28	N	U	YEAR BUILT
YEAR IMPROVED	R	50	51	56	R	45	42	40	R	39	R	39	36	62	36	40	51	62	62	60	71	C	R	YEAR IMPROVED
SURFACE WIDTH	B	24	28	28	B	20	20	20	B	20	B	20	18	22	18	24	34	22	24	24	24	N	B	SURFACE WIDTH
ROADWAY WIDTH	A	24	32	28	A	24	24	24	A	24	A	24	24	24	24	31	34	26	30	30	30	E	A	ROADWAY WIDTH
SURFACE TYPE	N	RMS	RMS	PMS	N	RMS	RMS	RMS	N	PMS	N	RMS	PMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	X	N	SURFACE TYPE
ADT		681	577	565		857	772	711		1010		1119	919	301	303	388	395	416	543	736	1208	1		ADT
DHV		143	121	119		179	162	149		212		167	137	45	45	50	51	54	70	95	157	S		DHV
SERVICE VOLUME		420	243	194		315	390	435		486		420	403	540	502	248	243	296	302	627	331	7		SERVICE VOLUME
FOUNDATION - 10		5	5	5		4	0	0		0		0	0	0	0	0	0	0	0	0	0	E		FOUNDATION - 10
SURFACE - 30		18	17	18		18	13	12		11		13	10	10	10	13	13	10	14	14	11	N		SURFACE - 30
DRAINAGE - 10		7	8	10		5	8	8		8		5	6	5	5	10	10	7	7	7	8	T		DRAINAGE - 10
SAFETY - 20		2	6	20		3	4	8		6		19	1	1	1	2	9	3	0	2	1			SAFETY - 20
CAPACITY - 30		25	23	21		21	24	25		23		24	25	29	25	27	27	27	27	28	23			CAPACITY - 30
SUFFICIENCY RATING		57	59	74		51	49	53		48		61	42	45	45	52	59	47	48	51	43			SUFFICIENCY RATING
ADJUSTED RATING		59	62	76		51	50	55		47		59	42	53	53	58	65	52	51	52	41			ADJUSTED RATING
DEFICIENT MILEAGE		2.33	2.06	.60		2.50	2.67	3.72		4.17		2.58	4.93	.81	3.18	.96	.36	3.26	1.46	1.14	1.86			DEFICIENT MILEAGE

FAP ROUTE NO 29
SHEET 1 OF 1

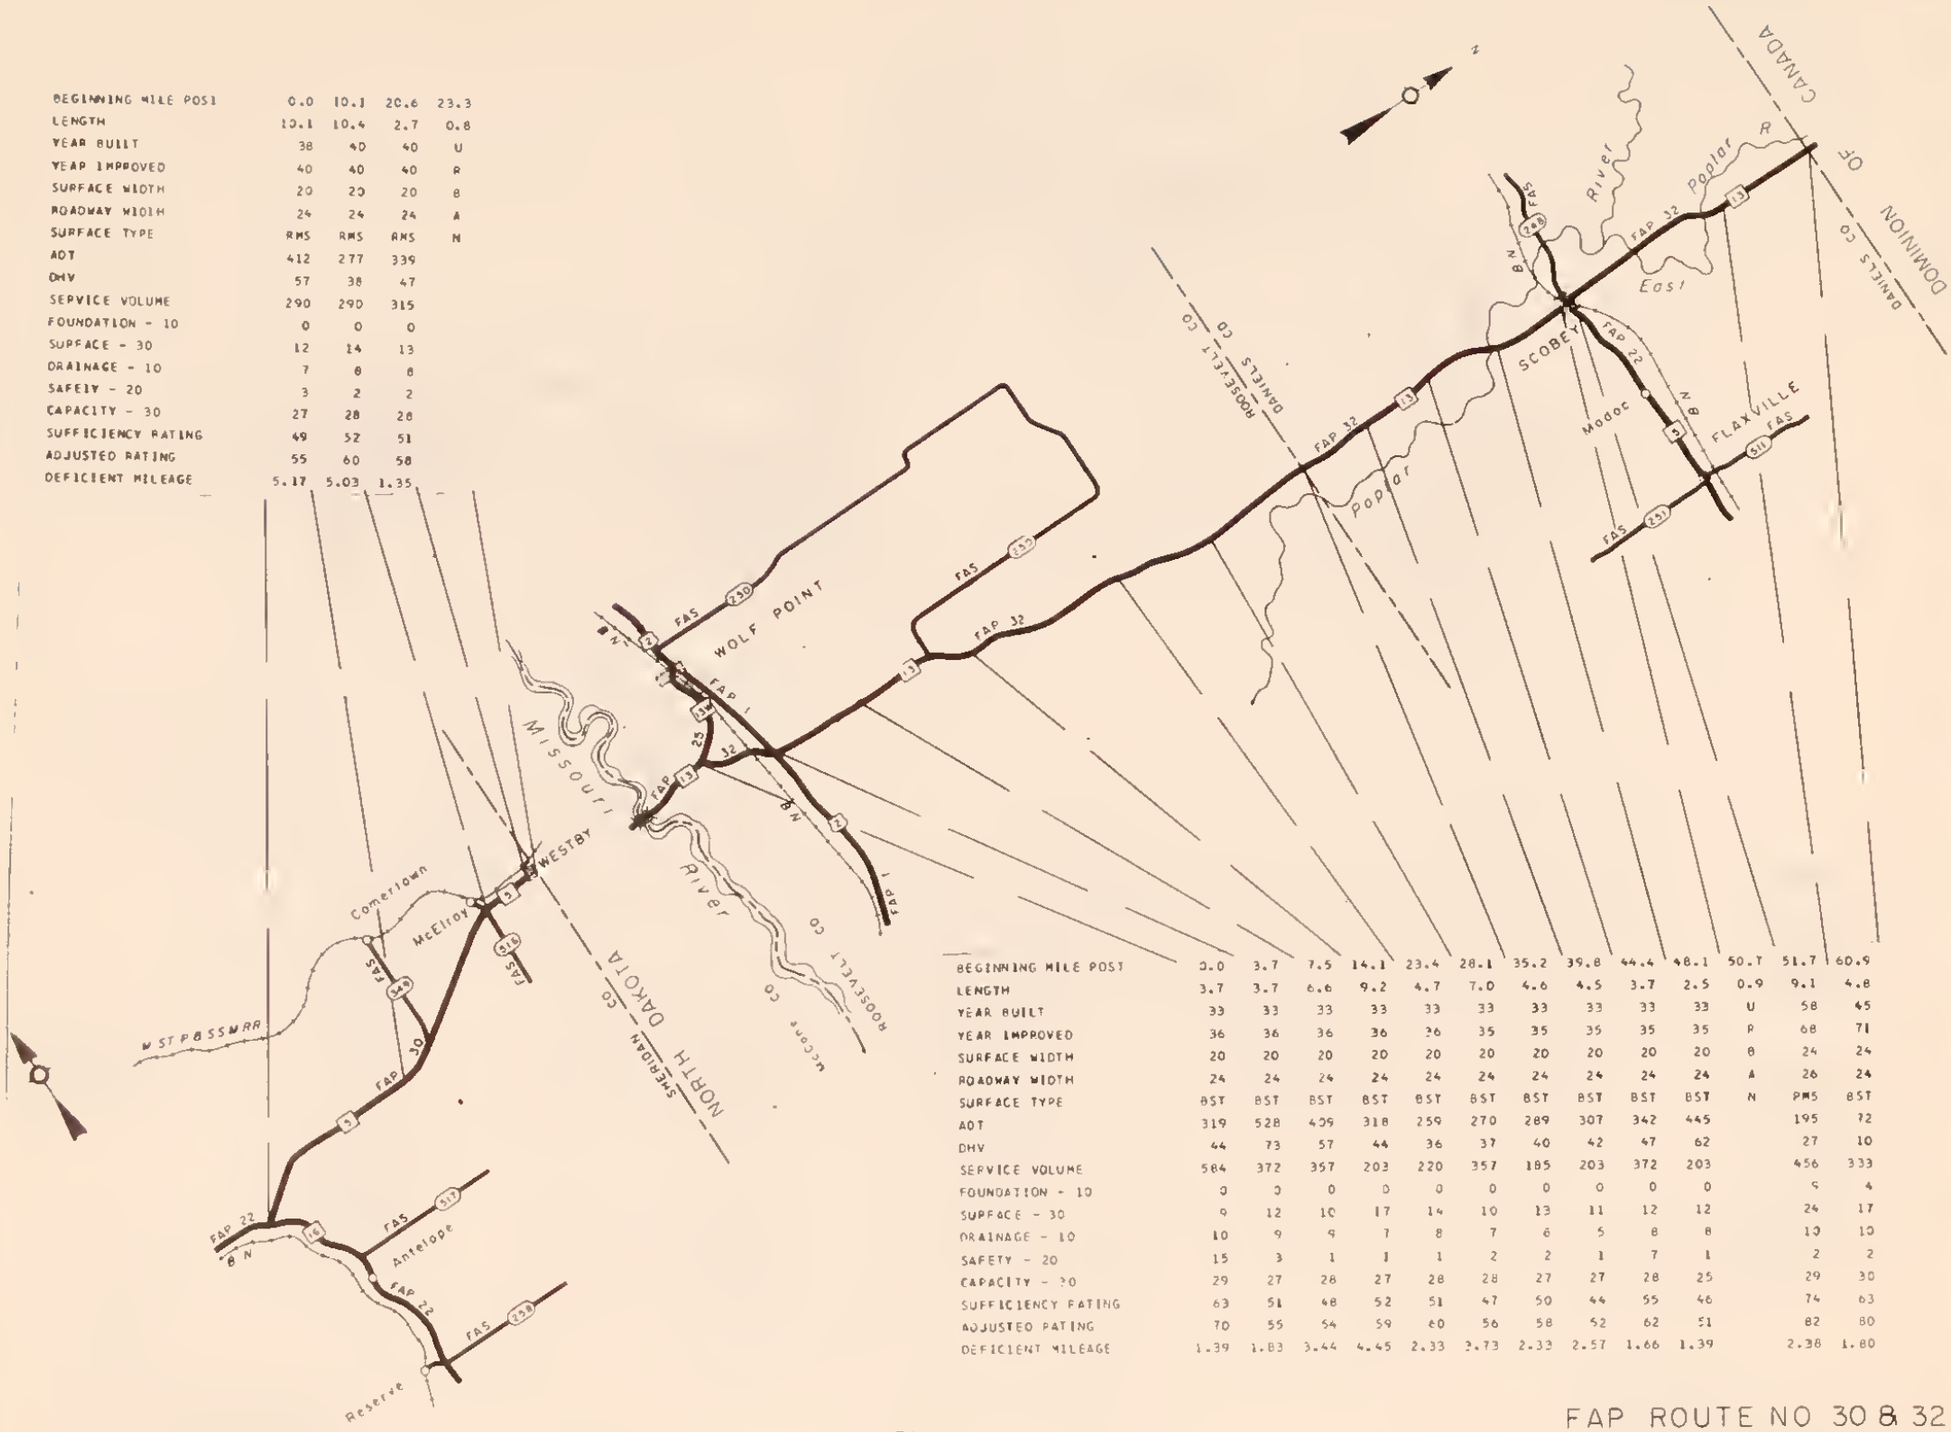

BEGINNING MILE POST	0.0	10.1	20.6	23.3
LENGTH	10.1	10.4	2.7	0.8
YEAR BUILT	38	40	40	U
YEAR IMPROVED	40	40	40	R
SURFACE WIDTH	20	20	20	B
ROADWAY WIDTH	24	24	24	A
SURFACE TYPE	RMS	RMS	RMS	N
ADT	412	277	339	
DHV	57	38	47	
SERVICE VOLUME	290	290	315	
FOUNDATION - 10	0	0	0	
SURFACE - 30	12	14	13	
DRAINAGE - 10	7	8	8	
SAFETY - 20	3	2	2	
CAPACITY - 30	27	28	28	
SUFFICIENCY RATING	49	52	51	
ADJUSTED RATING	55	60	58	
DEFICIENT MILEAGE	5.17	5.03	1.35	

BEGINNING MILE POST	0.0	3.7	7.5	14.1	23.4	28.1	35.2	39.8	44.4	48.1	50.7	51.7	60.9
LENGTH	3.7	3.7	6.6	9.2	4.7	7.0	4.6	4.5	3.7	2.5	0.9	9.1	4.8
YEAR BUILT	33	33	33	33	33	33	33	33	33	33	U	58	45
YEAR IMPROVED	36	36	36	36	36	35	35	35	35	35	R	68	71
SURFACE WIDTH	20	20	20	20	20	20	20	20	20	20	B	24	24
ROADWAY WIDTH	24	24	24	24	24	24	24	24	24	24	A	26	24
SURFACE TYPE	BST	BST	BST	BST	BST	BST	BST	BST	BST	BST	N	PMS	BST
ADT	319	528	409	318	259	270	289	307	342	445		195	72
DHV	44	73	57	44	36	37	40	42	47	62		27	10
SERVICE VOLUME	584	372	357	203	220	357	185	203	372	203		456	333
FOUNDATION - 10	0	0	0	0	0	0	0	0	0	0		9	4
SURFACE - 30	9	12	10	17	14	10	13	11	12	12		24	17
DRAINAGE - 10	10	9	9	7	8	7	6	5	8	8		10	10
SAFETY - 20	15	3	1	1	1	2	2	1	7	1		2	2
CAPACITY - 30	29	27	28	27	28	28	27	27	28	25		29	30
SUFFICIENCY RATING	63	51	48	52	51	47	50	44	55	46		74	63
ADJUSTED RATING	70	55	54	59	60	56	58	52	62	51		82	80
DEFICIENT MILEAGE	1.39	1.83	3.44	4.45	2.33	2.73	2.33	2.57	1.66	1.39		2.38	1.80

FAP ROUTE NO 30 & 32
SHEET 1 OF 1

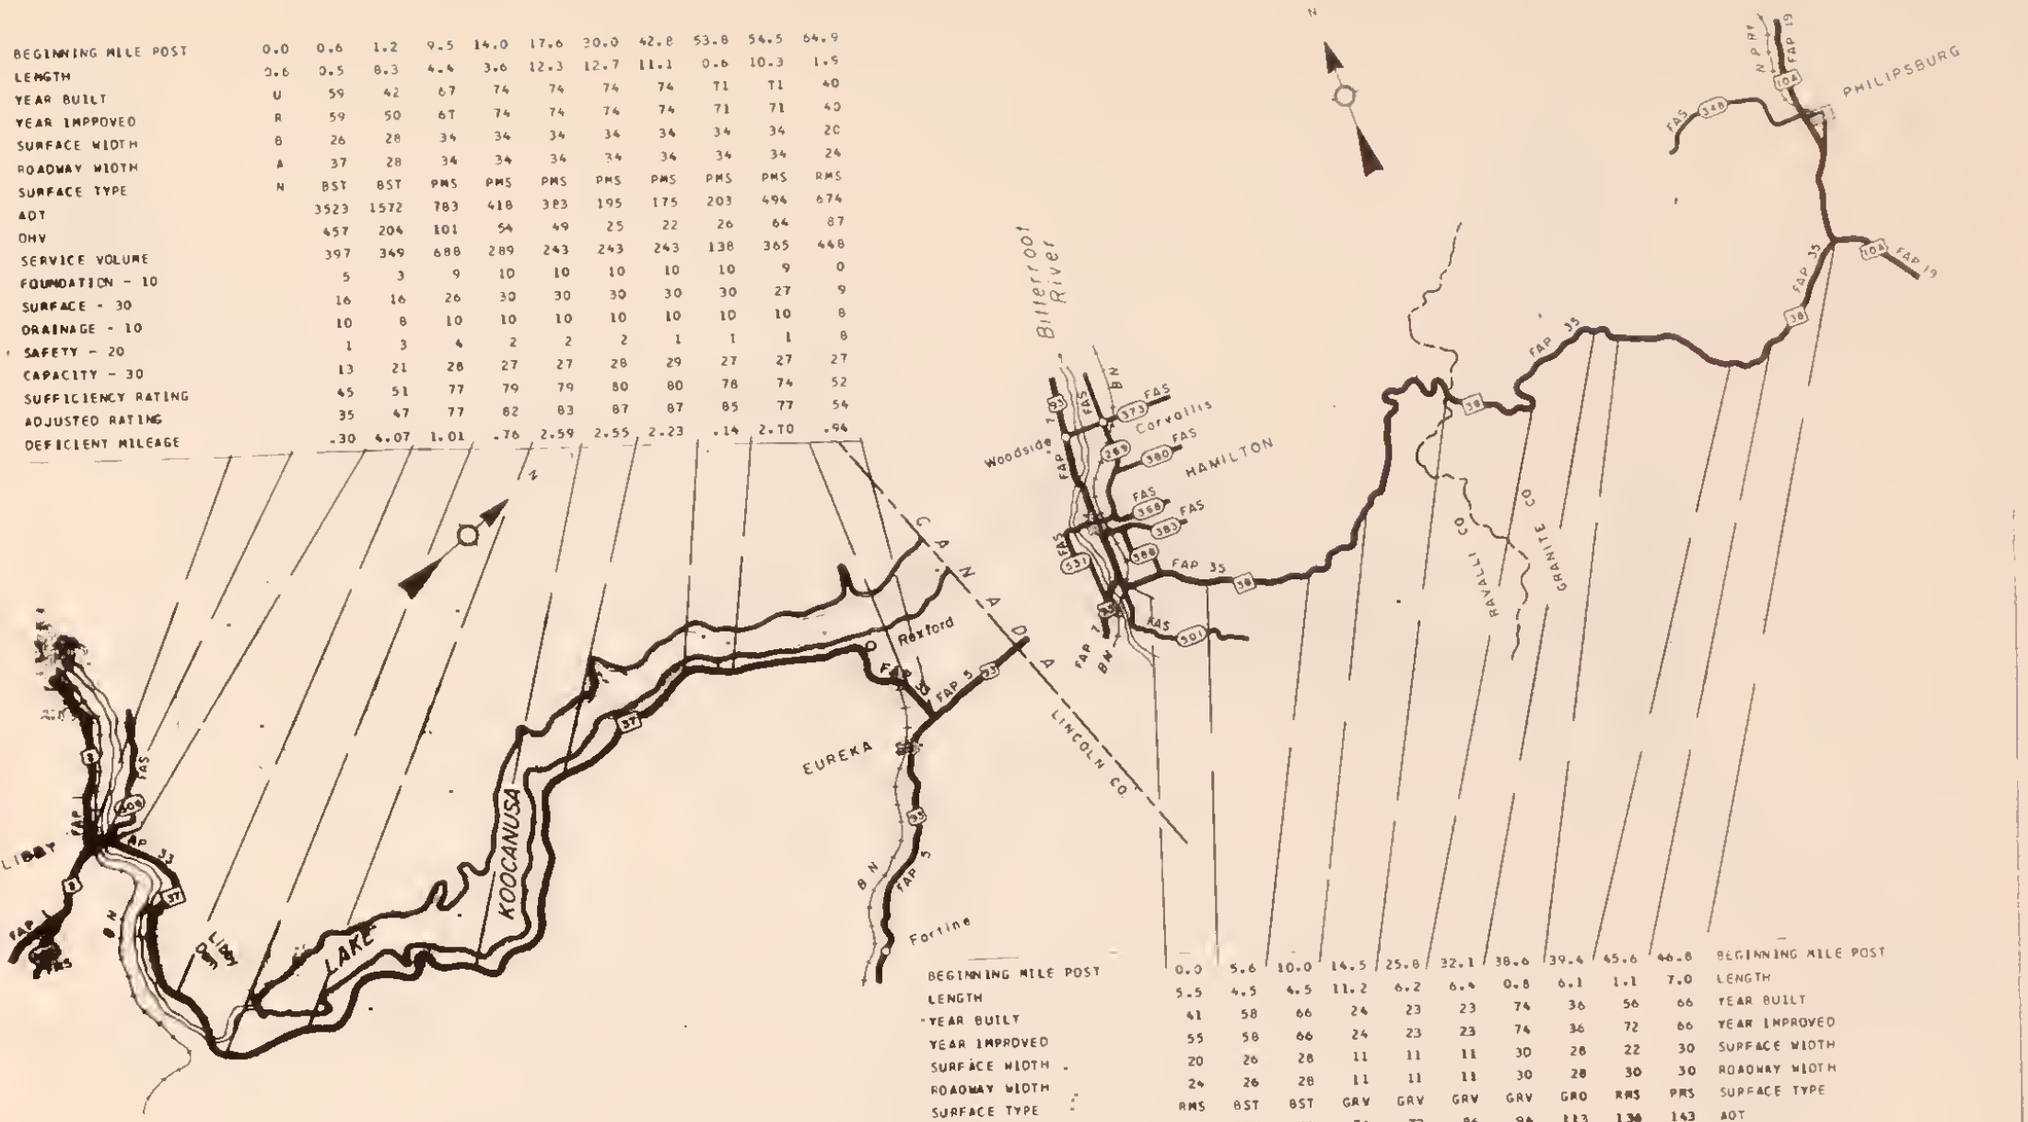

BEGINNING MILE POST	0.0	0.6	1.2	9.5	14.0	17.6	30.0	42.8	53.8	54.5	64.9
LENGTH	0.6	0.5	8.3	4.4	3.6	12.3	12.7	11.1	0.6	10.3	1.5
YEAR BUILT	U	59	42	67	74	74	74	74	71	71	40
YEAR IMPROVED	R	59	50	67	74	74	74	74	71	71	40
SURFACE WIDTH	B	26	28	34	34	34	34	34	34	34	20
ROADWAY WIDTH	A	37	28	34	34	34	34	34	34	34	24
SURFACE TYPE	N	BST	BST	PMS	PMS	PMS	PMS	PMS	PMS	PMS	RMS
ADT		3523	1572	783	418	383	195	175	203	494	674
DHV		457	204	101	54	49	25	22	26	64	87
SERVICE VOLUME		397	349	688	289	243	243	243	138	365	448
FOUNDATION - 10		5	3	9	10	10	10	10	10	9	0
SURFACE - 30		16	16	26	30	30	30	30	30	27	9
DRAINAGE - 10		10	8	10	10	10	10	10	10	10	8
SAFETY - 20		1	3	4	2	2	2	1	1	1	8
CAPACITY - 30		13	21	28	27	27	28	29	27	27	27
SUFFICIENCY RATING		45	51	77	79	79	80	80	78	74	52
ADJUSTED RATING		35	47	77	82	83	87	87	85	77	54
DEFICIENT MILEAGE		.30	4.07	1.01	.76	2.59	2.55	2.23	.14	2.70	.94

BEGINNING MILE POST	0.0	5.6	10.0	14.5	25.8	32.1	38.6	39.4	45.6	46.8	BEGINNING MILE POST
LENGTH	5.5	4.5	4.5	11.2	6.2	6.4	0.8	6.1	1.1	7.0	LENGTH
YEAR BUILT	41	58	66	24	23	23	74	36	56	66	YEAR BUILT
YEAR IMPROVED	55	58	66	24	23	23	74	36	72	66	YEAR IMPROVED
SURFACE WIDTH	20	26	28	11	11	11	30	28	22	30	SURFACE WIDTH
ROADWAY WIDTH	24	26	28	11	11	11	30	28	30	30	ROADWAY WIDTH
SURFACE TYPE	RMS	BST	BST	GRV	GRV	GRV	GRV	GRO	RMS	PMS	SURFACE TYPE
ADT	349	109	91	76	72	86	94	113	136	143	ADT
DHV	48	15	13	12	11	13	15	18	21	22	DHV
SERVICE VOLUME	463	235	255	113	113	113	878	462	537	410	SERVICE VOLUME
FOUNDATION - 10	0	0	5	0	0	0	0	0	0	10	FOUNDATION - 10
SURFACE - 30	10	13	15	0	0	0	0	0	10	27	SURFACE - 30
DRAINAGE - 10	6	9	10	3	3	3	10	6	10	10	DRAINAGE - 10
SAFETY - 20	4	1	1	0	0	0	20	3	20	9	SAFETY - 20
CAPACITY - 30	28	29	29	28	29	28	30	29	29	29	CAPACITY - 30
SUFFICIENCY RATING	48	52	64	31	22	31	60	38	69	85	SUFFICIENCY RATING
ADJUSTED RATING	55	67	79	46	48	45	76	52	81	92	ADJUSTED RATING
DEFICIENT MILEAGE	2.89	2.17	1.63	7.75	4.27	4.46	.33	3.60	.37	1.05	DEFICIENT MILEAGE

FAP ROUTE NO 33 & 35
SHEET 1 OF 1

46.7	47.7	BEGINNING MILE POST
1.7	0.2	LENGTH
41	U	YEAR BUILT
41	R	YEAR IMPROVED
20	S	SURFACE WIDTH
26	A	ROADWAY WIDTH
BST	N	SURFACE TYPE
842		ADT
126		DHV
685		SERVICE VOLUME
0		FOUNDATION - 10
9		SURFACE - 30
6		DRAINAGE - 10
9		SAFETY - 20
27		CAPACITY - 30
51		SUFFICIENCY RATING
51		ADJUSTED RATING
.85		DEFICIENT MILEAGE

BEGINNING MILE POST	0.0	3.6	7.4	13.8	16.2	18.9	26.1	31.1	31.6	36.1	40.1	BEGINNING MILE POST
LENGTH	3.6	3.8	6.4	2.3	2.7	7.1	4.9	0.5	4.4	4.1	6.5	LENGTH
YEAR BUILT	44	41	34	41	63	63	40	40	40	37	37	YEAR BUILT
YEAR IMPROVED	47	47	47	41	63	63	40	40	51	61	65	YEAR IMPROVED
SURFACE WIDTH	20	20	20	20	28	28	20	20	20	24	24	SURFACE WIDTH
ROADWAY WIDTH	28	25	24	26	28	28	25	25	26	26	26	ROADWAY WIDTH
SURFACE TYPE	BST	BST	BST	BST	PMS	PMS	BST	BST	RMS	RMS	RMS	SURFACE TYPE
ADT	528	450	403	446	652	640	457	476	461	433	457	ADT
DHV	79	67	60	66	97	96	68	71	69	64	68	DHV
SERVICE VOLUME	283	206	288	138	599	586	266	266	278	825	318	SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	5	6	0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	9	10	10	12	20	18	11	13	13	10	13	SURFACE - 30
DRAINAGE - 10	7	6	6	6	10	10	7	7	6	7	7	DRAINAGE - 10
SAFETY - 20	3	3	2	6	9	8	6	10	4	20	8	SAFETY - 20
CAPACITY - 30	26	25	27	23	28	28	26	26	26	29	27	CAPACITY - 30
SUFFICIENCY RATING	45	44	45	47	72	70	50	56	49	66	55	SUFFICIENCY RATING
ADJUSTED RATING	49	49	51	52	74	72	55	60	54	71	60	ADJUSTED RATING
DEFICIENT MILEAGE	2.01	2.12	3.52	1.26	.76	2.14	2.49	.22	2.26	1.35	2.53	DEFICIENT MILEAGE

FAP ROUTE 36 & SPUR
SHEET 1 OF 1

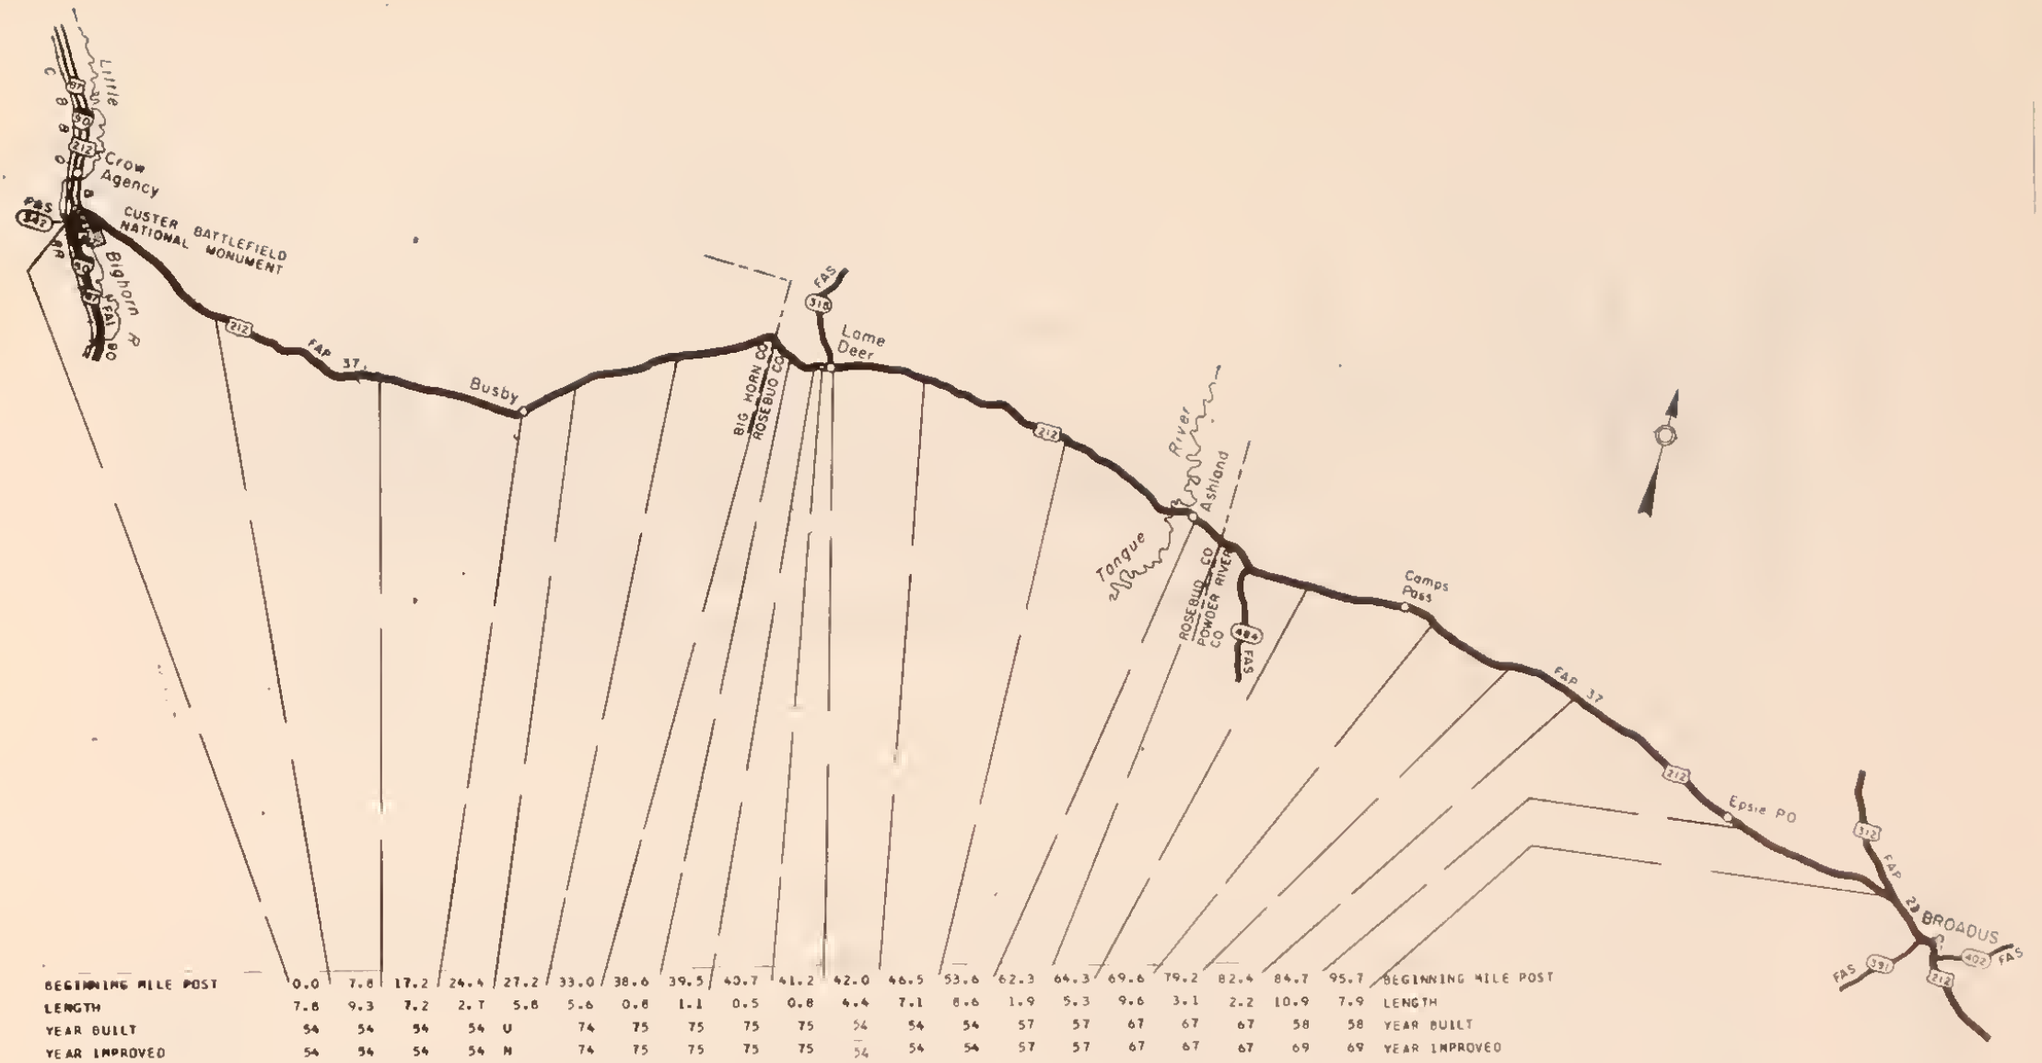

BEGINNING MILE POST	0.0	7.8	17.2	24.4	27.2	33.0	38.6	39.5	40.7	41.2	42.0	46.5	53.6	62.3	64.3	69.6	79.2	82.4	84.7	95.7	BEGINNING MILE POST
LENGTH	7.8	9.3	7.2	2.T	5.8	5.6	0.8	1.1	0.5	0.8	4.4	7.1	8.6	1.9	5.3	9.6	3.1	2.2	10.9	7.9	LENGTH
YEAR BUILT	54	54	54	54	U	74	75	75	75	75	54	54	54	57	57	67	67	67	58	58	YEAR BUILT
YEAR IMPROVED	54	54	54	54	N	74	75	75	75	75	54	54	54	57	57	67	67	67	69	69	YEAR IMPROVED
SURFACE WIDTH	24	24	24	24	D C	40	40	48	56	48	24	24	24	28	24	28	28	28	28	28	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	24	E D	40	40	48	56	48	24	24	24	28	28	28	28	28	28	28	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	R N	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT	810	776	806	948	S	1140	1207	1252	1289	1314	1144	943	894	759	639	485	471	476	492	512	ADT
DHV	109	104	108	127	T	153	162	169	174	177	154	127	120	102	86	65	63	64	66	69	DHV
SERVICE VOLUME	217	418	196	593	R	135	150	272	1368	272	237	120	258	435	289	435	252	289	480	368	SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	U	10	10	10	10	10	0	3	5	4	0	6	5	4	7	9	FOUNDATION - 10
SURFACE - 30	11	10	12	10	C	25	30	30	30	30	14	16	16	16	15	19	17	15	23	28	SURFACE - 30
DRAINAGE - 10	8	8	8	10	T	10	10	10	10	10	9	8	9	10	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	5	7	12	T	1	12	4	11	20	17	20	2	3	2	11	10	13	15	13	5	SAFETY - 20
CAPACITY - 30	22	26	22	2T	0	13	14	21	28	20	20	14	23	26	26	28	26	27	28	27	CAPACITY - 30
SUFFICIENCY RATING	46	51	54	54	N	70	68	82	98	87	63	43	58	58	62	73	71	71	81	79	SUFFICIENCY RATING
ADJUSTED RATING	47	52	55	53		68	66	80	97	85	61	42	58	59	64	76	75	75	83	81	ADJUSTED RATING
DEFICIENT MILEAGE	4.24	4.57	3.35	1.24		1.68	.27	.20	.01	.11	1.65	4.05	3.65	.82	2.01	2.60	.92	.65	2.08	1.66	DEFICIENT MILEAGE

FAP ROUTE NO 37
SHEET 1 OF 1

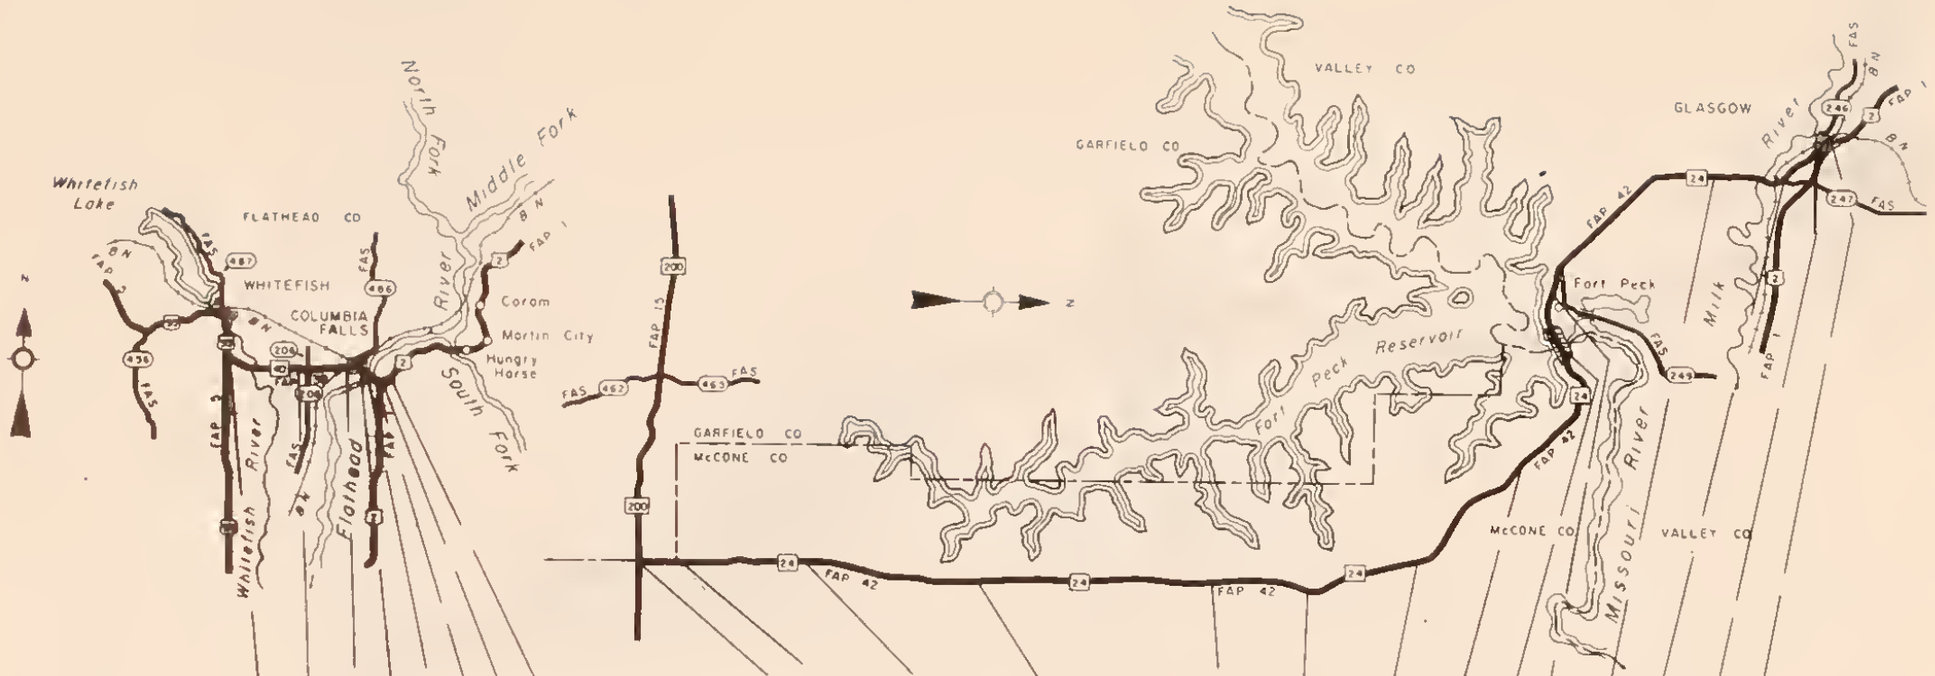

BEGINNING MILE POST	0.0	4.1	6.4	7.3	7.7	8.0	8.6
LENGTH	4.1	2.2	0.9	0.3	0.3	0.5	0.2
YEAR BUILT	75	39	U	37	U	37	71
YEAR IMPROVED	75	53	R	55	N	55	71
SURFACE WIDTH	44	24	B	22	O C	22	44
ROADWAY WIDTH	44	24	A	24	E O	24	44
SURFACE TYPE	PMS	RMS	N	RMS	R N	RMS	RMS
ADT	2268	4729		3260	S	3260	3260
DHV	315	662		456	T	456	456
SERVICE VOLUME	191	759		243	P	280	326
FOUNDATION - 10	10	0		0	U	0	8
SURFACE - 30	30	9		11	C	11	21
DRAINAGE - 10	10	8		7	T	6	10
SAFETY - 20	3	2		7	I	6	0
CAPACITY - 30	5	17		2	O	6	9
SUFFICIENCY RATING	58	36		27	*	29	48
ADJUSTED RATING	51	25		19		21	38
DEFICIENT MILEAGE	1.74	1.45		.27		.40	.12

BEGINNING MILE POST	0.0	1.9	8.2	19.7	31.7	37.2	46.0	52.2	56.2	59.1	70.5	73.2	75.4	BEGINNING MILE POST
LENGTH	1.9	6.3	11.4	12.0	5.4	8.7	6.1	4.0	2.8	11.3	2.7	2.1	0.7	LENGTH
YEAR BUILT	60	60	63	62	56	57	57	36	36	34	34	34	U	YEAR BUILT
YEAR IMPROVED	64	64	64	71	64	64	64	66	66	34	34	58	R	YEAR IMPROVED
SURFACE WIDTH	24	24	24	30	24	24	24	28	30	22	22	22	B	SURFACE WIDTH
ROADWAY WIDTH	40	40	42	30	34	32	32	28	36	26	26	26	A	ROADWAY WIDTH
SURFACE TYPE	BST	BST	BST	PMS	BST	BST	BST	RMS	RMS	RMS	RMS	RMS	N	SURFACE TYPE
ADT	124	122	118	118	118	125	148	166	245	635	826	1302		ADT
DHV	19	19	18	18	18	20	23	26	39	101	132	208		DHV
SERVICE VOLUME	902	571	627	388	380	627	571	395	592	324	442	367		SERVICE VOLUME
FOUNDATION - 10	0	0	0	5	0	0	0	6	9	0	0	0		FOUNDATION - 10
SURFACE - 30	8	8	8	25	14	10	8	25	27	12	11	13		SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	10	10	10	10	7	9	9		DRAINAGE - 10
SAFETY - 20	20	20	15	10	7	20	5	4	8	1	2	2		SAFETY - 20
CAPACITY - 30	30	30	30	29	29	30	29	29	29	25	26	21		CAPACITY - 30
SUFFICIENCY RATING	68	68	63	75	60	70	52	74	83	45	48	45		SUFFICIENCY RATING
ADJUSTED RATING	80	80	77	89	74	82	65	83	88	47	48	42		ADJUSTED RATING
DEFICIENT MILEAGE	.63	2.01	4.22	2.53	2.18	2.63	2.96	1.05	.49	6.23	1.41	1.19		DEFICIENT MILEAGE

FAP ROUTE NO 38 & 42
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.6	1.7	9.4	14.8	25.2	29.0	35.2	BEGINNING MILE POST
LENGTH	0.6	1.1	7.7	5.3	10.4	3.7	6.2	7.5	LENGTH
YEAR BUILT	U	21	50	50	63	63	63	62	YEAR BUILT
YEAR IMPROVED	R	21	50	50	63	63	63	62	YEAR IMPROVED
SURFACE WIDTH	8	18	24	24	28	28	28	30	SURFACE WIDTH
ROADWAY WIDTH	A	24	28	28	30	30	30	30	ROADWAY WIDTH
SURFACE TYPE	N	PCC	RMS	RMS	PMS	PMS	PMS	PMS	SURFACE TYPE
ADT		2504	1224	763	305	275	323	287	ADT
DHV		325	159	99	39	35	41	37	DHV
SERVICE VOLUME		319	318	318	414	442	600	600	SERVICE VOLUME
FOUNDATION - 10		0	0	2	3	5	5	3	FOUNDATION - 10
SURFACE - 30		13	14	14	14	18	18	16	SURFACE - 30
DRAINAGE - 10		7	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20		11	2	8	8	20	4	5	SAFETY - 20
CAPACITY - 30		15	23	25	29	29	29	25	CAPACITY - 30
SUFFICIENCY RATING		46	49	59	64	82	66	62	SUFFICIENCY RATING
ADJUSTED RATING		38	47	60	71	87	73	71	ADJUSTED RATING
DEFICIENT MILEAGE		.61	3.93	2.18	3.76	.67	2.11	2.79	DEFICIENT MILEAGE

FAP ROUTE NO 43
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.5	2.7	7.3	8.0	15.7	22.7	23.8	28.2	33.3	37.8	43.8	43.9	45.3	49.0	58.5	62.8	63.4	64.2	67.2	67.8	69.8	70.4	71.6	78.4	80.4	81.3	BEGINNING MILE POST
LENGTH	0.5	2.2	4.5	0.6	7.7	7.0	1.0	4.4	5.0	4.5	5.9	0.1	1.3	3.7	9.4	4.2	0.6	0.7	3.0	0.6	1.9	0.5	1.2	6.8	2.0	0.8	3.2	LENGTH
YEAR BUILT	U	34	35	69	42	48	69	46	46	35	70	U	C	49	49	49	U	49	47	47	47	47	47	41	41	46	46	YEAR BUILT
YEAR IMPROVED	R	56	55	69	42	48	69	46	46	39	70	R	O	54	54	54	R	54	73	73	73	62	57	70	70	59	60	YEAR IMPROVED
SURFACE WIDTH	B	22	20	30	20	24	30	24	25	20	32	B	I	24	24	24	B	24	24	24	24	24	24	24	24	24	24	SURFACE WIDTH
ROADWAY WIDTH	A	24	24	30	24	31	30	26	26	24	32	A	N	24	24	24	A	24	24	24	24	24	24	24	24	24	24	ROADWAY WIDTH
SURFACE TYPE	N	RMS	RMS	RMS	RMS	BST	RMS	BST	BST	RMS	PMS	N	C	PMS	PMS	PMS	N	PMS	PMS	PMS	PMS	RMS	RMS	PMS	PMS	RMS	RMS	SURFACE TYPE
ADT		964	518	477	453	346	261	234	230	332	475		I	963	766	826		878	879	870	860	887	935	872	810	810	951	ADT
DHV		125	67	62	58	44	33	30	29	43	61		D	125	99	107		114	114	113	111	115	121	113	105	105	123	DHV
SERVICE VOLUME		451	422	549	448	414	329	561	398	431	672		E	492	469	538		289	442	518	494	414	266	349	414	518	312	SERVICE VOLUME
FOUNDATION - 10		0	0	9	0	0	10	0	0	0	9		N	0	0	0		5	3	3	2	3	2	7	6	0	4	FOUNDATION - 10
SURFACE - 30		10	9	26	9	11	26	9	13	12	24		T	10	14	10		16	15	14	13	13	12	23	18	12	14	SURFACE - 30
DRAINAGE - 10		5	4	10	4	9	10	9	10	7	10			9	10	10		10	10	10	10	10	9	10	10	8	9	DRAINAGE - 10
SAFETY - 20		3	1	20	1	1	20	3	3	2	17			2	6	2		1	3	20	19	1	20	2	10	18	2	SAFETY - 20
CAPACITY - 30		26	28	28	28	28	28	29	29	29	29			26	27	27		24	26	27	27	26	23	25	26	27	24	CAPACITY - 30
SUFFICIENCY RATING		44	42	93	42	49	94	50	55	50	89			47	57	49		56	57	74	71	53	66	67	70	65	53	SUFFICIENCY RATING
ADJUSTED RATING		43	46	94	47	56	96	60	65	57	90			46	58	49		56	57	74	71	53	66	67	70	65	52	ADJUSTED RATING
DEFICIENT MILEAGE		1.23	2.66	.04	4.49	3.59	.06	2.21	2.28	2.26	.65			1.99	4.07	2.18		.32	1.29	.17	.55	.27	.40	2.25	.60	.30	1.52	DEFICIENT MILEAGE

FAP ROUTE NO 45
SHEET 1 OF 1

BEGINNING MILE POST	0.0	0.1	1.1	4.1	7.7	16.9	26.3	31.6	36.8	41.8	51.2	51.3	56.5	58.0	58.8	64.9	65.2	73.6	75.0	76.4	77.1
LENGTH	0.1	1.0	2.9	3.6	9.3	9.2	5.2	5.2	4.9	9.3	0.1	5.5	1.0	0.8	6.0	0.3	8.2	1.3	1.4	0.4	0.7
YEAR BUILT	60	G	60	60	60	62	65	65	65	61	61	61	61	61	61	TC	61	68	68	34	U
YEAR IMPROVED	63	U	63	63	63	62	65	65	65	61	61	61	61	61	61	7C	61	68	68	57	N
SURFACE WIDTH	28	T	28	28	28	30	28	26	26	26	26	26	26	30	26	44	26	34	34	32	O C
ROADWAY WIDTH	28		28	28	28	30	28	26	26	28	28	28	28	33	28	44	28	34	34	32	E C
SURFACE TYPE	PMS	D	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	BST	R N
ADT	250	F	253	260	288	305	299	288	286	286	286	283	230	250	341	427	489	494	496	498	S
OHV	37		37	39	43	45	44	43	42	42	42	42	34	37	51	64	73	74	74	74	T
SERVICE VOLUME	406	S	126	468	355	604	531	552	392	353	442	364	377	476	327	464	311	425	470	655	R
FOUNDATION - 10	10	T	9	7	9	7	8	8	7	6	7	5	5	6	4	8	3	8	9	5	U
SURFACE - 30	28	A	23	21	26	23	19	20	21	17	18	15	16	18	16	21	15	27	28	17	C
DRAINAGE - 10	10	T	10	10	10	10	10	10	10	9	10	10	10	10	8	10	6	10	10	10	T
SAFETY - 20	0	E	1	20	7	20	5	15	20	2	20	2	2	6	3	1	1	4	2	3	I
CAPACITY - 30	29		26	29	28	29	29	29	28	28	29	28	29	29	28	28	26	27	28	28	O
SUFFICIENCY RATING	77		69	87	80	89	71	82	86	62	84	60	62	65	55	68	51	76	77	63	N
ADJUSTED RATING	83		77	91	85	92	77	87	90	70	88	68	71	77	66	73	55	79	80	67	
DEFICIENT MILEAGE	.02		.91	.47	1.87	1.01	1.52	.95	.69	3.55	.01	2.23	.40	.25	2.48	.12	4.93	.31	.32	.18	

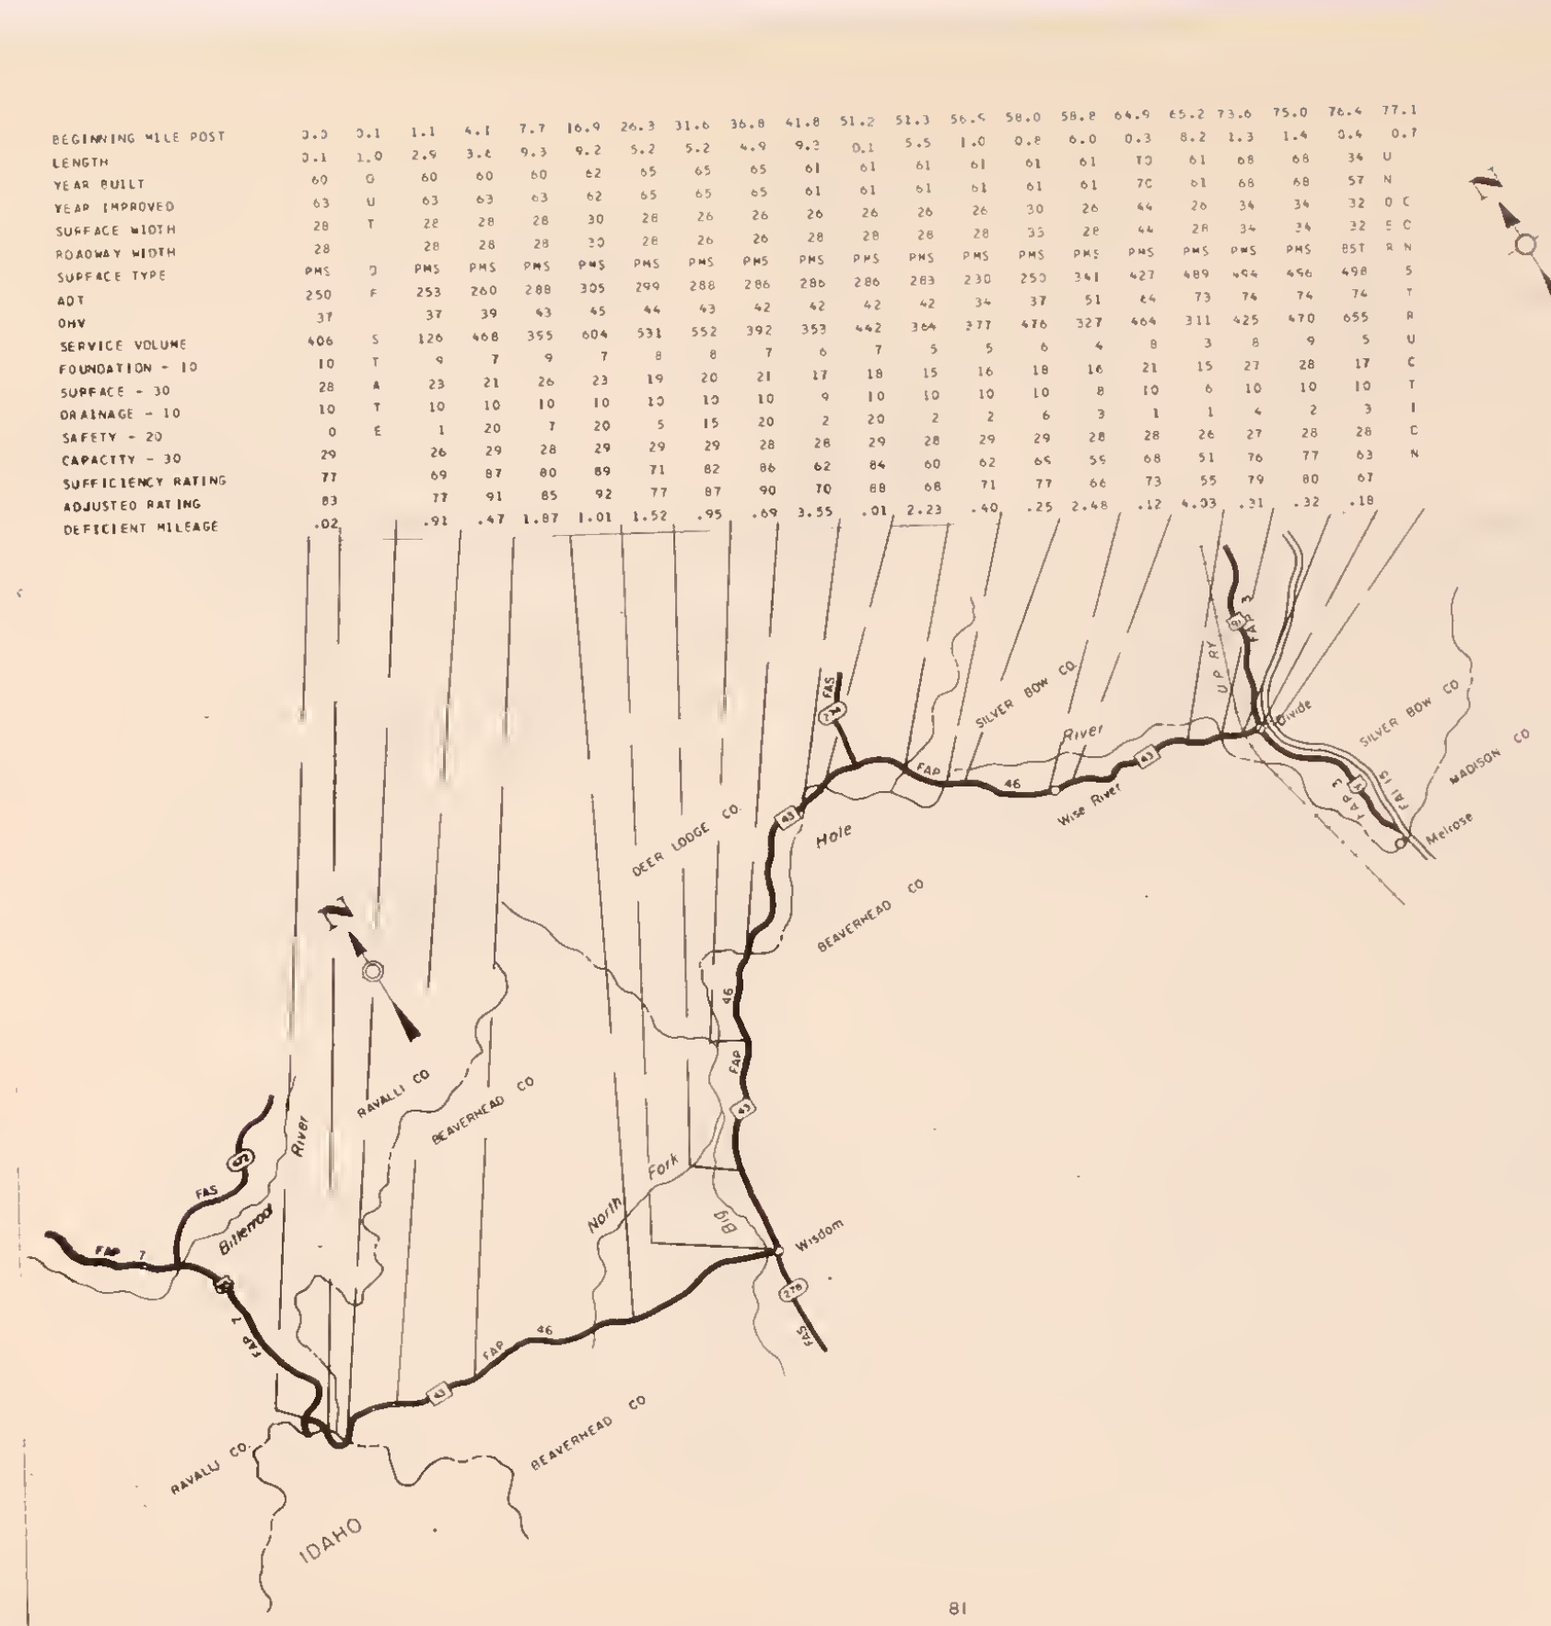

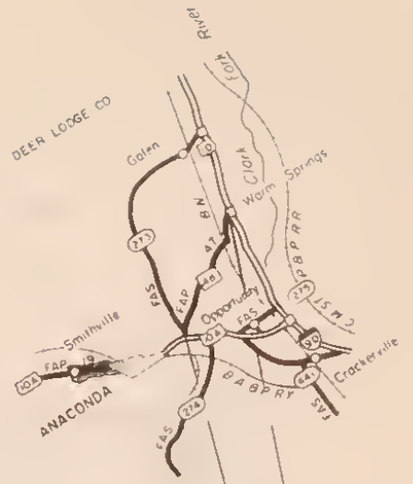

BEGINNING MILE POST	0.0
LENGTH	5.9
YEAR BUILT	49
YEAR IMPROVED	49
SURFACE WIDTH	20
ROADWAY WIDTH	26
SURFACE TYPE	RMS
ADT	1133
OHV	158
SERVICE VOLUME	535
FOUNDATION - 10	3
SURFACE - 30	16
DRAINAGE - 10	8
SAFETY - 20	20
CAPACITY - 30	26
SUFFICIENCY RATING	73
ADJUSTED RATING	71
DEFICIENT MILEAGE	1.61

FAP ROUTES 46 & 47
SHEET 1 OF 1

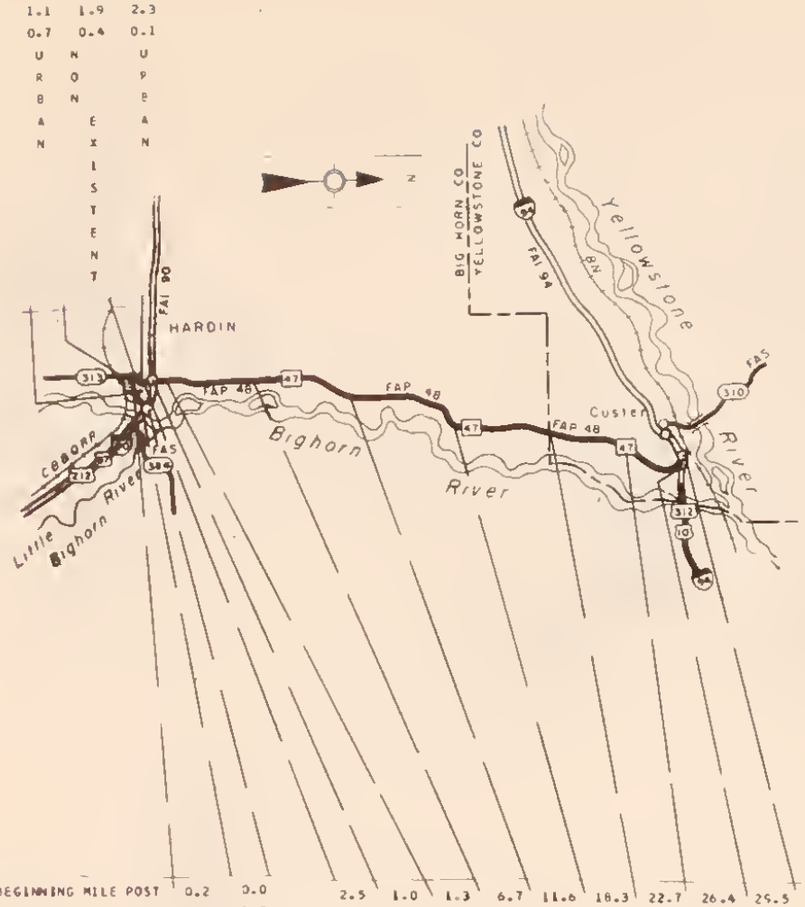

BEGINNING MILE POST	0.2	0.0	2.5	1.0	1.3	6.7	11.6	18.3	22.7	26.4	29.5
LENGTH	0.8	0.2	0.1	0.2	5.4	4.8	6.6	4.3	3.6	3.1	0.3
YEAR BUILT	34	71	70	70	41	45	54	63	63	63	74
YEAR IMPROVED	59	71	70	70	41	45	54	63	63	63	74
SURFACE WIDTH	24	40	40	40	20	20	24	28	28	28	34
ROADWAY WIDTH	24	40	40	40	24	24	24	28	28	28	34
SURFACE TYPE	RMS	PMS	RMS	RMS	RMS	RMS	RMS	PMS	PMS	PMS	PMS
ADT	3505	3505	2992	1743	1023	372	271	272	282	294	306
DHV	455	455	418	244	143	52	37	38	39	41	42
SERVICE VOLUME	664	464	299	120	345	333	429	312	294	504	351
FOUNDATION - 10	0	9	7	7	0	2	4	9	9	10	10
SURFACE - 30	8	28	21	23	14	15	16	27	27	27	30
DRAINAGE - 10	4	10	10	10	8	9	10	10	10	10	10
SAFETY - 20	20	20	20	1	8	20	10	4	18	20	2
CAPACITY - 30	20	15	9	0	24	28	29	28	28	29	28
SUFFICIENCY RATING	52	82	67	41	54	74	69	78	92	96	80
ADJUSTED RATING	42	76	59	36	53	79	76	84	94	97	85
DEFICIENT MILEAGE	.42	.05	.05	.16	2.51	1.26	2.06	.96	.29	.12	.06

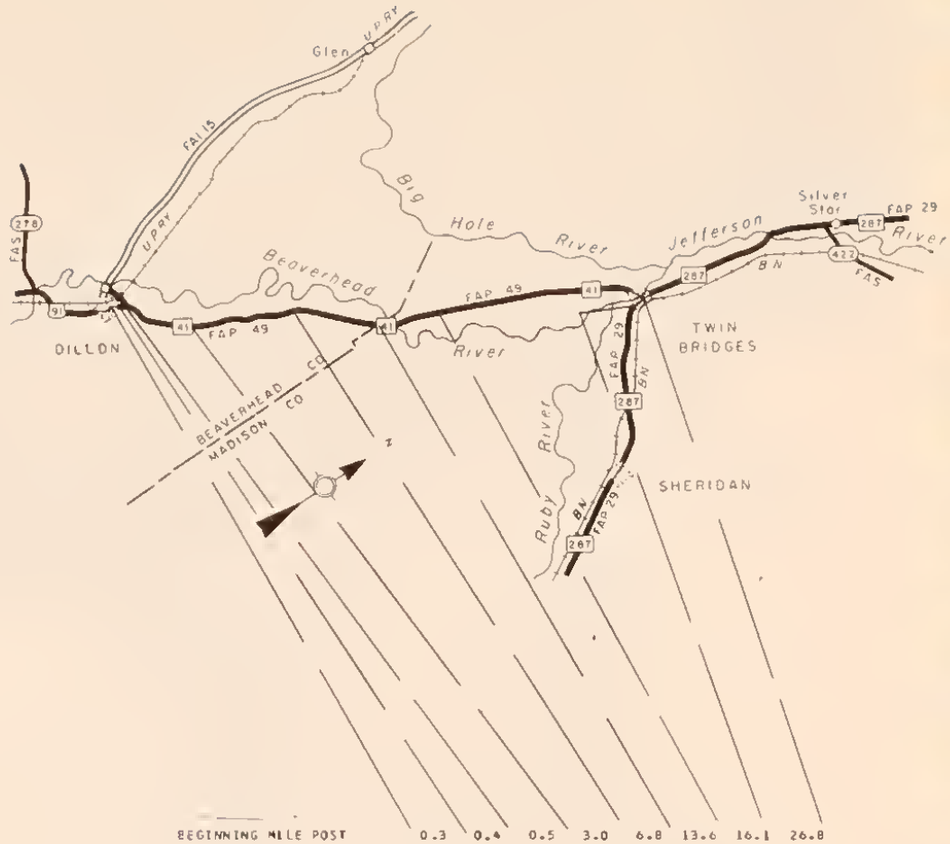

BEGINNING MILE POST	0.3	0.4	0.5	3.0	6.8	13.6	16.1	26.8
LENGTH	0.1	0.1	2.4	3.7	6.8	2.4	10.6	0.7
YEAR BUILT	36	U	36	36	59	59	53	U
YEAR IMPROVED	73	R	62	46	59	59	53	R
SURFACE WIDTH	40	B	26	20	24	24	24	B
ROADWAY WIDTH	40	A	26	24	24	24	28	A
SURFACE TYPE	RMS	N	RMS	RMS	RMS	RMS	RMS	N
ADT	2872		1088	1033	919	900	904	
DHV	373		141	134	119	117	117	
SERVICE VOLUME	828		526	220	220	333	586	
FOUNDATION - 10	5		0	0	2	0	2	
SURFACE - 30	18		17	11	17	16	14	
DRAINAGE - 10	6		7	8	10	8	8	
SAFETY - 20	20		8	2	5	12	15	
CAPACITY - 30	23		26	21	22	25	27	
SUFFICIENCY RATING	72		58	42	56	61	66	
ADJUSTED RATING	65		56	41	56	61	66	
DEFICIENT MILEAGE	.02		1.01	2.20	3.02	.97	3.62	

FAP ROUTE NO 48 & 49
SHEET 1 OF 1

BEGINNING MILE POST	50.8	53.8	58.0
LENGTH	3.0	4.6	2.4
YEAR BUILT	72	N	N
YEAR IMPROVED	72	O	O
SURFACE WIDTH	34	N	N
ROADWAY WIDTH	34	E	E
SURFACE TYPE	GRV	X	X
ADT	746	I	I
DHV	110	S	S
SERVICE VOLUME	535	T	T
FUUNDATION - 10	0	E	E
SURFACE - 30	0	N	N
DRAINAGE - 10	10	T	T
SAFETY - 20	2		
CAPACITY - 30	27		
SUFFICIENCY RATING	39		
ADJUSTED RATING	40		
DEFICIENT MILEAGE	1.83		

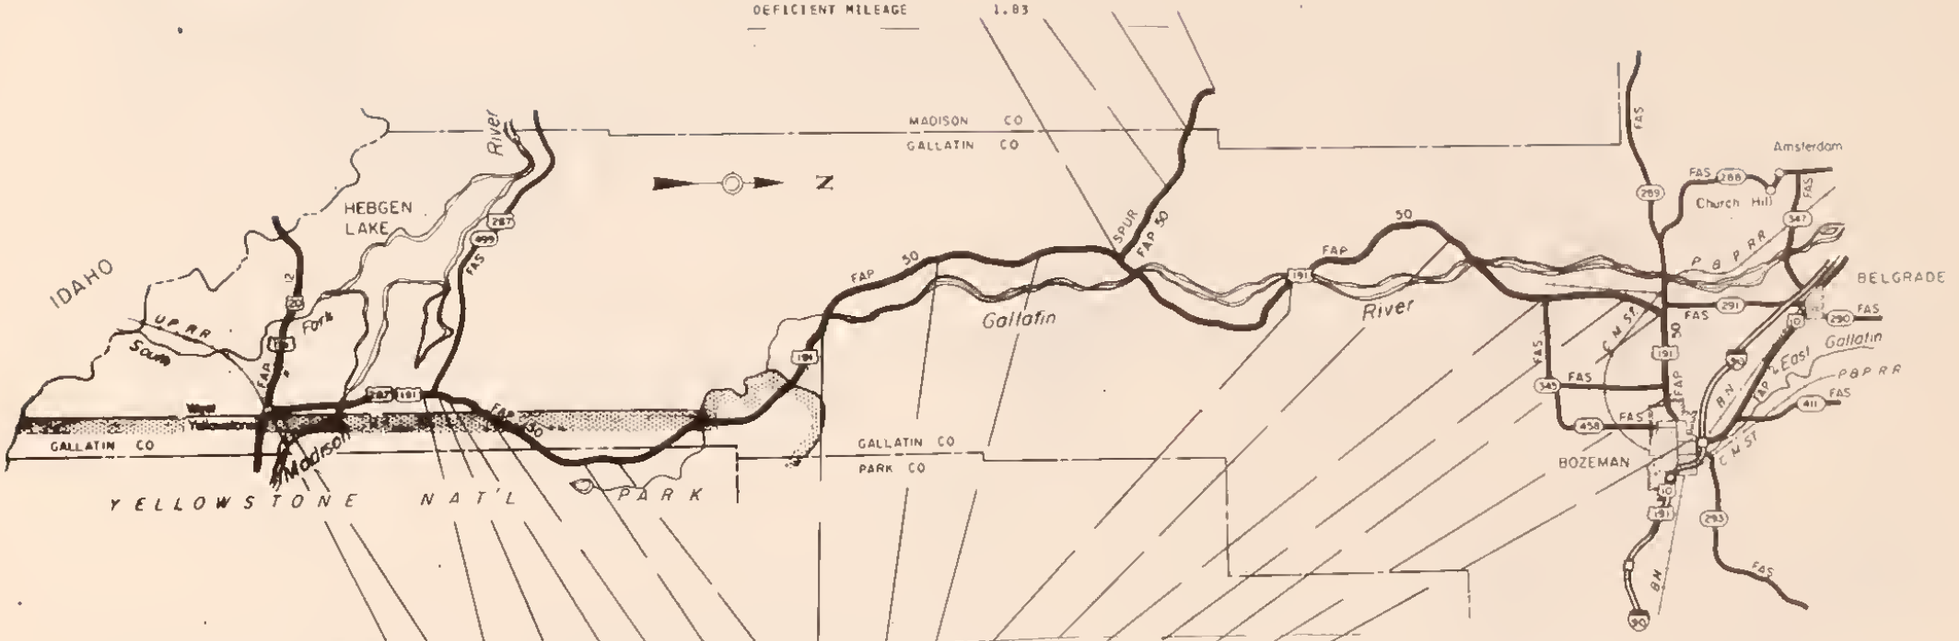

BEGINNING MILE POST	0.0	0.5	7.3	8.3	8.5	10.4	15.0	16.6	31.1	40.1	47.9	60.8	70.1	76.4	80.0	81.9	87.0	BEGINNING MILE POST
LENGTH	0.5	7.1	1.0	0.1	1.9	4.3	1.6	14.5	8.9	7.8	12.9	9.3	6.2	3.5	1.8	5.2	3.5	LENGTH
YEAR BUILT	U	68	64	64	62	63	63	63	60	60	55	67	58	64	64	60	U	YEAR BUILT
YEAR IMPROVED	R	68	64	64	72	63	63	63	60	60	55	67	60	64	64	60	R	YEAR IMPROVED
SURFACE WIDTH	B	40	34	52	32	32	32	32	28	28	28	28	32	32	36	36	B	SURFACE WIDTH
ROADWAY WIDTH	A	40	34	52	32	32	32	32	28	28	28	28	32	32	36	36	A	ROADWAY WIDTH
SURFACE TYPE	N	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	PMS	N	SURFACE TYPE
ADT		1518	1300	879	827	763	763	763	815	913	1459	1748	1933	2438	2835	4455		ADT
DHV		333	286	138	129	119	119	119	127	143	229	274	338	463	475	668		DHV
SERVICE VOLUME		288	720	298	182	470	182	599	436	436	283	203	696	720	264	283		SERVICE VOLUME
FOUNDATION - 10		9	8	9	10	7	6	6	7	7	5	9	9	8	8	8		FOUNDATION - 10
SURFACE - 30		25	23	26	27	21	17	18	21	22	19	28	25	26	25	26		SURFACE - 30
DRAINAGE - 10		10	10	10	10	10	10	10	10	10	9	10	10	10	10	10		DRAINAGE - 10
SAFETY - 20		18	20	1	1	20	20	20	4	5	1	1	10	18	5	5		SAFETY - 20
CAPACITY - 30		13	24	23	19	26	20	27	26	25	18	10	23	20	3	0		CAPACITY - 30
SUFFICIENCY RATING		75	85	69	67	84	73	81	68	69	52	58	77	82	51	49		SUFFICIENCY RATING
ADJUSTED RATING		72	83	65	67	84	74	81	68	69	48	53	73	77	42	37		ADJUSTED RATING
DEFICIENT MILEAGE		1.78	.15	.04	.64	.70	.44	2.77	2.85	2.42	6.21	3.91	1.43	.64	.90	2.65		DEFICIENT MILEAGE

FAP ROUTE 50
SHEET 1 OF 1

BEGINNING MILE POST	0.0	3.3	8.3	9.0	16.7	27.2	27.5	32.5	38.4	49.2	59.9	64.3	BEGINNING MILE POST
LENGTH	3.3	5.0	0.7	9.6	8.4	0.3	5.0	5.8	10.7	10.6	4.4	6.7	LENGTH
YEAR BUILT	60	60	60	59	59	U	58	58	57	56	55	55	YEAR BUILT
YEAR IMPROVED	61	61	61	59	59	R	58	58	57	56	55	55	YEAR IMPROVED
SURFACE WIDTH	30	30	30	28	28	B	28	28	26	25	25	25	SURFACE WIDTH
ROADWAY WIDTH	30	30	30	28	28	A	32	32	30	25	25	25	ROADWAY WIDTH
SURFACE TYPE	PMS	PMS	PMS	PMS	PMS	N	BST	BST	BST	BST	BST	BST	SURFACE TYPE
ADT	313	247	207	194	195		235	201	222	307	349	516	ADT
DHV	43	34	28	27	27		32	28	31	42	48	72	DHV
SERVICE VOLUME	655	463	702	371	342		580	428	565	400	377	508	SERVICE VOLUME
FOUNDATION - 10	7	7	9	4	3		5	0	0	0	4	3	FOUNDATION - 10
SURFACE - 30	24	23	25	17	18		18	13	12	15	18	17	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10		10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	13	9	20	5	7		14	13	8	19	20	17	SAFETY - 20
CAPACITY - 30	29	29	29	25	29		29	29	29	28	28	28	CAPACITY - 30
SUFFICIENCY RATING	83	78	93	65	67		76	65	59	72	80	75	SUFFICIENCY RATING
ADJUSTED RATING	87	84	95	75	77		83	75	69	78	84	78	ADJUSTED RATING
DEFICIENT MILEAGE	.56	1.10	.05	3.38	2.79		1.20	2.04	4.42	2.98	.88	1.69	DEFICIENT MILEAGE

FAP ROUTE 51
SHEET 1 OF 1

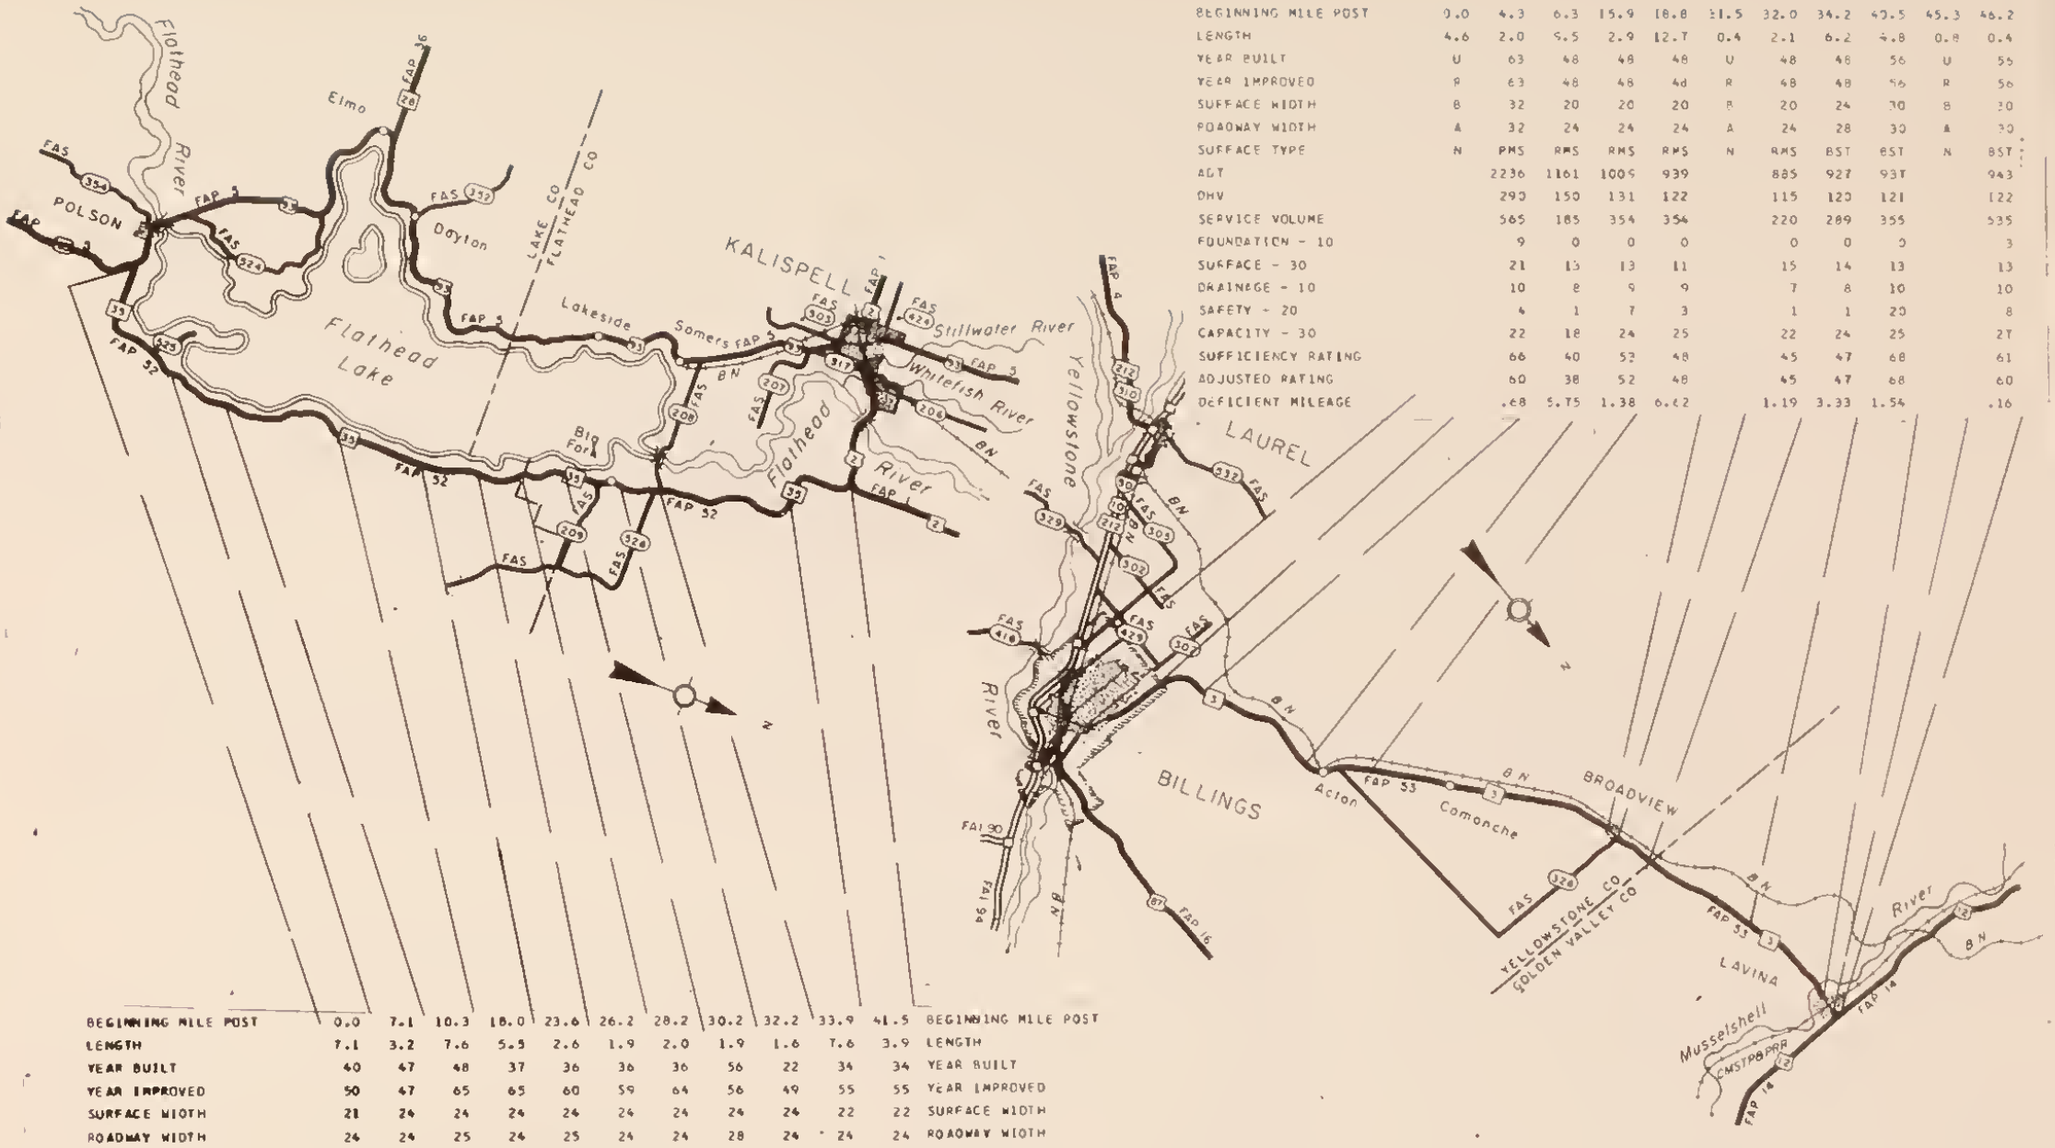

BEGINNING MILE POST	0.0	7.1	10.3	18.0	23.6	26.2	28.2	30.2	32.2	33.9	41.5	BEGINNING MILE POST
LENGTH	7.1	3.2	7.6	5.5	2.6	1.9	2.0	1.9	1.6	7.6	3.9	LENGTH
YEAR BUILT	40	47	48	37	36	36	36	56	22	34	34	YEAR BUILT
YEAR IMPROVED	50	47	65	65	60	59	64	56	49	55	55	YEAR IMPROVED
SURFACE WIDTH	21	24	24	24	24	24	24	24	24	22	22	SURFACE WIDTH
ROADWAY WIDTH	24	24	25	24	25	24	24	28	24	24	24	ROADWAY WIDTH
SURFACE TYPE	BST	BST	RMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	RMS	SURFACE TYPE
AOT	1929	1153	1282	1644	1676	1758	1892	2176	2427	1425	1614	AOT
DHV	285	170	189	243	248	260	280	322	359	210	238	DHV
SERVICE VOLUME	184	187	468	301	431	174	187	177	431	390	390	SERVICE VOLUME
FOUNDATION - 10	0	0	0	0	0	0	0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	13	13	14	11	14	13	13	14	11	13	11	SURFACE - 30
DRAINAGE - 10	7	6	8	7	6	5	5	10	6	4	4	DRAINAGE - 10
SAFETY - 20	1	2	7	2	9	10	2	4	3	1	3	SAFETY - 20
CAPACITY - 30	7	16	24	18	21	8	8	3	18	22	21	CAPACITY - 30
SUFFICIENCY RATING	28	37	53	38	50	36	28	31	38	40	39	SUFFICIENCY RATING
ADJUSTED RATING	23	35	50	34	45	31	23	25	31	37	35	ADJUSTED RATING
DEFICIENT MILEAGE	5.13	2.02	3.59	3.46	1.33	1.27	1.44	1.36	1.04	4.58	2.42	DEFICIENT MILEAGE

BEGINNING MILE POST	0.0	4.3	6.3	15.9	18.8	31.5	32.0	34.2	40.5	45.3	46.2	
LENGTH	4.6	2.0	5.5	2.9	12.7	0.4	2.1	6.2	4.8	0.8	0.4	
YEAR BUILT	U	63	48	48	48	U	48	48	56	U	55	
YEAR IMPROVED	R	63	48	48	48	R	48	48	56	R	56	
SURFACE WIDTH	B	32	20	20	20	B	20	24	30	B	30	
ROADWAY WIDTH	A	32	24	24	24	A	24	28	30	A	30	
SURFACE TYPE	N	RMS	RMS	RMS	RMS	N	RMS	BST	BST	N	BST	
AOT		2236	1161	1006	939		885	927	937		943	
DHV		290	150	131	122		115	120	121		122	
SERVICE VOLUME		565	185	354	354		220	289	355		535	
FOUNDATION - 10		9	0	0	0		0	0	0		3	
SURFACE - 30		21	13	13	11		15	14	13		13	
DRAINAGE - 10		10	8	9	9		7	8	10		10	
SAFETY - 20		4	1	7	3		1	1	20		8	
CAPACITY - 30		22	18	24	25		22	24	25		27	
SUFFICIENCY RATING		66	40	52	48		45	47	68		61	
ADJUSTED RATING		60	38	52	48		45	47	68		60	
DEFICIENT MILEAGE		.68	5.75	1.38	6.62		1.19	3.33	1.54		.16	

FAP ROUTE NO 52 & 53
SHEET 1 OF 1

BEGINNING MILE POST	0.0	9.1	17.6	23.1
LENGTH	9.1	8.7	5.9	5.5
YEAR BUILT	59	68	74	U
YEAR IMPROVED	66	68	75	N
SURFACE WIDTH	24	30	30	D C
ROADWAY WIDTH	24	32	30	E O
SURFACE TYPE	BST	PMS	PMS	R N
ADT	294	284	328	S
DHV	38	36	42	T
SERVICE VOLUME	258	420	426	R
FOUNDATION - 10	0	8	10	U
SURFACE - 30	13	26	30	C
DRAINAGE - 10	10	10	10	T
SAFETY - 20	2	10	20	I
CAPACITY - 30	28	29	29	O
SUFFICIENCY RATING	53	83	99	N
ADJUSTED RATING	61	87	99	
DEFICIENT MILEAGE	4.28	1.49	.05	

FAP ROUTE NO 54
SHEET 1 OF 1.

SUFFICIENCY RATINGS BY FINANCIAL DISTRICTS

SUFFICIENCY RATING BY FINANCIAL DISTRICT I

RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 1

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	AOT	DHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- ENO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ01	138+0.280	JCT FAP RTE 38	FLATHEAD	1	34	66	1.705	24	30	RMS	4122	787	365	0	13	8	7	0	28	19	1.2
PJ38	7+0.387	COLUMBIA FALLS	FLATHEAD	1	37	55	.372	22	24	RMS	3260	456	243	0	11	7	7	2	27	19	.3
PJ38	8+0.078	0.6 E COL FALLS	FLATHEAD	1	37	55	.577	22	24	RMS	3260	456	280	0	11	6	6	6	29	21	.4
PJ52	28+0.294	FLATHEAD CO	FLATHEAD	1	36	64	2.004	24	24	RMS	1892	280	187	0	13	5	2	8	28	23	1.4
PJ52	0+0.000	JCT FAP RTE 5	LAKE	1	40	50	7.134	21	24	BST	1929	265	184	0	13	7	1	7	28	23	5.1
PJ01	142+0.567	1.0 W HUNGRY HORSE	FLATHEAD	1	31	34	10.886	20	24	RMS	2480	473	415	0	12	5	1	15	31	24	7.5
PJ01	124+0.638	0.7 E KALISPELL	FLATHEAD	1	40	64	3.634	30	30	RMS	3230	516	327	3	13	8	4	6	34	25	2.4
PJ52	30+0.238	2.0 N FLATHEAD CO	FLATHEAD	1	56	56	1.975	24	28	RMS	2176	322	177	0	14	10	4	3	31	25	1.4
PJ38	4+0.134	0.3 W FAS 206	FLATHEAD	I	39	53	2.274	24	24	RMS	4729	662	759	0	9	8	2	17	36	25	1.5
PJ01	25+0.405	6.4 W LIBBY	LINCOLN	1	38	62	4.437	24	24	RMS	2015	261	530	0	9	3	1	23	36	30	2.8
PJ01	16+0.932	JCT FAS RTE 202	LINCOLN	1	34	38	4.574	20	24	RMS	1550	201	211	0	12	3	3	16	34	30	3.0
PJ05	15+0.054	LAKE CO	LAKE	1	40	40	3.437	24	30	RMS	3414	498	468	0	12	8	6	14	40	30	2.1
PJ05	24+0.366	9.3 N LAKE CO	LAKE	I	55	60	3.147	32	32	PMS	3410	497	268	6	18	10	4	2	40	30	1.9
PJ05	79+0.397	1.8 N JCT FAP 36	LAKE	1	32	52	6.932	22	24	RMS	1319	178	303	0	7	4	1	21	33	30	4.6
PJ05	128+0.492	WHITEFISH	FLATHEAD	1	34	54	6.201	22	28	RMS	1270	165	202	0	10	4	1	18	33	31	4.2
PJ52	32+0.237	1.7 S FAS 208	FLATHEAD	1	22	49	1.691	24	24	RMS	2427	359	431	0	11	6	3	16	38	31	1.0
PJ52	26+0.286	2.0 S FLATHEAD CO	LAKE	I	36	59	1.995	24	24	RMS	1758	260	174	0	13	5	10	8	36	31	1.3
PJ05	35+0.351	2.3 N ST IGNATIUS	LAKE	1	50	50	5.797	24	30	RMS	3224	470	453	0	15	8	4	14	41	32	3.4
PJ01	140+0.373	1.7 E FAP 38	FLATHEAD	I	29	65	2.443	24	24	RMS	3672	701	556	4	16	10	1	11	42	32	1.4
PJ01	180+0.514	16.2 W GLACIER CO	FLATHEAD	I	33	35	3.632	18	20	RMS	700	133	199	0	8	3	0	20	31	32	2.5
PJ05	86+0.330	2.0 S POLLINS	LAKE	1	33	65	6.417	24	24	RMS	1375	185	335	0	10	4	1	22	37	34	4.0
PJ52	18+0.000	YELLOW BAY	LAKE	1	37	65	5.585	24	24	RMS	1644	243	301	0	11	7	2	18	38	34	3.5
PJ52	7+0.124	7.1 N FAP 5	LAKE	1	47	47	3.214	24	24	BST	1153	170	187	0	13	6	2	16	37	35	2.0
PJ52	41+0.541	CRESTON	FLATHEAD	1	34	55	3.975	22	24	RMS	1614	238	390	0	11	4	3	21	39	35	2.4
PJ33	0+0.658	LIBBY	LINCOLN	1	59	59	.558	26	37	BST	3523	457	397	5	16	10	1	13	45	35	.3
PJ05	168+0.284	FORTINE	LINCOLN	1	33	51	9.654	22	22	RMS	1279	166	396	0	8	5	1	24	38	35	6.0
PJ05	179+0.692	EUREKA	LINCOLN	1	43	57	1.370	22	24	RMS	1869	242	357	0	11	8	1	20	40	35	.8
PJ01	128+0.337	JCT FAP RTE 52	FLATHEAD	1	34	51	10.056	22	24	RMS	2415	461	716	0	10	8	4	20	42	35	5.8
PJ01	15+0.265	TROY	LINCOLN	1	37	38	1.655	20	24	RMS	1846	239	365	0	11	5	5	20	41	36	1.0
PJ01	106+0.450	12.9 W KALISPELL	FLATHEAD	1	49	63	6.886	24	27	RMS	1455	189	198	0	12	8	4	16	40	36	4.1
PJ52	33+0.928	JCT FAS RTE 208	FLATHEAD	I	34	59	7.644	22	24	RMS	1425	210	390	0	13	4	1	22	40	37	4.6
PJ38	8+0.655	1.3 E COL FALLS	FLATHEAD	1	71	71	.242	44	44	RMS	3260	456	326	8	21	10	0	9	48	38	.1
PJ01	21+0.505	4.6 E FAS 202	LINCOLN	1	37	70	3.927	25	26	RMS	1795	233	528	0	9	4	8	23	44	39	2.2
PJ05	33+0.097	0.3 N ST IGNATIUS	LAKE	1	56	60	1.843	32	32	PMS	3352	489	503	4	13	10	7	15	49	39	.9
PJ01	37+0.886	5.1 E LIBBY	LINCOLN	1	36	61	6.390	24	24	RMS	1229	159	353	0	11	7	1	23	42	40	3.7
PJ01	153+0.428	JCT W GLACIER SPUR	FLATHEAD	1	48	49	3.205	24	28	PMS	975	186	129	6	19	7	2	8	42	41	1.9
PJ06	115+0.193	LAKE CO	LAKE	1	34	52	.936	20	24	RMS	1045	155	387	0	9	8	1	24	42	41	.5
PJ05	61+0.600	0.6 N POLSON	LAKE	I	54	54	2.852	24	32	PMS	1999	269	544	0	12	10	3	23	48	42	1.5
PJ05	41+0.154	5.4 S RONAN	LAKE	1	66	66	5.018	40	40	PMS	3682	527	281	6	21	10	14	1	52	42	2.4
PJ05	57+0.826	1.1 S FAP 52	LAKE	1	58	58	1.188	32	32	PMS	4584	669	454	6	18	10	12	8	54	42	.5
PJ01	49+0.289	13.5 E FAS 482	LINCOLN	1	35	39	6.869	20	24	RMS	1040	135	264	0	14	4	3	22	43	42	3.9
PJ05	104+0.255	JCT FAS 208	FLATHEAD	1	49	61	5.341	38	38	RMS	5540	664	383	7	22	10	13	4	56	43	2.4
PJ05	159+0.617	STRYKER	LINCOLN	1	31	64	8.683	24	24	RMS	820	106	431	0	13	4	1	26	44	44	4.9
PJ01	69+0.548	9.2 E FLATHEAD CO	FLATHEAD	1	36	57	9.847	24	25	RMS	1076	139	249	0	13	6	4	22	45	44	5.4
PJ01	71+0.596	8.7 W FLATHEAD CO	LINCOLN	1	37	52	6.645	22	24	RMS	940	122	272	0	15	5	2	23	45	44	3.7
PJ01	60+0.387	FLATHEAD CO LINE	FLATHEAD	1	52	52	9.172	28	28	RMS	1047	136	212	0	14	7	5	20	46	45	5.0
PJ52	23+0.600	4.7 S FLATHEAD CO	LAKE	1	36	60	2.661	24	25	RMS	1676	248	431	0	14	6	9	21	50	45	1.5
PJ01	64+0.847	15.5 W FLATHEAD CO	LINCOLN	1	41	43	6.753	20	24	RMS	862	112	288	0	13	7	2	24	46	46	3.6
PJ01	103+0.175	3.8 E MARION	FLATHEAD	1	40	63	3.262	24	24	RMS	1354	176	249	0	14	8	8	19	49	46	1.7
PJ01	44+0.296	8.5 E FAS 482	LINCOLN	1	36	65	5.006	20	24	RMS	1055	137	184	0	13	7	8	19	47	46	2.7
PJ05	98+0.643	5.2 NLFLATHEADCCO	FLATHEAD	1	63	63	5.548	32	32	PMS	2511	338	298	6	22	10	3	13	54	46	2.6
PJ05	34+0.947	2.1 N ST IGNATIUS	LAKE	1	72	72	.388	32	32	PMS	3302	482	399	7	23	10	4	12	56	46	.2
PJ05	27+0.503	JCT FAP 6	LAKE	1	56	60	2.550	44	44	PMS	2802	409	578	5	18	10	3	19	55	47	1.1
PJ05	32+0.761	ST IGNATIUS	LAKE	1	69	69	.340	44	44	RMS	3093	451	88	5	21	10	20	0	56	47	.1
PJ33	1+0.219	0.6 N LIBBY	LINCOLN	1	42	50	8.320	28	28	BST	1572	204	349	3	16	8	3	21	51	47	4.1

FINANCIAL DISTRICT NUMBER 1

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	CRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ01	56+0.167	20.4 E FAS 482	LINCOLN	1	38	50	8.685	20	26	RMS	1004	130	312	0	11	6	8	24	49	48	4.4
PJ01	113+0.334	6.0 W KALISPELL	FLATHEAD	1	49	51	6.278	24	31	RMS	2018	262	452	3	14	8	8	21	54	48	2.9
PJ05	61+0.013	POLSON	LAKE	1	66	66	.587	40	40	PMS	2712	366	289	9	26	10	1	11	57	49	.3
PJ05	93+0.536	FLATHEAD CO	FLATHEAD	1	64	64	5.181	32	32	PMS	1926	260	243	4	18	10	9	14	55	49	2.3
PJ05	114+0.864	KALISPELL	FLATHEAD	1	57	60	5.800	36	36	PMS	3549	425	309	6	24	10	11	9	60	50	2.3
PJ05	18+0.483	3.4 N LAKE CO	LAKE	1	55	60	5.861	32	32	PMS	3401	496	536	6	19	10	9	16	60	50	2.3
PJ52	12+2.345	10.3 N FAP 5	LAKE	1	48	65	7.657	24	25	RMS	1282	189	468	0	14	8	7	24	53	50	3.6
PJ38	0+0.000	JCT FAP STE 5	FLATHEAD	1	75	75	4.149	44	44	PMS	2268	315	191	10	30	10	3	5	58	51	1.7
PJ05	59+0.004	JCT FAP 52	LAKE	1	58	58	.331	40	40	PMS	6163	899	326	9	25	10	20	0	64	51	.1
PJ01	2+0.687	2.6 E IDAHO LINE	LINCOLN	1	49	51	4.352	22	29	PMS	1026	133	338	4	14	8	2	24	52	51	2.1
PJ01	6+0.582	3.2 E FAS 508	LINCOLN	1	49	51	6.959	22	28	PMS	1349	175	508	2	14	8	6	25	55	52	3.1
PJ05	30+0.048	2.5 N JCT FAP 6	LAKE	1	56	60	2.564	32	32	PMS	2611	381	503	4	17	10	10	19	60	52	1.0
PJ05	56+0.943	2.0 S FAP 52	LAKE	1	73	73	.882	40	40	PMS	4495	656	308	8	25	10	20	0	63	52	.2
PJC1	99+0.410	MARION	FLATHEAD	1	47	61	3.779	24	30	RMS	1286	167	292	0	15	7	13	21	56	53	1.7
PJ01	667+0.145	JCT FAP 1 W GLAC	FLATHEAD	1	38	38	.304	40	40	PMS	1567	316	614	7	16	7	6	22	58	54	.1
PJ36	31+0.049	FLATHEAD CO	FLATHEAD	1	40	51	4.443	20	26	RMS	461	69	278	0	13	6	4	26	49	54	2.3
PJ33	64+0.921	2.0 E FA 5	LINCOLN	1	40	40	1.975	20	24	RMS	674	87	448	0	9	8	8	27	52	54	.9
PJ05	64+0.489	3.5 N POLSON	LAKE	1	54	54	2.938	24	32	PMS	1718	231	365	5	17	10	7	21	60	55	1.2
PJ05	47+0.372	RONAN	LAKE	1	70	70	6.021	40	40	PMS	3655	533	309	10	28	10	13	4	65	55	2.1
PJ05	120+0.677	5.8 N KALISPELL	FLATHEAD	1	60	60	4.785	36	36	PMS	3681	441	662	4	19	10	12	20	65	55	1.7
PJ05	53+0.399	6.0 N RONAN	LAKE	1	58	58	3.432	32	32	PMS	4322	631	688	8	23	10	10	16	67	57	1.1
PJC5	125+0.445	JCT FAP 38	FLATHEAD	1	60	60	1.488	36	36	PMS	6276	753	937	6	20	10	15	18	69	57	.5
PJ01	166+0.253	12.7 E WEST GLAC	FLATHEAD	1	49	59	2.834	26	26	PMS	892	170	384	5	19	10	1	23	58	58	1.2
PJ01	78+0.265	2.1 W FLATHEAD CO	LINCOLN	1	37	53	2.143	22	24	RMS	1020	132	290	0	17	6	14	23	60	59	.9
PJ36	31+0.128	LAKE CO	LAKE	1	40	40	.511	20	25	BST	476	71	266	0	13	7	10	26	56	60	.2
PJ36	40+0.186	LAKE CO	LAKE	1	37	65	6.525	24	26	RMS	457	68	318	0	13	7	8	27	55	60	2.9
PJ01	164+0.714	11.2 E WEST GLAC	FLATHEAD	1	49	59	1.514	26	26	PMS	892	170	357	6	19	10	3	23	61	61	.6
PJ05	180+0.908	JCT FAP 33	LINCOLN	1	50	50	6.546	24	24	PMS	381	49	353	0	15	9	3	28	55	61	2.9
PJ01	156+0.627	3.2 E WEST GLACIER	FLATHEAD	1	65	65	.521	24	28	RMS	952	181	378	7	23	10	0	23	63	62	.2
PJC1	157+0.164	3.7 E WEST GLACIER	FLATHEAD	1	48	49	2.350	24	28	PMS	936	178	154	6	17	7	20	13	63	63	.9
PJ05	156+0.922	LINCOLN CO	LINCOLN	1	55	60	2.697	26	26	PMS	629	81	319	4	17	9	5	26	61	63	1.1
PJ05	134+0.691	6.8 N WHITEFISH	FLATHEAD	1	55	59	10.962	24	28	PMS	976	126	569	3	17	10	8	27	65	64	3.8
PJC1	123+0.228	KALISPELL U L	FLATHEAD	1	67	67	1.404	44	44	PMS	3505	490	731	9	27	10	7	20	73	65	.4
PJ01	159+0.503	6.0 E WEST GLACIER	FLATHEAD	1	49	59	5.217	26	26	PMS	899	171	357	5	18	8	12	23	66	66	1.8
PJ05	67+0.425	6.4 N POLSON	LAKE	1	54	70	3.855	30	30	PMS	1594	215	414	7	26	9	6	22	70	66	1.2
PJ05	71+0.313	6.2 S FAP 36	LAKE	1	62	62	6.212	32	32	PMS	1399	188	453	7	22	10	7	24	70	67	1.9
PJ05	145+0.620	OLNEY	FLATHEAD	1	55	60	11.263	26	26	PMS	675	87	319	3	18	9	9	26	65	67	3.9
PJC1	197+0.193	0.6 W GLACIER CC	FLATHEAD	1	52	70	.623	26	26	PMS	778	148	324	8	25	10	0	23	66	67	.2
PJ01	184+0.217	12.6 W GLACIER CO	FLATHEAD	1	67	67	12.259	32	32	PMS	736	140	575	7	21	10	6	26	70	71	3.7
PJ05	77+0.587	JCT FAP 36	LAKE	1	62	62	1.837	32	32	PMS	1276	172	672	7	21	10	9	26	73	71	.5
PJ36	26+0.100	4.4 N FLATHEAD CO	FLATHEAD	1	37	61	4.101	24	26	RMS	433	64	825	0	10	7	20	29	66	71	1.4
PJ05	46+0.161	0.4 S RONAN	LAKE	1	70	70	.411	40	40	PMS	4151	606	784	8	25	10	20	18	81	74	.1
PJ01	0+0.000	IDAHO LINE	LINCOLN	1	54	55	2.622	24	30	PMS	1004	120	323	4	18	9	20	24	75	74	.7
PJ33	9+0.560	6.9 N LIBBY	LINCOLN	1	67	67	4.431	34	34	PMS	783	101	688	9	26	10	4	28	77	77	1.0
PJ33	54+0.527	0.7 N RES BR	LINCOLN	1	71	71	10.394	34	34	PMS	494	64	365	9	27	10	1	27	74	77	2.7
PJ05	92+0.740	4.9 N POLLINS	LAKE	1	64	64	.749	32	32	PMS	1412	190	276	7	23	10	20	20	80	78	.1
PJ33	14+0.002	13.3 N LIBBY	LINCOLN	1	74	74	3.652	34	34	PMS	418	54	289	10	30	10	2	27	79	82	.8
PJ33	17+0.654	LIBBY OAM APPR	LINCOLN	1	74	74	12.374	34	34	PMS	383	49	243	10	30	10	2	27	79	83	2.6
PJC1	171+0.169	25.6 W GLACIER CO	FLATHEAD	1	66	66	6.460	32	32	PMS	883	168	428	7	23	10	20	24	84	84	1.0
PJ33	53+0.851	RESERV BR APPR	LINCOLN	1	71	71	.676	34	34	PMS	203	26	138	10	30	10	1	27	78	85	.1
PJ33	30+0.033	FIVE MILE CR	LINCOLN	1	74	74	12.783	34	34	PMS	195	25	243	10	30	10	2	28	80	87	2.6
PJ33	42+0.817	11.0 S RES BR APPR	LINCOLN	1	74	74	11.169	34	34	PMS	175	22	243	10	30	10	1	29	80	87	2.2
PJ01	177+0.633	19.1 W GLACIER CO	FLATHEAD	1	69	69	2.884	34	34	PMS	782	149	456	10	27	10	20	25	92	92	.2
PJ01	169+0.063	15.8 E WEST GLAC	FLATHEAD	1	75	75	2.107	32	32	PMS	892	170	478	9	28	10	20	25	92	92	.2
PJC1	33+0.316	0.6 E LIBBY	LINCOLN	1			4.544	UNDER CONSTRUCTION													

FINANCIAL DISTRICT NUMBER 1

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	SUF RDY	TYP	ADT	DHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- END SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJC1	32+0.748	LIBBY	LINCOLN	1			.561	UNDER CONSTRUCTION												
PJ01	29+0.863	2.0 W LIBBY	LINCOLN	1			2.036	UNDER CONSTRUCTION												
PJ38	7+0.759	0.3 E COL FALLS	FLATHEAD	1			.303	UNDER CONSTRUCTION												
		DISTRICT TOTAL					488.828												45	222.0

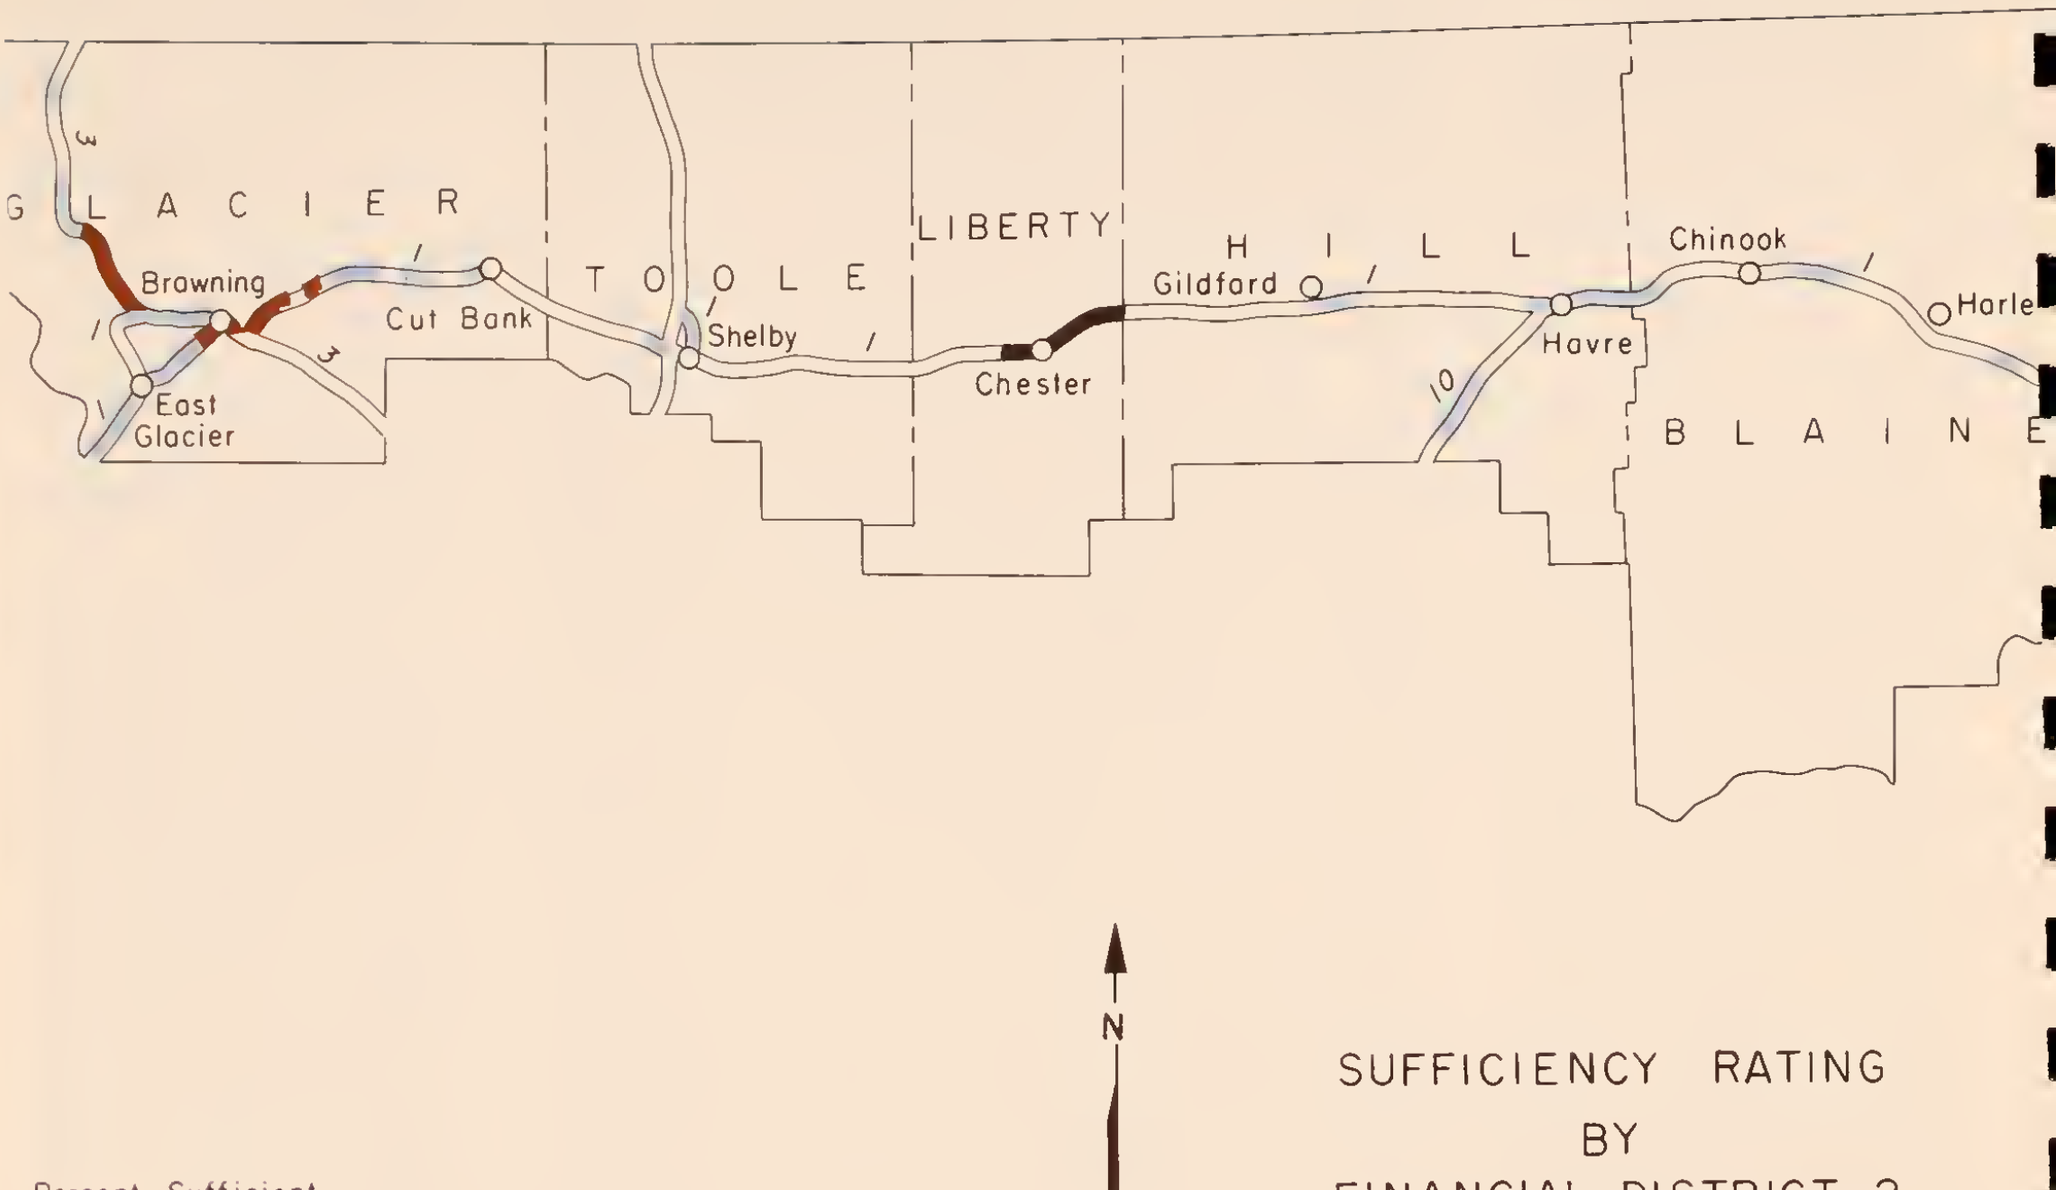

SUFFICIENCY RATING BY FINANCIAL DISTRICT 2
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 2

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SPF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ01	221+2.488	0.8 S BROWNING	GLACIER	2	32	70	1.926	22	24	RMS	2776	535	254	4	18	9	2	9	33	26	1.3
PJ01	221+1.600	BROWNING	GLACIER	2	35	53	.888	24	24	RMS	3352	653	423	3	16	9	1	7	36	27	.6
PJ01	220+0.489	1.3 W BROWNING	GLACIER	2	45	45	1.390	24	24	RMS	1762	343	278	0	13	7	2	11	33	28	.9
PJ03	430+0.315	JCT FAS RTE 445	GLACIER	2	28	40	8.213	18	24	RMS	882	171	280	0	9	4	0	21	34	34	5.4
PJ01	229+0.880	1.1 E BLACKFOOT	GLACIER	2	25	63	2.119	24	24	RMS	1309	209	478	0	12	5	1	23	41	38	1.5
PJ01	224+0.000	JCT FAP RTE 3	GLACIER	2	35	61	4.927	22	24	RMS	1447	231	324	0	12	8	3	19	42	38	2.9
PJ03	425+0.052	JCT SPUR FAP RTE 1	GLACIER	2	28	68	5.269	24	24	RMS	834	162	351	0	13	4	0	23	40	40	3.2
PJ01	211+0.317	2.1 E SPUR RTE 1	GLACIER	2	39	54	9.156	26	30	RMS	1152	220	353	0	13	8	1	21	43	41	5.2
PJ01	240+0.263	4.8 E FAS 444	GLACIER	2	27	60	6.292	24	24	RMS	1273	190	534	0	12	4	3	25	44	41	3.5
PJ01	233+0.191	4.4 E BLACKFOOT	GLACIER	2	25	61	7.073	24	24	RMS	1288	206	805	0	10	7	3	26	46	43	3.8
PJ01	247+0.019	7.7 W OF CUT BANK	GLACIER	2	27	61	4.950	24	24	RMS	1376	206	534	0	15	6	2	24	47	44	2.6
PJC1	379+0.167	JCT FAP RTE 10	HILL	2	52	52	1.516	40	40	PMS	3709	396	654	0	13	10	10	21	54	44	.7
PJ01	679+0.899	SHELBY LIMITS	TOOLE	2	28	52	1.040	20	24	RMS	1063	138	266	0	15	7	1	22	45	44	.6
PJ01	210+0.124	0.9 E SPUR RTE 1	GLACIER	2	43	62	1.211	26	30	RMS	1160	221	353	0	16	9	1	21	47	45	.6
PJ03	416+0.397	3.5 W BROWNING	GLACIER	2	35	51	6.368	22	24	RMS	781	152	452	0	10	8	1	25	44	45	3.6
PJC3	413+0.039	JCT FAP RTE 1	GLACIER	2	35	51	3.371	22	24	RMS	1096	213	854	0	10	8	5	26	49	47	1.7
PJC3	422+0.786	9.9 W BROWNING	GLACIER	2	29	35	2.247	20	24	PMS	701	136	556	0	10	8	1	26	45	47	1.2
PJ01	254+0.122	0.6 W OF CUT BANK	GLACIER	2	55	55	.402	42	42	PMS	2220	266	335	5	17	10	4	18	54	47	.2
PJ01	435+0.143	5.8 E FAS 376	BLAINE	2	25	71	4.666	22	24	RMS	1033	134	324	3	17	4	1	24	49	48	2.4
PJ10	97+0.042	7.6 N HILL CO	HILL	2	28	53	7.369	22	24	RMS	1211	157	510	0	12	7	8	25	52	50	3.5
PJ01	278+0.459	JCT FAI 15	TOOLE	2	60	60	.350	68	68	PMS	3579	501	3400	3	13	10	7	28	61	51	.1
PJ01	678+0.975	KIOWA JCT	GLACIER	2	29	72	.208	20	20	PMS	306	61	377	0	10	4	1	28	43	51	.1
PJ01	413+0.431	0.4 E ZURICH	BLAINE	2	49	56	.591	32	32	PMS	1614	209	629	5	18	10	1	25	59	55	.2
PJ01	429+0.077	0.6 E FAS 376	BLAINE	2	36	62	5.241	28	30	PMS	1059	137	453	5	14	10	2	25	56	55	2.3
PJC1	204+0.366	6.4 E GLACIER CO	GLACIER	2	63	63	4.884	32	32	PMS	997	190	441	4	15	10	4	24	57	56	2.1
PJ03	452+0.819	BABB	GLACIER	2	56	56	3.787	24	28	RMS	971	189	523	3	17	9	3	25	57	56	1.6
PJ01	197+0.816	GLACIER CO LINE	GLACIER	2	52	70	6.390	26	26	PMS	866	165	264	5	19	10	2	21	57	57	2.7
PJC1	354+0.598	1.0 E GILDFORD	HILL	2	36	59	8.956	26	31	PMS	973	126	489	5	17	10	1	26	59	58	3.7
PJ01	391+0.007	BLAINE CO	BLAINE	2	46	54	2.849	24	31	PMS	2076	269	600	5	18	10	8	23	64	58	1.0
PJ01	383+0.799	HAVRE	HILL	2	46	54	7.206	24	30	PMS	2255	293	655	7	21	10	4	23	65	59	2.5
PJ01	209+0.252	JCT SPUR RTE 1	GLACIER	2	63	63	.874	32	32	PMS	1161	221	478	6	21	10	1	23	61	59	.3
PJ01	278+0.091	0.4 W FAI 15	TOOLE	2	60	60	.368	68	68	PMS	1372	205	3400	4	16	10	4	29	63	60	.1
PJC1	408+0.325	4.2 E CHINOOK	BLAINE	2	40	56	5.091	28	30	PMS	1665	216	612	6	16	10	7	25	64	60	1.8
PJ03	438+0.515	8.2 N FAS 445	GLACIER	2	58	64	6.011	44	44	PMS	1031	201	273	7	23	10	2	19	61	60	2.3
PJ10	90+0.926	1.5 N HILL CO	HILL	2	30	73	6.098	22	26	PMS	1058	137	535	4	17	7	7	26	61	60	2.4
PJ01	308+0.048	1.0 E LIBERTY CO	LIBERTY	2	47	60	7.280	26	26	RMS	789	102	442	5	17	10	2	27	61	62	2.6
PJC1	439+1.027	6.4 W PHILLIPS CO	BLAINE	2	35	71	6.447	24	24	BST	1012	131	469	3	18	6	11	26	64	63	2.3
PJ01	246+0.564	11.1 E FAS 444	GLACIER	2	61	61	.492	32	35	RMS	1264	189	680	5	14	10	10	26	65	63	.2
PJC1	421+0.341	3.4 W HAPLEM	BLAINE	2	39	62	2.572	26	31	RMS	1476	191	612	6	16	10	10	25	67	64	.8
PJ01	372+0.142	8.6 E KREMLIN	HILL	2	60	60	7.002	32	32	PMS	1998	259	696	4	18	10	13	24	69	64	2.2
PJC1	404+0.087	CHINOOK	BLAINE	2	44	56	4.248	28	30	PMS	1924	250	663	6	17	10	12	24	69	64	1.3
PJ01	278+0.809	0.3 E FAI 15	TOOLE	2	56	56	.440	60	60	PMS	3579	501	1700	3	14	9	20	26	72	64	.1
PJ03	400+0.021	9.2 S FAP RTE 1	GLACIER	2	51	51	2.132	26	28	RMS	677	163	454	5	17	10	5	25	62	64	.8
PJC1	363+0.532	KREMLIN FAS 450	HILL	2	36	70	8.591	28	32	PMS	1228	159	696	7	18	10	5	27	67	65	2.6
PJ01	251+0.988	2.7 W OF CUT BANK	GLACIER	2	72	72	2.128	50	50	PMS	1685	252	272	10	30	10	3	16	69	65	.7
PJ01	231+0.966	3.2 E BLACKFOOT	GLACIER	2	50	63	1.203	24	30	PMS	1306	208	530	6	17	10	12	24	69	66	.4
PJC1	315+0.301	6.5 W CHESTER	LIBERTY	2	47	60	5.785	26	26	RMS	796	103	500	7	18	10	4	27	66	67	2.0
PJ01	393+0.855	2.8 E BLAINE CO	BLAINE	2	38	59	9.717	24	30	RMS	2154	280	663	5	18	10	15	24	72	67	2.7
PJ10	109+0.571	1.8 S FAP 1	HILL	2	52	52	1.796	32	32	PMS	1460	189	580	5	18	10	12	25	70	67	.5
PJ01	254+0.578	CUT BANK	GLACIER	2	55	55	.229	42	42	PMS	3033	363	817	5	17	10	20	23	75	68	.1
PJC1	307+0.040	LIBERTY CO	LIBERTY	2	57	62	.983	32	32	PMS	816	106	629	4	17	10	10	27	68	68	.3
PJC1	424+0.712	HARLEM	BLAINE	2	68	68	4.358	40	40	PMS	1770	230	281	10	27	10	8	18	73	69	1.2
PJ03	448+0.813	4.3 N ST MARYS	GLACIER	2	56	64	4.001	32	32	PMS	1064	207	630	8	24	10	3	25	70	69	1.2
PJ03	444+0.544	ST MARYS	GLACIER	2	64	64	4.280	32	32	PMS	1163	226	597	8	24	10	5	24	71	69	1.2
PJ03	402+0.250	7.1 S FAP RTE 1	GLACIER	2	60	60	7.233	32	32	PMS	700	168	529	5	21	10	9	25	70	71	2.2

FINANCIAL DISTRICT NUMBER 2

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	ADT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJC1	271+0.001	7.6 E TOOLE CO	TOOLE	2	58	66	7.061	32	32	RMS	1315	197	503	4	17	10	18	24	73	71	1.9
PJ01	670+0.214	2.8 N EAST GLAC	GLACIER	2	29	72	8.761	24	24	PMS	331	66	728	6	25	5	0	29	65	71	3.1
PJC1	667+0.454	JCT FAP 1 E GLAC	GLACIER	2	29	72	2.267	24	24	PMS	580	117	728	7	28	5	1	28	69	72	.7
PJ01	223+0.702	1.9 E FAP 3	GLACIER	2	60	60	.184	32	32	PMS	2215	423	464	8	23	10	20	16	77	72	
PJ01	256+0.020	CUT BANK	GLACIER	2	67	67	6.809	40	40	PMS	1495	224	244	7	22	10	20	16	75	72	1.7
PJC1	332+0.684	HILL CO	HILL	2	71	71	9.281	40	40	PMS	960	124	244	9	28	10	4	22	73	72	2.5
PJ01	228+0.797	BLACKFOOT	GLACIER	2	57	57	1.050	24	32	RMS	1311	209	680	4	16	10	20	25	75	73	.3
PJ03	436+0.621	3.8 N BABB	GLACIER	2	61	61	.866	28	28	PMS	831	162	554	7	22	10	9	26	74	74	.2
PJ01	280+0.100	SHELBY	TOOLE	2	54	59	11.649	32	32	PMS	1223	158	569	3	18	10	20	26	77	75	2.7
PJC1	299+0.766	7.3 W LIBERTY CO	TOOLE	2	57	62	7.266	32	32	PMS	831	108	569	2	18	10	20	27	77	77	1.7
PJC1	291+0.748	6.8 E FAS 417	TOOLE	2	56	59	8.023	32	32	PMS	911	118	599	3	18	10	20	27	78	78	1.8
PJ03	457+0.487	4.7 N BABB	GLACIER	2	52	52	5.856	22	28	PMS	481	93	500	3	15	10	20	27	75	78	1.5
PJ01	262+0.815	TOOLE CO	TOOLE	2	67	67	.272	40	40	PMS	1134	170	296	7	22	10	20	21	80	79	.1
PJC3	394+0.089	5.9 N GLACIER CO	GLACIER	2	66	66	5.926	34	34	PMS	661	159	504	10	28	10	7	25	80	81	1.2
PJ01	423+0.924	0.8 W HARLEM	BLAINE	2	68	68	.797	40	40	PMS	1794	233	281	9	28	10	20	18	85	82	.1
PJ10	104+0.365	6.9 S FAP 1	HILL	2	67	67	5.125	40	40	PMS	1561	202	320	9	24	10	20	21	84	82	.8
PJ10	89+0.607	0.2 N HILL CO	HILL	2	70	70	1.319	32	32	PMS	1137	147	720	9	28	10	9	27	83	82	.2
PJ01	348+0.215	HINGHAM	HILL	2	60	60	6.381	32	32	PMS	969	125	621	8	22	10	18	27	85	84	1.0
PJC1	341+0.907	RUDYARD FAS 231	HILL	2	60	60	5.813	32	32	PMS	1223	158	666	8	23	10	19	26	86	85	.6
PJ01	669+0.592	2.2 N EAST GLAC	GLACIER	2	29	72	.622	24	24	PMS	491	99	611	8	28	10	12	28	86	88	.1
PJ01	263+0.107	0.3 E TOOLE CO	TOOLE	2	65	65	7.491	32	32	PMS	1187	178	666	10	24	10	19	26	89	88	.8
PJ10	89+0.418	HILL CO	HILL	2	30	70	.189	30	30	RMS	1116	145	702	8	25	10	20	27	90	89	
PJ03	388+0.220	GLACIER CO	GLACIER	2	68	68	5.858	34	38	PMS	642	154	529	10	27	10	17	26	90	91	.6
PJ01	414+0.015	1.0 E ZURICH	BLAINE	2	56	73	7.314	32	32	PMS	1501	195	666	9	30	10	20	26	95	94	.4
PJ01	322+0.605	CHESTER	LIBERTY	2			3.787	UNDER CONSTRUCTION													
PJ01	321+0.077	0.6 W CHESTER	LIBERTY	2			.700	UNDER CONSTRUCTION													
PJC1	326+0.441	3.8 E CHESTER	LIBERTY	2			6.154	UNDER CONSTRUCTION													
		DISTRICT TOTAL					347.075													34	118.3

N

SUFFICIENCY RATING BY FINANCIAL DISTRICT 3
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 3

FT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS---- END	SRF	ORN	SAF	CAP	TOT	ADJ	DEF MIL
PJ01	541+0.0??	0.3 W GLASGOW	VALLEY	3	48	48	.328	24	26	RMS	5839	788	638	0	15	8	20	11	54	40	.
PJ42	72+0.246	JCT FAS RTE 247	VALLEY	3	34	58	2.174	22	26	RMS	1302	208	367	0	13	9	2	21	45	42	1.
PJ25	46+0.499	ROOSEVELT CO	ROOSEVELT	3	30	56	.412	20	24	RMS	983	127	220	0	12	10	2	21	45	44	.
PJ01	537+0.631	3.7 W GLASGOW	VALLEY	3	48	48	3.338	24	26	RMS	2156	291	695	0	10	10	7	24	51	44	1.
PJ25	46+0.911	JCT FAP 32	ROOSEVELT	3	30	56	5.474	24	24	RMS	1015	131	371	0	12	7	2	25	46	45	3.
PJ42	59+0.181	2.9 N VALLEY CO	VALLEY	3	34	34	11.343	22	26	RMS	635	101	324	0	12	7	1	25	45	47	6.
PJ22	90+0.037	0.5 S CULBERTSON	ROOSEVELT	3	33	58	1.859	20	24	RMS	583	87	311	0	9	7	2	26	44	47	1.
PJ22	43+0.283	JCT FAP 30	SHERIDAN	3	33	36	9.226	20	24	RMS	953	142	352	0	14	9	2	24	49	48	4.
PJ42	70+0.530	2.7 S FAS 247	VALLEY	3	34	34	2.725	22	26	RMS	826	132	442	0	11	9	2	26	48	48	1.
PJ16	309+0.524	JCT FAS RTE 363	PHILLIPS	3	38	42	1.399	24	26	RMS	979	164	416	0	14	8	5	24	51	50	.
PJ01	629+0.422	3.2 E BROCKTON	ROOSEVELT	3	46	50	5.368	24	32	RMS	674	87	268	0	12	9	2	25	48	50	2.
PJ22	7+0.586	7.1 E SCOBEY	DANIELS	3	35	36	10.261	20	24	BST	412	61	184	0	12	8	1	25	46	51	5.
PJ32	48+0.193	2.6 S SCOBEY	DANIELS	3	33	35	2.587	20	24	BST	445	62	203	0	12	8	1	25	46	51	1.
PJ32	39+0.868	4.7 N DANIELS CO	DANIELS	3	33	35	4.599	20	24	BST	307	42	203	0	11	5	1	27	44	52	2.
PJ22	42+0.348	PLENTYWOOD	SHERIDAN	3	33	36	1.033	20	24	RMS	1838	275	564	0	14	10	10	23	57	52	.
PJ01	526+0.524	14.1 W GLASGOW	VALLEY	3	50	55	11.121	24	27	PMS	1070	144	277	3	16	10	2	22	53	52	5.
PJ01	626+0.151	BROCKTON	ROOSEVELT	3	43	57	3.243	24	30	RMS	761	98	367	0	13	10	3	26	52	53	1.
PJ22	29+0.335	ARCHER FAS 374	SHERIDAN	3	37	37	11.850	20	24	RMS	606	90	406	0	11	9	3	27	50	53	5.
PJ32	7+0.507	3.8 N FAP 1	ROOSEVELT	3	33	36	6.626	20	24	BST	409	57	357	0	10	9	1	28	48	54	3.
PJ32	3+0.751	JCT FAP RTE 1	ROOSEVELT	3	33	36	3.750	20	24	BST	528	73	372	0	12	9	3	27	51	55	1.
PJ30	0+0.000	JCT FAP RTE 22	SHERIDAN	3	38	40	10.149	20	24	RMS	412	57	290	0	12	7	3	27	49	55	5.
PJ32	28+0.175	7.0 S DANIELS CO	ROOSEVELT	3	33	35	7.041	20	24	BST	270	37	357	0	10	7	2	28	47	56	3.
PJ22	17+0.900	SHERIDAN CO	SHERIDAN	3	36	36	3.028	22	25	BST	312	46	249	0	12	8	2	27	49	57	1.
PJ01	454+0.550	ODDSON	PHILLIPS	3	49	49	3.137	24	26	RMS	1077	140	539	3	14	8	7	26	58	57	1.
PJ30	20+0.630	JCT FAS RTE 516	SHERIDAN	3	40	40	2.757	20	24	RMS	339	47	315	0	13	8	2	28	51	58	1.
PJ32	35+0.227	DANIELS CO	DANIELS	3	33	35	4.667	20	24	BST	289	40	185	0	13	8	2	27	50	58	2.
PJ22	14+0.125	10.0 N JCT FAP 1	ROOSEVELT	3	33	36	9.277	20	24	BST	318	44	203	0	17	7	1	27	52	59	4.
PJ01	521+0.454	20.0 E VALLEY CO	VALLEY	3	50	55	5.117	24	27	PMS	988	133	413	3	18	10	4	25	60	59	2.
PJ01	543+0.809	JCT FAS RTE 247	VALLEY	3	62	62	2.430	36	36	PMS	1606	216	616	5	19	10	4	25	63	59	.
PJ16	301+0.379	8.1 S FAS 363	PHILLIPS	3	38	42	8.114	24	26	RMS	314	52	355	0	12	8	4	28	52	59	3.
PJ32	23+0.431	11.8 S DANIELS CO	ROOSEVELT	3	33	36	4.759	20	24	BST	259	36	220	0	14	8	1	28	51	60	2.
PJ30	10+0.100	10.1 N JCT RTE 22	SHERIDAN	3	40	40	10.490	20	24	RMS	277	38	290	0	14	8	2	28	52	60	5.
PJ16	278+0.473	6.3 N INO RES	PHILLIPS	3	47	47	5.924	25	25	BST	182	30	515	0	8	8	5	29	50	61	3.
PJ01	499+1.054	SACO	PHILLIPS	3	55	55	1.515	24	28	RMS	1132	152	510	0	12	10	15	26	63	61	.
PJ01	634+0.794	8.6 E BROCKTON	ROOSEVELT	3	52	52	3.299	24	30	RMS	725	94	367	0	13	10	11	26	60	61	1.
PJ16	284+0.393	12.2 N INO RES	PHILLIPS	3	42	42	6.398	20	24	RMS	190	31	634	0	10	8	4	29	51	62	3.
PJ22	20+0.923	3.0 E SHERIDAN CO	SHERIDAN	3	36	36	8.441	22	25	BST	347	52	435	0	14	9	4	28	55	62	3.
PJ32	44+0.481	9.3 N DANIELS CO	DANIELS	3	33	35	3.711	20	24	BST	342	47	372	0	12	8	7	28	55	62	3.
PJ16	242+0.067	PHILLIPS CO	PHILLIPS	3	60	60	5.581	28	28	PMS	325	54	477	0	11	10	7	28	56	63	1.
PJ01	546+0.252	2.4 E FAS 247	VALLEY	3	53	53	8.404	24	30	RMS	1330	179	631	0	15	10	15	26	66	63	2.
PJ01	639+0.785	4.3 W CULBERTSON	ROOSEVELT	3	52	52	2.725	24	30	RMS	766	99	367	0	12	10	14	26	62	63	1.
PJ01	638+0.084	6.0 W CULBERTSON	ROOSEVELT	3	52	52	1.723	24	30	RMS	751	97	612	0	14	10	11	28	63	64	.
PJ16	296+0.098	13.6 S FAS 363	PHILLIPS	3	42	61	5.278	22	24	RMS	225	37	243	0	15	9	2	28	54	64	2.
POC1	515+0.618	14.2 E VALLEY CO	VALLEY	3	50	55	5.795	24	27	PMS	1017	137	461	5	18	10	8	26	67	66	1.
PJ01	542+0.429	GLASGOW	VALLEY	3	62	62	1.386	68	68	PMS	3093	417	2088	6	24	10	6	27	73	66	.
PJ01	642+0.523	1.7 W CULBERTSON	ROOSEVELT	3	56	61	1.712	32	32	PMS	971	126	380	0	13	10	20	25	68	67	.
PJ01	601+0.789	4.6 E FAP 32	ROOSEVELT	3	60	60	9.761	32	32	PMS	1452	174	680	6	20	10	9	26	71	68	2.
PJ22	89+0.524	CULBERTSON	ROOSEVELT	3	61	61	.496	36	36	PMS	626	93	560	7	16	10	5	28	66	68	.
PJ01	573+0.032	FRAZER	VALLEY	3	58	61	8.057	24	32	PMS	1068	144	680	0	13	10	20	27	70	69	2.
POC1	591+0.423	WOLF POINT	ROOSEVELT	3	58	58	5.798	32	32	PMS	1941	232	648	7	20	10	12	25	74	69	1.
PJ01	581+0.089	ROOSEVELT CO	ROOSEVELT	3	57	61	9.308	32	32	PMS	1342	181	616	3	17	10	17	26	73	70	2.
PJ01	661+0.539	5.6 W N D LINE	ROOSEVELT	3	55	62	5.604	32	32	PMS	791	106	352	8	19	10	7	25	69	70	1.
PJ01	656+0.309	10.8 W N D LINE	ROOSEVELT	3	55	62	5.246	32	32	PMS	751	101	536	8	19	10	5	27	69	70	1.
PJ32	0+0.000	JCT FAP RTE 25	ROOSEVELT	3	33	36	3.765	20	24	BST	319	44	584	0	9	10	15	29	63	70	1.
POC1	457+0.675	3.1 E ODDSON	PHILLIPS	3	63	63	9.025	32	32	PMS	1071	139	616	5	20	10	10	27	72	71	2.

FINANCIAL DISTRICT NUMBER 3

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	CRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJC1	564+0.858	8.8 E NASHUA	VALLEY	3	61	61	8.184	32	32	PMS	1144	154	720	6	23	10	7	27	73	71	2.2
PJ01	501+0.410	VALLEY CO	VALLEY	3	55	55	6.588	24	28	RMS	1059	142	435	0	18	9	20	25	72	71	1.8
PJ16	272+0.176	FT BEL INO RES	PHILLIPS	3	49	49	6.252	22	22	BST	177	29	417	C	10	7	14	29	60	71	2.5
PJ01	466+0.722	12.1 E DODSON	PHILLIPS	3	53	53	4.948	24	30	RMS	1384	179	600	2	17	10	20	26	75	72	1.2
PJ16	247+0.534	5.6 N PHILLIPS CO	PHILLIPS	3	60	60	9.711	28	28	PMS	319	53	902	0	10	10	18	29	67	73	3.2
PJ22	81+0.351	5.5 S FROID	ROOSEVELT	3	59	59	7.156	32	32	PMS	726	108	456	2	14	10	20	26	72	73	2.0
PJ01	597+0.243	JCT FAP RTE 32	ROOSEVELT	3	58	58	4.565	32	32	PMS	1496	179	648	6	18	10	18	26	78	75	1.0
PJ01	556+0.131	NASHUA	VALLEY	3	56	70	8.685	32	32	PMS	1183	159	696	7	23	10	10	27	77	75	2.0
PJ16	264+0.333	8.1 N FAS 376	PHILLIPS	3	57	59	7.800	24	29	PMS	179	30	353	2	16	10	8	29	65	76	2.7
PJ16	290+0.795	18.9 S FAS 363	PHILLIPS	3	42	61	5.281	22	24	RMS	207	34	711	0	10	8	20	29	67	76	1.7
PJ01	508+0.040	6.6 E VALLEY CO	VALLEY	3	66	66	7.595	40	40	PMS	1080	145	260	6	23	10	17	22	78	77	1.7
PJ01	611+0.926	POPLAR	ROOSEVELT	3	70	70	13.687	40	40	PMS	1244	161	281	7	23	10	20	21	81	79	2.6
PJ01	554+0.658	0.5 W NASHUA	VALLEY	3	56	70	.526	32	32	PMS	1233	166	544	5	26	10	11	25	81	79	.1
PJ01	489+0.049	9.9 W SACO	PHILLIPS	3	67	67	9.965	40	40	PMS	1064	143	234	8	24	10	17	21	80	79	2.0
PJ01	644+1.008	CULBERTSON	ROOSEVELT	3	56	61	3.010	32	32	PMS	950	128	629	7	17	10	20	27	81	80	.6
PJ01	648+0.067	3.0 E CULBERTSON	ROOSEVELT	3	61	61	8.291	32	32	PMS	757	102	629	5	16	10	20	28	79	80	1.7
PJ01	481+0.373	9.0 E MALTA	PHILLIPS	3	67	67	7.671	40	40	PMS	1080	140	247	8	25	10	17	21	81	80	1.5
PJ32	60+0.935	9.2 N SCOBEY	DANIELS	3	45	71	4.885	24	24	BST	72	10	333	4	17	10	2	30	63	80	1.8
PJ32	51+0.737	SCOBEY	DANIELS	3	58	68	9.190	24	26	PMS	195	27	456	9	24	10	2	29	74	82	2.4
PJ01	472+0.410	MALTA	PHILLIPS	3	67	67	8.975	40	40	PMS	1305	169	234	9	26	10	20	19	84	82	1.4
PJ16	260+0.891	4.6 N FAS 376	PHILLIPS	3	57	59	3.479	24	29	PMS	218	36	558	2	16	10	17	29	74	82	.9
PJ16	257+0.224	C.9 N FAS 376	PHILLIPS	3	57	59	3.664	24	29	PMS	250	42	531	0	16	10	20	29	75	82	.9
PJ22	52+0.606	9.2 S JCT FAP 30	SHERIDAN	3	63	63	11.140	32	32	PMS	689	103	672	6	21	10	17	28	82	83	2.0
PJ22	75+0.881	FROID	ROOSEVELT	3	71	71	5.469	32	32	PMS	665	99	640	10	24	15	12	28	84	85	.9
PJC1	446+0.310	PHILLIPS CO	PHILLIPS	3	73	73	7.360	40	40	PMS	1025	133	281	8	27	10	20	23	88	87	.9
PJ42	56+0.288	VALLEY CO	VALLEY	3	36	66	2.893	30	36	RMS	245	39	592	5	27	10	8	29	83	88	.5
PJ22	63+0.803	JCT FAS 515	SHERIDAN	3	63	63	.265	32	32	PMS	603	90	896	7	23	10	20	28	88	89	
PJ22	0+0.523	SCOBEY	DANIELS	3	65	65	7.070	32	32	PMS	580	87	672	8	23	10	20	28	89	90	.8
PJ01	555+0.899	NASHUA	VALLEY	3	56	70	.095	32	32	PMS	1329	179	528	9	27	10	20	25	91	90	
PJ22	73+0.876	2.0 S ROOSEVELT CO	ROOSEVELT	3	71	71	1.992	32	32	PMS	606	90	576	10	25	10	20	28	93	93	.1
PJ22	71+0.860	ROOSEVELT CO	POOSEVELT	3			2.018	UNDER CONSTRUCTION													
PJ22	64+0.348	MEDICINE LAKE	SHERIDAN	3			7.508	UNDER CONSTRUCTION													
		DISTRICT TOTAL					484.552													35	170.4

N

SUFFICIENCY RATING BY FINANCIAL DISTRICT 4
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 4

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ22	121+0.331	3.6 N SIDNEY	RICHLAND	4	37	49	3.663	24	26	RMS	2019	302	277	0	11	9	3	14	37	31	2.3
PJ20	58+0.614	6.1 N SIDNEY	RICHLAND	4	35	35	3.906	20	24	RMS	1612	209	280	0	11	5	2	19	37	33	2.5
PJ20	52+0.570	SIDNEY	RICHLAND	4	35	35	6.066	20	24	RMS	2444	317	421	0	11	5	5	19	40	33	3.6
PJ25	44+0.762	1.8 S ROOSEVELT	MCCONE	4	30	30	1.745	20	24	BST	780	101	126	0	13	6	1	18	38	39	1.1
PJ20	32+0.967	1.0 N SAVAGE	RICHLAND	4	34	57	9.055	20	24	RMS	1296	168	377	0	12	8	3	23	46	43	4.9
PJ25	7+0.759	7.6 N CIRCLE	MCCONE	4	36	55	13.141	20	25	RMS	567	73	168	0	13	6	1	23	43	46	7.5
PJ25	0+0.055	CIRCLE	MCCONE	4	36	56	7.000	20	24	RMS	585	76	315	0	8	8	1	26	43	46	4.3
PJ22	108+0.288	4.6 N FAS 201	RICHLAND	4	40	49	4.649	24	26	RMS	685	102	448	0	8	8	3	27	46	48	2.5
PJ26	0+0.000	JCT FAP RTE 20	RICHLAND	4	36	36	.771	22	25	BST	977	127	448	0	13	10	1	26	50	49	.4
PJ25	28+0.107	4.2 N FAS 254	MCCONE	4	40	40	7.404	20	24	RMS	582	75	357	0	10	7	3	27	47	50	3.9
PJ26	0+0.771	0.8 E JCT FAP 20	RICHLAND	4	33	55	6.762	20	24	RMS	361	46	480	0	8	5	2	29	44	50	3.8
PJ25	20+0.909	20.7 N CIRCLE	MCCONE	4	35	40	7.203	20	24	RMS	583	75	392	0	10	7	4	27	48	51	3.7
PJ22	112+0.961	JCT FAS 201	RICHLAND	4	40	49	4.749	24	26	RMS	820	123	277	2	17	8	3	23	53	53	2.2
PJ22	91+0.986	RICHLAND CO	RICHLAND	4	34	36	1.650	20	24	BST	551	82	515	0	8	10	4	28	50	53	.8
PJ25	35+0.506	11.0S ROOSEVELT CO	MCCONE	4	37	37	9.233	20	25	RMS	612	79	185	0	18	6	3	24	51	54	4.5
PJ15	369+0.000	0.3 W GLENDIVE	DAWSON	4	48	50	.222	24	34	PMS	3575	429	336	6	19	8	20	11	64	55	.1
PJ15	267+0.492	JCT FAS RTE 253	MCCONE	4	41	56	10.951	24	25	RMS	470	71	312	0	11	10	2	27	50	55	5.5
PJ22	117+0.721	4.7 S JCT FAS 201	RICHLAND	4	38	49	3.628	24	26	RMS	943	141	387	2	17	8	6	25	58	57	1.5
PJ20	18+0.596	4.2 S RICHLAND CO	DAWSON	4	54	54	4.170	28	28	RMS	884	114	434	0	14	10	6	26	58	58	1.8
PJ15	262+0.332	13.9 E FAP 42	MCCONE	4	47	47	5.189	24	24	BST	343	52	289	0	13	8	3	27	51	58	2.5
PJ15	248+0.632	JCT FAP 42	MCCONE	4	40	54	8.009	24	24	RMS	323	49	243	0	13	9	2	27	51	58	3.9
PJ15	256+0.590	8.0 E FAP 42	MCCONE	4	40	54	5.801	24	24	RMS	331	50	266	0	15	9	1	27	52	59	2.8
PJ20	23+0.110	RICHLAND CO	RICHLAND	4	54	54	5.787	28	28	RMS	1041	135	301	2	17	10	10	23	62	61	2.2
PJ22	100+0.176	8.3 S RICHLAND CO	RICHLAND	4	40	49	8.091	24	26	BST	559	83	448	0	8	8	16	27	59	62	3.3
PJ17	31+0.365	4.0 W TERRY	PRAIRIE	4	31	57	4.030	24	30	RMS	157	20	530	0	14	6	1	29	50	63	2.0
PJ20	63+0.923	FAIRVIEW	RICHLAND	4	56	56	.349	24	32	PMS	1400	182	828	8	21	10	1	27	67	64	.1
PJ42	46+0.037	10.2 S VALLEY CO	MCCONE	4	57	64	6.173	24	32	BST	148	23	571	0	8	10	5	29	52	65	3.0
PJ17	38+0.695	2.1 E TERRY	PRAIRIE	4	31	49	5.120	24	24	RMS	85	12	312	0	14	5	1	29	49	66	2.6
PJ15	316+0.710	12.0 E FAS 470	DAWSON	4	61	61	8.026	32	32	PMS	961	124	629	4	17	10	10	27	68	67	2.6
PJ22	93+0.586	1.7 S RICHLAND CO	RICHLAND	4	37	41	3.258	24	26	BST	544	81	470	0	10	7	20	27	64	67	1.2
PJ20	13+0.047	11.3 N GLENDIVE	DAWSON	4	69	69	5.607	40	40	PMS	855	111	184	7	25	10	6	21	69	69	1.7
PJ15	279+0.794	CIRCLE	MCCONE	4	66	66	1.016	32	32	PMS	1411	215	592	8	25	10	4	25	72	69	.3
PJ51	38+0.441	5.8 E RICHLAND CO	RICHLAND	4	57	57	10.781	26	30	BST	222	31	565	0	12	10	8	29	59	69	4.4
PJ20	31+0.497	SAVAGE	RICHLAND	4	74	74	1.484	40	40	PMS	1309	170	266	10	30	10	2	20	72	70	.4
PJ20	50+0.012	JCT FAP RTES 26 51	RICHLAND	4	73	73	1.750	88	88	PMS	3539	460	1760	9	28	10	6	26	79	72	.4
PJ15	369+0.222	0.5 W GLENDIVE	DAWSON	4	69	69	.126	32	32	PMS	3575	429	432	9	26	10	20	15	80	73	
PJ42	31+0.776	29.8 N MCCONE CO	MCCONE	4	56	64	5.463	24	34	BST	118	18	380	0	14	10	7	29	60	74	2.2
PJ51	32+0.582	RICHLAND CO	RICHLAND	4	58	58	5.840	28	32	BST	201	28	428	0	13	10	13	29	65	75	2.0
PJ51	9+0.094	0.8 E DAWSON CO	DAWSON	4	59	59	9.669	28	28	PMS	194	27	371	4	17	10	5	29	65	75	3.4
PJ17	43+0.815	7.2 E TERRY	PRAIRIE	4	49	49	1.041	24	32	RMS	80	10	616	5	16	8	0	30	59	76	.4
PJ51	18+0.776	10.5 E DAWSON CO	DAWSON	4	59	59	8.456	28	28	PMS	195	27	342	3	18	10	7	29	67	77	2.8
PJ42	8+0.299	6.3 N MCCONE CO	MCCONE	4	63	64	11.418	24	42	BST	118	18	627	0	8	10	15	30	63	77	4.2
PJ51	49+0.250	LAMBERT	RICHLAND	4	56	56	10.645	25	25	BST	307	42	400	0	15	10	19	28	72	78	3.0
PJ51	64+0.382	6.7 W FAP 20	RICHLAND	4	55	55	6.760	25	25	BST	516	72	508	3	17	10	17	28	75	78	1.7
PJ20	42+0.055	7.9 S FA RTE 51	RICHLAND	4	73	73	7.955	40	40	PMS	1601	208	281	10	30	10	13	19	82	79	1.4
PJ20	28+0.894	5.8 N RICHLAND CO	RICHLAND	4	75	75	2.598	40	40	PMS	1217	158	261	10	30	10	9	22	81	79	.5
PJ20	6+0.132	4.4 N GLENDIVE	DAWSON	4	67	67	6.856	40	40	PMS	970	126	643	8	26	10	10	27	81	80	1.3
PJ17	36+0.554	TERRY	PRAIRIE	4	31	57	1.294	24	30	RMS	110	15	951	0	11	5	20	30	66	80	.4
PJ42	1+0.983	MCCONE CO	MCCONE	4	60	64	6.310	24	40	BST	122	19	571	0	8	10	20	30	68	80	2.0
PJ27	71+0.318	7.9 S WIBAUX	WIBAUX	4	65	65	2.083	28	28	PMS	467	60	312	10	27	10	3	27	77	80	.5
PJ27	66+0.022	10.3 N FAS 413	WIBAUX	4	65	65	5.304	28	28	PMS	420	54	504	8	24	10	6	28	76	80	1.3
PJ27	73+0.386	5.7 S WIBAUX	WIBAUX	4	65	65	5.731	28	28	PMS	506	65	480	8	25	10	8	28	79	81	1.2
PJ15	368+0.630	GLENDIVE	DAWSON	4	60	60	.374	72	88	PMS	3578	429	2840	7	21	10	20	28	86	81	.1

FINANCIAL DISTRICT NUMBER 4

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH RDY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	GRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ15	369+0.348	0.6 W GLENDIVE	DAWSON	4	69	69	.279	24	24	PMS	3575	429	805	9	26	10	20	22	87	82	
PJ42	37+0.240	35.3 N MCCONE CO	MCCONE	4	57	64	8.785	24	32	BST	125	20	627	0	10	10	20	30	70	82	2.6
PJ42	52+0.226	4.0 S VALLEY CO	MCCONE	4	36	66	4.061	28	28	RMS	166	26	395	6	25	10	4	29	74	83	1.1
PJ27	54+0.746	WIBAUX CO	WIBAUX	4	65	65	11.265	28	28	PMS	336	43	522	8	24	10	7	29	78	83	2.5
PJ51	27+0.527	RICHEY	DAWSON	4	58	58	5.039	28	32	BST	235	32	580	5	18	10	14	29	76	83	1.2
PJ51	59+0.918	10.6 E LAMBERT	RICHLAND	4	55	55	4.437	25	25	BST	349	48	377	4	18	10	20	28	80	84	.9
PJ51	3+0.340	3.3 E JCT FAP 15	MCCONE	4	60	61	5.001	30	30	PMS	247	34	463	7	23	10	9	29	78	84	1.1
PJ17	29+0.626	5.6 W TERRY	PRAIRIE	4	66	66	1.561	28	28	RMS	122	15	531	8	23	10	2	30	73	84	.4
PJ15	306+0.479	2 MI E LINDSAY	DAWSON	4	67	67	10.240	40	40	PMS	766	99	296	7	23	10	20	25	85	85	1.5
PJ15	287+0.711	7.0 E FAP 51	MCCONE	4	64	64	2.137	32	32	PMS	550	71	403	7	22	10	20	27	86	87	.3
PJ51	0+0.000	JCT FAP 15	MCCONE	4	60	61	3.326	30	30	PMS	313	43	655	7	24	10	13	29	83	87	.6
PJ15	280+0.777	JCT FAP RTE 51	MCCONE	4	66	66	6.933	32	32	PMS	732	95	621	7	23	10	20	28	88	88	.8
PJ42	19+0.720	17.7 N MCCONE CO	MCCONE	4	62	71	12.052	30	30	PMS	118	18	388	5	25	10	10	29	79	89	2.5
PJ15	289+0.829	DAWSON CO	DAWSON	4	64	64	7.066	32	32	PMS	508	66	448	7	24	10	20	28	89	90	.8
PJ22	96+0.836	5.0 S RICHLAND CO	RICHLAND	4	70	70	3.328	34	34	PMS	517	77	360	8	24	10	20	27	89	90	.4
PJ17	37+0.851	1.2 E TERRY	PRAIRIE	4	55	55	.844	24	32	RMS	94	14	424	6	16	9	20	30	81	91	.2
PJ51	8+0.342	DAWSON CO	DAWSON	4	60	61	.775	30	30	PMS	207	28	702	9	25	10	20	29	93	95	.1
PJ15	296+0.861	7.1 E DAWSON CO	DAWSON	4			9.622	UNDER CONSTRUCTION													
		DISTRICT TOTAL					393.420													36	140.5

N

SUFFICIENCY RATING
BY
FINANCIAL DISTRICT 5
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 5

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	RT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	---SUFFICIENCY RATINGS--- ENO	SFF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ43	0+0.626	LEWISTOWN LIMITS	FERGUS	5	21	21	1.143	18	24	PCC	2504	325	319	0	13	7	11	15	46	38	.6
PJ15	212+0.181	JCT FAP RTE 18	GARFIELD	5	37	47	.268	22	24	RMS	1021	156	263	0	13	8	3	21	45	44	.1
PJ15	94+0.354	11.1 E LEWISTOWN	FERGUS	5	40	52	8.960	24	30	RMS	841	109	604	0	9	9	1	27	46	46	4.8
PJ15	88+0.246	5.1 E LEWISTOWN	FERGUS	5	37	56	6.022	24	30	RMS	1009	131	353	0	14	8	1	24	47	46	3.2
PJ43	1+0.761	1.1 N LEWISTOWN	FERGUS	5	50	50	7.722	24	28	RMS	1224	159	318	0	14	10	2	23	49	47	3.9
PJ15	103+0.270	20.2 E LEWISTOWN	FERGUS	5	40	54	9.667	24	32	RMS	758	115	825	0	9	9	3	28	49	50	4.9
PJ45	81+0.345	FERGUS CO	FERGUS	5	46	60	3.235	24	24	RMS	951	123	312	4	14	9	2	24	53	52	1.5
PJ15	171+0.262	8.1 W SAND SPRINGS	GARFIELD	5	47	58	8.146	24	24	PMS	280	42	438	0	8	7	1	29	45	53	4.5
PJ15	148+0.698	9.6 W GARFIELD CO	PETROLEUM	5	51	51	7.983	24	24	BST	350	53	479	0	9	8	1	28	46	53	4.3
PJ15	131+0.060	7.8 E PETROLEUM CO	PETROLEUM	5	31	58	4.553	20	24	PMS	263	40	374	0	9	7	1	28	45	54	2.5
PJ16	192+0.688	6.5 S FAP 15	FERGUS	5	41	65	4.893	24	30	RMS	619	80	367	0	13	9	2	27	51	54	2.4
PJ18	48+0.498	10.4 N GARFIELD CO	GARFIELD	5	31	53	10.476	20	24	RMS	183	23	470	0	8	5	2	29	44	55	5.9
PJ18	38+0.393	GARFIELD CO	GARFIELD	5	31	53	10.392	20	24	PMS	180	23	448	0	7	7	1	29	44	55	5.8
PJ15	206+0.822	5.3 W FA RTE 18	GARFIELD	5	36	57	5.344	22	26	RMS	335	51	240	0	13	7	1	27	48	55	2.8
PJ15	226+0.736	8.7 E FAS 341	GARFIELD	5	37	54	12.201	24	24	RMS	326	49	243	0	13	8	1	27	49	56	6.2
PJ15	123+0.198	PETROLEUM CO	PETROLEUM	5	31	58	7.790	20	24	PMS	268	41	561	0	10	4	4	29	47	56	4.1
PJ15	73+0.550	8.5 E FAP 45	FERGUS	5	47	54	3.349	24	31	PMS	1568	186	384	6	19	9	3	23	60	56	1.3
PJ15	213+0.088	JORDAN	GARFIELD	5	37	52	4.996	24	26	RMS	401	61	500	0	12	8	2	28	50	56	2.5
PJ15	199+0.094	10.5 E EDWARDS	GARFIELD	5	36	49	7.662	24	24	PMS	291	44	275	0	11	9	1	28	49	57	3.9
PJ15	364+0.400	SPUR RTE 15	FERGUS	5	49	61	1.750	24	28	RMS	818	97	469	3	15	8	4	27	57	57	.8
PJ15	218+0.066	JCT FAS RTE 341	GARFIELD	5	36	49	8.693	24	25	BST	334	51	266	0	13	8	2	27	50	57	4.3
PJ45	64+0.218	FERGUS CO	FERGUS	5	47	73	3.002	24	24	PMS	879	114	442	3	15	10	3	26	57	57	1.3
PJ15	192+0.200	3.6 E EDWARDS	GARFIELD	5	36	53	6.889	24	24	RMS	287	43	275	0	12	9	1	28	50	58	3.4
PJ15	136+0.507	WINNETT	PETROLEUM	5	31	69	1.123	22	24	PMS	379	57	416	0	11	10	3	28	52	58	.5
PJ15	112+0.962	JCT FAP RTE 16	FERGUS	5	51	51	8.723	24	24	BST	347	53	344	0	13	9	1	28	51	58	4.3
PJ15	242+0.465	3.5 E FAS 462	GARFIELD	5	38	54	6.092	24	24	RMS	310	47	243	0	14	9	1	27	51	59	3.0
PJ15	76+0.912	11.9 E FAP 45	FERGUS	5	47	54	2.367	24	31	PMS	1630	217	565	7	20	9	4	24	64	59	.9
PJ15	79+0.286	JCT SPUR FAP 15	FERGUS	5	47	54	1.761	24	31	RMS	1483	172	733	7	18	9	3	26	63	59	.7
PJ43	9+0.491	JCT FAS RTE 235	FERGUS	5	50	50	5.355	24	28	RMS	763	99	318	2	14	10	8	25	59	60	2.2
PJ15	238+0.926	JCT FAS 462 & 465	GARFIELD	5	38	54	2.537	24	24	RMS	318	48	312	0	15	9	2	28	54	61	1.2
PJ16	237+0.411	4.6 S PHILLIPS CO	FERGUS	5	60	60	4.585	28	28	PMS	321	53	749	0	9	10	6	29	54	61	2.1
PJ16	199+0.150	JCT FAP RTE 15	FERGUS	5	62	62	9.657	30	30	PMS	346	58	554	0	12	10	6	28	56	63	4.2
PJ16	187+0.803	7.2 N FERGUS CO	FERGUS	5	52	52	4.896	24	28	RMS	469	60	377	3	14	10	6	28	61	65	1.9
PJ15	83+0.164	LEWISTOWN	FERGUS	5	42	72	5.079	24	30	PMS	1148	149	415	4	19	10	9	25	67	65	1.7
PJ45	70+0.433	FERGUS CO	FERGUS	5	47	57	1.200	24	24	RMS	935	121	266	2	12	9	20	23	66	66	.4
PJ45	71+0.629	1.2 N FERGUS CO	FERGUS	5	41	70	6.838	24	24	PMS	872	113	349	7	23	10	2	25	67	67	2.3
PJ15	121+0.740	8.7 E FAP 16	FERGUS	5	29	58	1.467	18	24	RMS	309	47	369	0	9	5	20	28	62	69	.6
PJ16	180+0.604	FERGUS CO	FERGUS	5	63	63	1.119	30	30	PMS	403	52	367	7	19	10	1	28	65	70	.4
PJ15	137+0.626	1.1 E WINNETT	PETROLEUM	5	54	54	11.000	24	24	RMS	366	55	384	0	12	10	15	28	65	71	3.9
PJ43	14+0.838	JCT FAS RTE 236	FERGUS	5	63	63	10.462	28	30	PMS	305	39	414	3	14	10	8	29	64	71	3.8
PJ45	67+0.899	FERGUS CO	FERGUS	5	47	73	1.926	24	24	PMS	860	111	494	2	13	10	19	27	71	71	.6
PJ43	35+0.280	ROY	FERGUS	5	62	62	7.565	30	30	PMS	287	37	600	3	16	10	5	29	63	71	2.8
PJ43	29+0.037	FERGUS	FERGUS	5	63	63	6.226	28	30	PMS	323	41	600	5	18	10	4	29	66	73	2.1
PJ16	220+0.624	JCT FAP RTE 43	FERGUS	5	62	62	3.869	30	30	PMS	398	66	414	3	16	10	11	28	68	73	1.2
PJ16	208+0.837	9.7 N JCT FAP 15	FERGUS	5	61	61	11.832	30	30	PMS	323	54	583	0	12	10	17	29	68	74	3.8
PJ16	224+0.499	3.9 N JCT FAP 43	FERGUS	5	59	64	12.938	28	28	RMS	322	54	629	0	11	10	20	29	70	76	3.9
PJ15	66+0.987	2.0 E FAP 45	FERGUS	5	47	54	6.536	24	31	PMS	1511	179	565	6	20	9	19	25	79	76	1.4
PJ16	181+0.704	1.1 N FERGUS CO	FERGUS	5	65	65	6.059	30	30	PMS	425	55	432	7	21	10	7	28	73	77	1.6
PJ16	197+0.570	1.6 S FAP 15	FERGUS	5	62	62	1.564	32	32	PMS	728	122	569	4	18	10	20	27	79	80	.3
PJ42	0+0.000	JCT FAP RTE 15	GARFIELD	5	60	64	1.990	24	40	BST	124	19	902	0	8	10	20	30	68	80	.6
PJ18	73+0.587	14.7 N COHAGEN	GARFIELD	5	58	65	9.391	28	28	PMS	291	37	472	7	25	10	6	29	77	83	2.2
PJ15	64+0.443	FERGUS CO	FERGUS	5	71	71	.515	32	32	PMS	1438	171	621	10	30	10	10	26	86	84	.1
PJ15	241+0.448	2.5 E FAS 462	GARFIELD	5	68	68	1.022	36	36	PMS	315	48	212	8	24	10	10	27	79	84	.2
PJ16	175+0.885	PETROLEUM CO	PETROLEUM	5	63	63	4.714	30	30	PMS	425	55	576	7	21	10	16	29	83	86	.8
PJ15	161+0.578	3.1 E GARFIELD CO	GARFIELD	5	68	68	9.598	36	36	PMS	294	44	450	5	21	10	16	29	81	86	1.8

FINANCIAL DISTRICT NUMBER 5

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS RT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FND	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ43	25+0.294	10.5 N FAS 236	FERGUS	5	63	63	3.736	28	30	PMS	275	35	442	5	18	10	20	29	82	87	.7
PJ18	63+0.369	4.4 N COHAGEN	GARFIELD	5	67	67	10.222	30	30	PMS	208	27	702	7	24	10	13	29	83	69	1.7
PJ15	158+0.394	GARFIELD CO	GARFIELD	5	73	73	3.184	30	30	PMS	307	46	567	10	30	10	9	29	88	91	.4
PJ15	64+0.958	JCT FA RTE 45	FERGUS	5	71	71	2.017	32	32	PMS	1436	170	672	10	30	10	20	26	96	95	.1
PJ15	180+0.286	SAND SPRINGS	GARFIELD	5	73	73	11.848	32	32	PMS	273	41	400	9	28	10	20	28	95	96	.6
PJ15	156+0.721	1.6 W GARFIELD CO	PETROLEUM	5	73	73	1.663	30	30	PMS	310	47	567	10	30	10	17	29	96	97	.1
PJ18	58+0.973	COHAGEN	GARFIELD	5			4.360	UNDER CONSTRUCTION													
		DISTRICT TOTAL					352.174													39	135.7

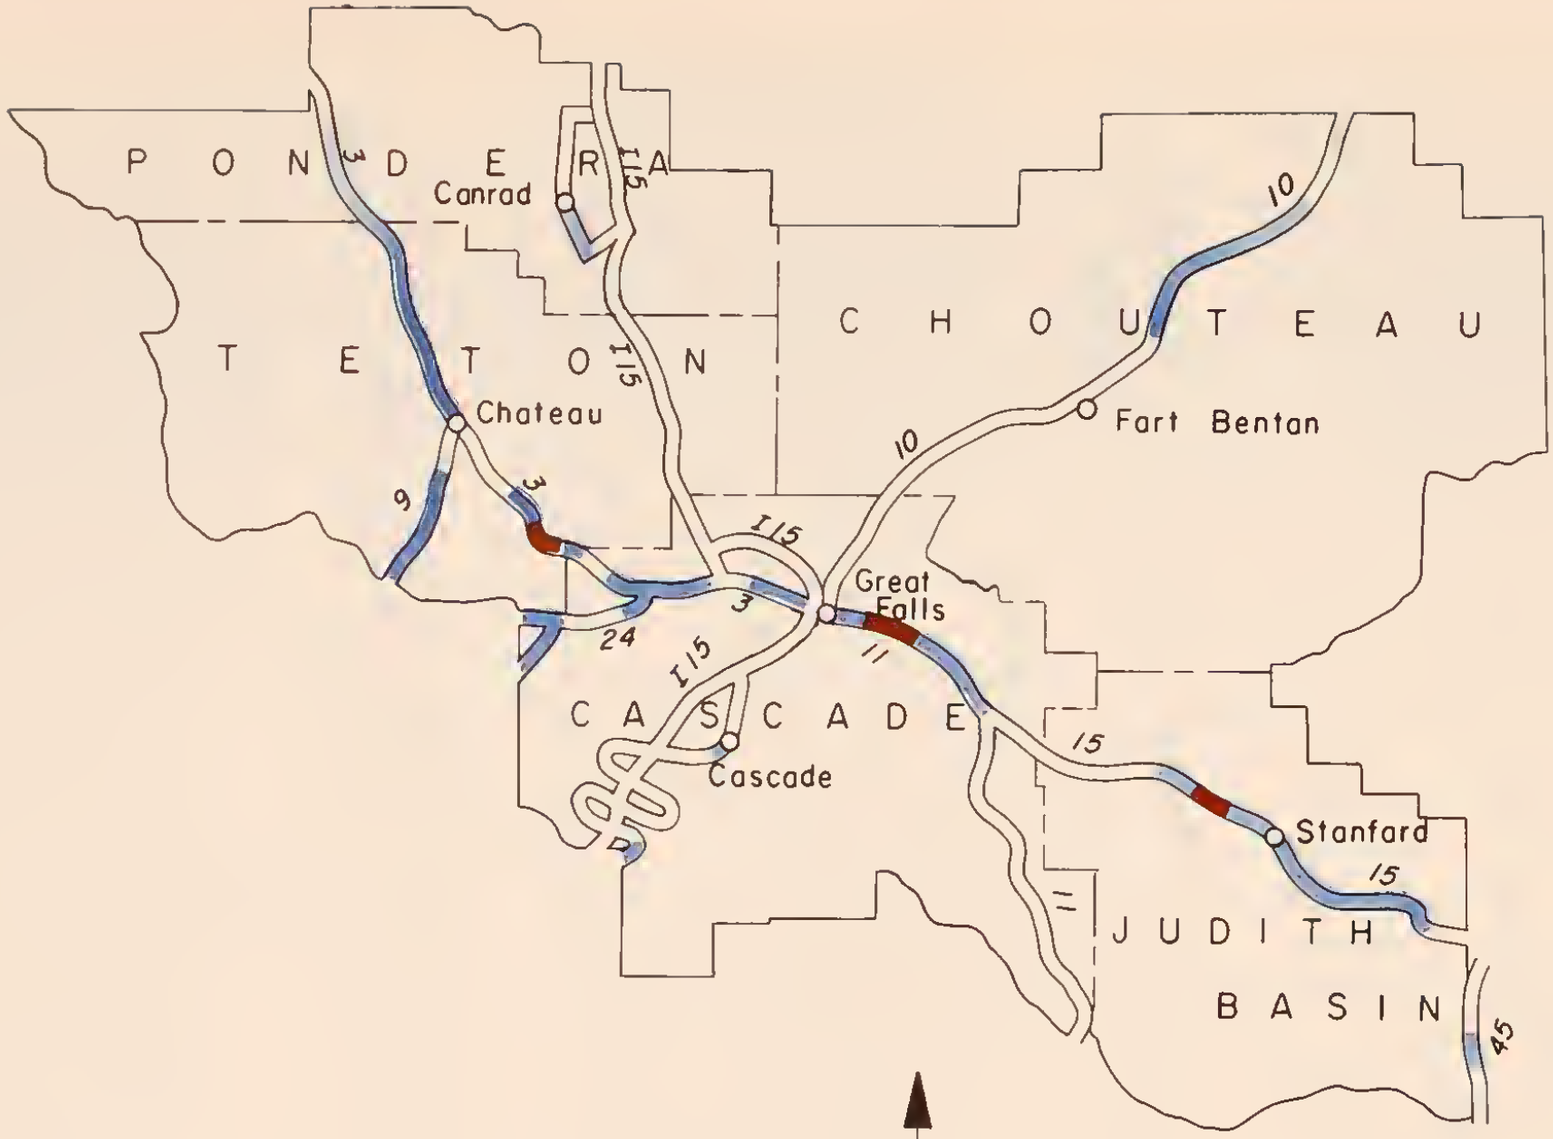

SUFFICIENCY RATING BY FINANCIAL DISTRICT 6
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 6

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ11	217+0.349	FAS RTES 227 & 228	CASCADE	6 39 71	.996	32	32	RMS	3593	467	268	4	19	10	2	4	39	29	.6
PJ15	26+0.568	4.7 E GEYSER	JUDITH BASIN	6 36 50	6.610	22	25	RMS	1240	147	243	0	11	6	2	21	40	38	4.0
PJ03	319+0.191	TETON CO	TETON	6 21 32	2.966	20	22	BST	1424	185	397	0	13	4	1	23	41	38	1.7
PJ11	211+0.469	7.0 N FAS 331	CASCADE	6 42 52	5.894	26	31	RMS	2641	343	340	3	16	10	5	15	47	39	3.1
PJ10	52+0.381	LOMA	CHOUTEAU	6 39 71	2.019	32	32	RMS	4074	529	324	5	18	10	13	6	52	41	1.0
PJ10	51+0.544	0.6 S LOMA	CHOUTEAU	6 34 63	2.763	22	24	RMS	1161	150	380	0	9	8	2	24	43	41	1.6
PJ03	299+0.631	I 15 VAUGHN	CASCADE	6 36 36	.677	24	24	RMS	1131	147	335	0	12	8	0	23	43	41	.4
PJ03	322+1.038	FAIRFIELD	TETON	6 55 71	1.235	28	32	RMS	3268	424	396	5	18	10	4	14	51	41	.6
PJ03	340+0.952	CHOTEAU	TETON	6 21 45	1.492	20	24	BST	765	99	440	0	12	3	0	27	42	43	.6
PJ03	358+0.625	4.6 N BYNUM	TETON	6 21 32	12.944	20	22	BST	750	180	397	0	13	5	1	23	42	43	7.5
PJ15	54+0.311	MOCCASIN	JUDITH BASIN	6 32 32	8.589	20	24	BST	488	117	246	0	10	6	1	23	40	44	5.2
PJ21	44+1.341	3.0 S CONRAD	PONDERA	6 58 71	2.337	22	24	RMS	1350	160	302	2	15	7	1	22	47	44	1.2
PJ24	116+0.833	CASCADE CO	CASCADE	6 64 64	2.835	24	26	RMS	891	115	264	0	11	8	2	23	44	44	1.6
PJ15	41+0.824	5.2 E FAS 230	JUDITH BASIN	6 52 52	10.632	24	26	RMS	1076	161	308	0	15	7	2	22	46	45	5.7
PJ15	36+0.650	JCT FAS RTE 230	JUDITH BASIN	6 36 36	12.442	20	24	RMS	1294	153	364	0	13	6	5	24	48	45	6.5
PJ15	33+0.205	11.3 E GEYSER	JUDITH BASIN	6 37 37	5.169	24	30	RMS	1503	178	286	0	11	9	8	21	49	45	2.6
PJ24	138+0.485	SUN RIVER	CASCADE	6 37 37	3.438	24	30	RMS	1315	156	522	0	11	5	3	26	49	46	1.8
PJ10	55+0.129	2.8 N LOMA	CHOUTEAU	6 36 71	1.321	25	31	RMS	1713	239	453	3	16	9	2	22	52	47	.6
PJ10	63+0.939	11.6 N LOMA	CHOUTEAU	6 34 55	8.766	22	24	RMS	1043	135	435	0	12	8	3	25	48	47	4.6
PJ03	353+0.948	BYNUM	TETON	6 34 51	8.465	22	24	RMS	932	121	672	0	10	8	3	27	48	48	4.4
PJ03	367+0.264	PONDERA CO	PONDERA	6 32 32	4.648	20	24	BST	494	119	364	0	11	6	2	25	44	48	2.6
PJ03	374+0.208	DUPUYER	PONDERA	6 32 51	6.905	20	24	RMS	466	112	391	0	12	4	1	26	43	48	3.9
PJ10	86+0.041	3.4 S HILL CO	CHOUTEAU	6 32 51	8.382	20	24	RMS	396	95	336	0	11	4	1	26	42	48	4.9
PJ03	300+0.866	1.4 W VAUGHN	CASCADE	6 33 41	3.370	20	24	BST	1119	145	476	0	12	7	6	25	50	48	1.7
PJ03	292+0.026	0.1 W FAI 15	CASCADE	6 36 36	6.230	25	31	RMS	2957	384	631	3	15	8	11	21	58	49	2.6
PJ03	258+0.974	JCT I 15 CASCADE S	CASCADE	6 38 49	7.270	24	30	RMS	1023	127	554	0	13	8	3	27	51	50	3.6
PJ10	72+0.462	6.9 S BIG SANDY	CHOUTEAU	6 33 53	.173	24	28	RMS	493	149	368	0	12	10	0	24	46	50	.1
PJ03	317+0.076	2.1 S TETON CO	CASCADE	6 34 51	6.871	22	24	RMS	990	128	390	0	12	8	6	25	51	50	3.4
PJ03	307+0.105	JCT FAP 24	CASCADE	6 21 32	2.110	20	22	BST	952	123	397	0	12	4	11	25	52	51	1.0
PJ11	200+0.003	JCT FAP RTE 15	CASCADE	6 36 61	7.139	24	31	RMS	1009	131	469	0	15	6	5	26	54	53	3.2
PJ45	69+0.837	JUDITH BASIN CO	JUDITH BASIN	6 55 55	3.606	40	40	RMS	1747	227	380	3	17	10	7	21	58	53	1.5
PJ15	21+0.888	GEYSER	JUDITH BASIN	6 47 62	.581	24	24	RMS	887	115	414	3	13	10	1	26	53	53	.3
PJ24	142+0.160	2.6 W FAP 24	CASCADE	6 36 50	4.693	22	25	RMS	1234	146	431	0	12	7	12	25	56	54	2.1
PJ09	53+0.840	7.8 N FAS 408	TETON	6 34 37	2.969	20	24	BST	308	44	422	0	12	4	2	28	46	54	1.6
PJ09	43+0.145	TETON CO	TETON	6 36 36	6.133	22	25	RMS	435	69	286	0	14	8	1	26	49	54	3.1
PJ24	139+0.705	JCT FAP RTE 24	CASCADE	6 35 35	2.846	20	24	RMS	450	72	270	0	14	8	1	26	49	54	1.5
PJ15	56+0.674	2.3 E MOCCASIN	JUDITH BASIN	6 34 67	2.628	24	24	RMS	366	53	429	0	15	4	2	28	49	55	1.3
PJ09	46+0.003	JCT FAS 408	TETON	6 55 55	1.138	24	32	RMS	1310	155	503	4	14	10	5	25	58	55	.5
PJ03	242+0.130	CASCADE CO	CASCADE	6 35 35	7.848	20	24	RMS	384	61	325	0	15	8	1	27	51	57	3.8
PJ11	204+0.514	JCT FAS RTE 331	CASCADE	6 33 33	2.226	24	26	RMS	138	22	527	0	11	3	1	29	44	57	1.2
PJ03	324+0.541	1.5 N FAIRFIELD	TETON	6 52 55	6.955	24	32	PMS	2384	309	380	6	17	10	14	18	65	58	2.4
PJ03	246+0.952	NOVAK CR BRIDGE	CASCADE	6 21 45	2.698	20	24	BST	707	91	453	0	12	3	18	27	60	61	1.1
PJ10	3+0.530	GREAT FALLS	CASCADE	6 33 33	3.973	20	24	PMS	117	17	405	0	12	4	1	29	46	61	2.1
PJ03	253+0.688	0.2 N TINT INTCH	CASCADE	6 40 71	3.633	28	28	PMS	2037	264	562	6	27	9	2	23	67	62	1.2
PJ11	167+0.998	NEIHART	CASCADE	6 33 53	1.210	24	28	RMS	95	14	198	0	12	6	0	29	47	63	.6
PJ03	327+0.226	4.2 N FAIRFIELD	TETON	6 52 52	10.526	22	26	PMS	491	73	492	5	16	8	2	28	59	63	4.3
PJ03	256+0.365	I 15 SEPARATION	CASCADE	6 40 40	12.297	24	30	RMS	757	98	600	0	16	7	12	28	63	64	4.5
PJ10	80+0.000	BIG SANDY	CHOUTEAU	6 33 53	1.999	20	24	RMS	82	12	365	0	9	7	1	30	47	64	1.1
PJ10	16+0.224	CHOUTEAU CO	CHOUTEAU	6 33 63	4.794	24	26	RMS	1200	156	567	0	13	7	20	26	66	64	1.6
PJ03	251+0.599	0.6 N HARDY CR SEP	CASCADE	6 51 57	3.832	30	30	PMS	1683	218	565	4	16	10	15	24	69	65	1.2
PJ11	182+0.694	4.2 N MCNARCH	CASCADE	6 33 53	1.492	20	24	RMS	102	15	270	0	12	6	2	29	49	65	.8
PJ45	80+0.473	0.9 S FERGUS CO	JUDITH BASIN	6 40 40	6.667	26	26	BST	497	74	571	3	15	9	6	28	61	65	2.6
PJ15	10+0.428	JCT FAS RTE 427	JUDITH BASIN	6 46 59	.876	24	24	RMS	810	105	518	0	12	8	18	27	65	65	.3
PJ24	133+0.232	5.7 E SPUR RTE 24	CASCADE	6 64 64	7.500	32	32	PMS	1258	149	352	7	19	10	8	24	68	66	2.4
				6 64 64	5.275	32	32	PMS	1702	238	562	5	23	10	8	24	70	66	1.6

FINANCIAL DISTRICT NUMBER 6

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ15	0+0.000	JCT FAP RTE 11	CASCADE	6	60	60	5.418	32	32	PMS	1427	169	380	4	18	10	15	23	70	67	1.6
PJ03	260+0.248	CASCADE	CASCADE	6	24	54	1.792	22	24	RMS	60	9	544	0	13	3	1	30	47	67	.9
PJ03	262+0.040	1.8 N CASCADE	CASCADE	6	24	53	12.577	24	24	RMS	63	9	461	0	13	4	1	30	48	67	6.5
PJ10	9+0.609	6.1 N GR FALLS	CASCADE	6	51	57	6.490	30	30	PMS	1738	225	414	4	16	10	19	22	71	67	1.9
PJ03	291+0.535	JCT FAI 15	CASCADE	6	67	67	.105	30	30	PMS	1167	145	576	9	26	10	0	26	71	69	
PJ03	299+0.296	0.3 E VAUGHN INT	CASCADE	6	61	61	.335	24	30	PMS	915	118	780	6	19	10	7	28	70	70	.1
PJ11	157+0.700	CASCADE CO	CASCADE	6	59	63	7.208	26	26	PMS	347	52	266	7	19	10	1	27	64	70	2.6
PJ45	78+0.456	JUDITH BASIN CO	JUDITH BASIN	6	41	70	2.021	24	24	RMS	810	105	414	6	18	10	10	26	70	70	.6
PJ15	7+0.062	JUDITH BASIN CO	JUDITH BASIN	6	61	61	3.343	32	32	PMS	1322	157	448	6	22	10	10	25	73	71	.9
PJ21	47+2.078	CONRAD	PONDERA	6	51	65	8.734	32	32	RMS	336	43	428	4	16	10	7	28	65	71	3.1
PJ10	20+0.057	3.8 N CHOUTEAU CO	CHOUTEAU	6	63	63	9.726	32	32	PMS	1655	215	640	6	21	10	14	25	76	72	2.3
PJ24	127+0.465	JCT SPUR RTE 24	CASCADE	6	59	59	5.720	32	32	PMS	1710	239	643	8	26	10	9	24	77	73	1.3
PJ15	5+0.302	5.3 E FAP 11	CASCADE	6	61	61	1.770	32	32	PMS	1341	159	448	5	23	10	12	25	75	73	.4
PJ11	178+0.469	MONARCH	CASCADE	6	52	52	4.235	22	26	PMS	575	86	441	7	19	8	9	27	70	73	1.3
PJ09	60+0.000	4.0 S CHOTEAU	TETON	6	36	36	4.014	22	25	RMS	521	83	518	0	15	8	20	28	71	74	1.2
PJ45	67+0.221	JUDITH BASIN CO	JUDITH BASIN	6	47	73	.678	24	24	PMS	870	113	545	5	14	8	1	30	58	74	.5
PJ03	314+0.375	7.3 N FAP 24	CASCADE	6	42	42	1.479	24	30	RMS	942	122	518	3	14	10	20	27	74	74	.2
PJ15	17+0.930	7.5 E FAS 427	JUDITH BASIN	6	64	64	3.967	32	32	PMS	1258	149	600	4	17	8	20	27	76	75	.4
PJ03	315+0.870	8.8 N FAP 24	CASCADE	6	62	62	1.232	35	35	BST	945	122	592	7	23	10	11	26	77	75	.5
PJ10	7+0.159	3.6 N GREAT FALLS	CASCADE	6	40	71	2.469	28	28	PMS	1769	229	616	4	19	10	20	27	80	79	.2
PJ15	57+0.839	3.4 E MOCCASIN	JUDITH BASIN	6	71	71	6.520	32	32	PMS	1392	165	666	8	28	9	12	25	82	79	.4
PJ11	189+0.343	10.7 N MONARCH	CASCADE	6	69	69	1.931	48	48	PMS	416	62	520	10	28	10	1	28	77	81	.4
PJ21	44+0.516	I15 S CONRAD	PONDERA	6	72	72	.825	40	40	PMS	652	84	616	10	30	10	2	28	80	81	.2
PJ10	39+0.560	0.4 N FT BENTON	CHOUTEAU	6	74	74	12.039	32	32	PMS	1048	136	621	10	28	10	7	27	82	81	2.2
PJ10	29+0.727	13.5 N CHOUTEAU CO	CHOUTEAU	6	64	64	9.834	32	32	PMS	1631	212	720	7	23	10	18	26	84	81	1.6
PJ10	84+0.818	4.8 N BIG SANDY	CHOUTEAU	6	70	70	1.223	32	32	PMS	1145	148	720	9	28	10	12	27	86	85	.2
PJ03	246+0.660	CANYON INT APPR	CASCADE	6	68	68	.292	24	24	PMS	127	19	266	10	27	10	0	29	76	86	.1
PJ03	245+0.850	3.7 N CASCADE CO	CASCADE	6	68	68	.810	24	24	PMS	170	25	243	10	30	10	2	28	80	87	.2
PJ11	191+0.174	9.2 SO. FAP 15	CASCADE	6	69	69	9.190	40	40	PMS	451	67	568	10	28	10	10	28	86	88	1.3
PJ03	244+0.350	2.2 N CASCADE CO	CASCADE	6	72	72	1.501	26	26	PMS	158	24	527	10	30	10	2	29	81	89	.3
PJ03	250+0.925	HARDY CR SEP	CASCADE	6	68	68	.674	24	24	PMS	107	16	510	10	29	10	0	30	79	89	.1
PJ03	382+0.648	8.4 N DUPUYER	PONDERA	6	66	66	5.576	34	34	PMS	614	147	640	10	26	10	16	27	89	90	.6
PJ21	57+0.096	JCT FAS 216	PONDERA	6	72	72	.523	34	34	PMS	526	68	720	10	30	10	10	29	89	90	.1
PJ03	253+0.450	TINTINGER INTCH	CASCADE	6	63	63	.238	24	24	PMS	98	14	672	10	27	10	20	30	97	98	
PJ03	258+0.364	0.6 S CASCADE INTC	CASCADE	6	63	63	.610	24	24	PMS	77	23	504	10	28	10	20	29	97	99	
		DISTRICT TOTAL					399.469														41 162.8

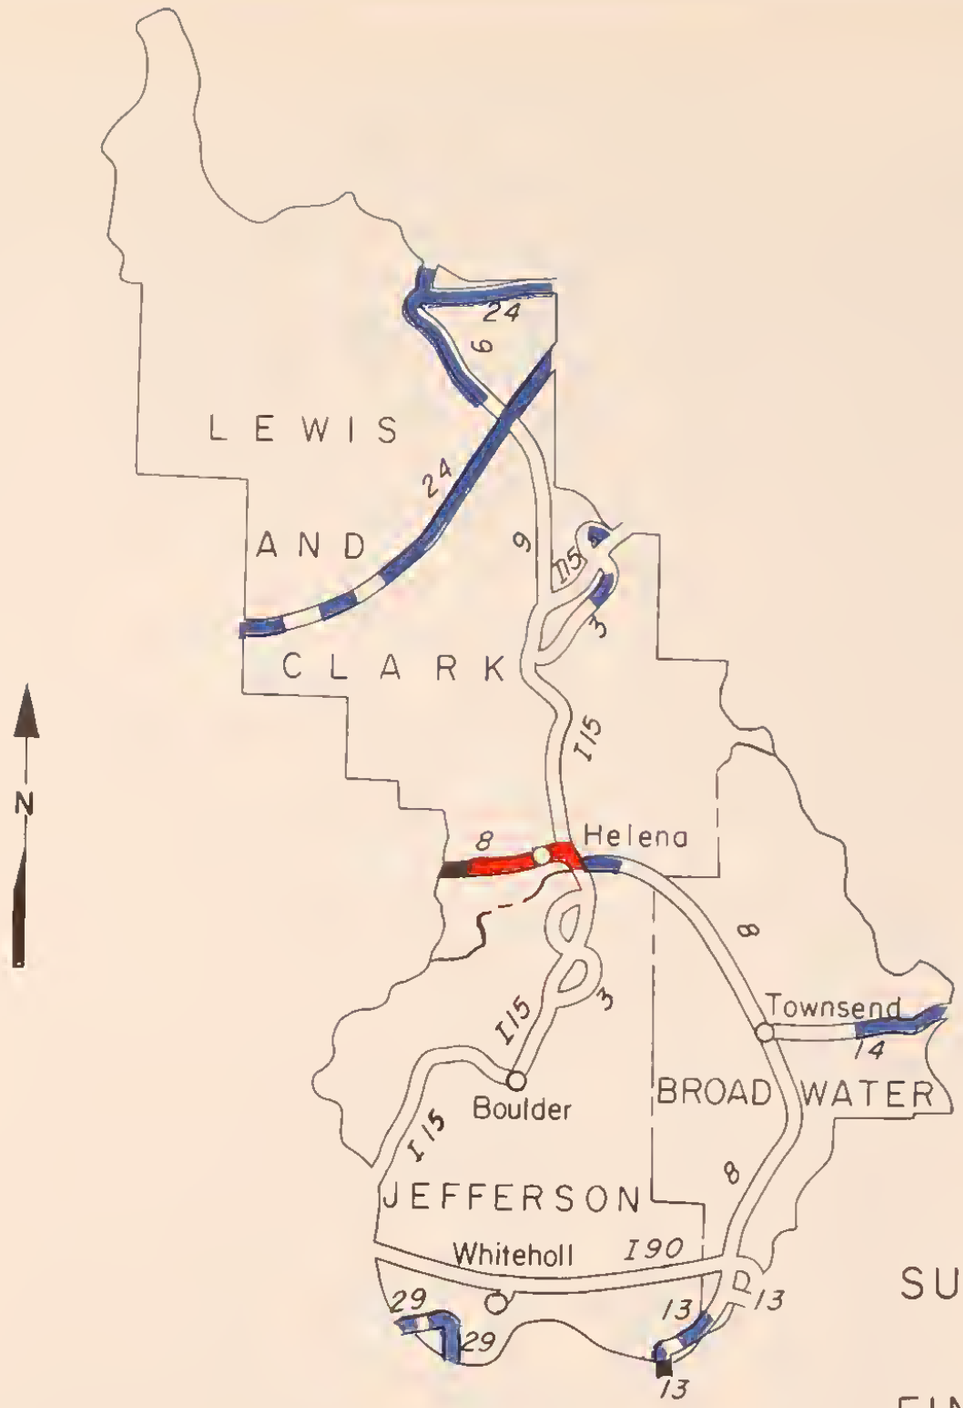

SUFFICIENCY RATING
BY
FINANCIAL DISTRICT 7
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 7

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	---SUFFICIENCY RATINGS--- FNO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
P008	46+0.476	HELENA	LEWIS AND CLARK	7	36	36	2.094	24	30	PMS	7265	871	524	0	12	3	3	5	23	12	1.6
P008	30+0.001	2.2E LEW & CL CO	LEWIS AND CLAPK	7	31	35	4.187	24	30	PMS	1463	190	364	0	13	5	2	22	42	38	2.4
P008	34+0.269	1.1 E END FHR 28	LEWIS AND CLARK	7	33	54	5.345	22	30	RMS	1729	224	367	0	13	8	2	21	44	39	3.0
P008	49+0.860	EAST HELENA	LEWIS AND CLARK	7	36	36	2.962	24	30	PMS	2715	415	500	3	17	7	4	18	49	41	1.5
P024	91+0.218	8.2 E FAS 279	LEWIS AND CLARK	7	48	70	5.819	24	25	PMS	956	143	132	3	16	8	2	14	42	42	3.3
P024	86+0.129	3.1 E FAS 279	LEWIS AND CLARK	7	57	64	5.094	28	30	PMS	956	143	104	7	20	10	1	9	47	46	2.7
P024	109+0.052	JCT FAP RTE 9	LEWIS AND CLARK	7	52	52	7.789	24	26	RMS	1005	150	308	0	15	8	2	23	48	47	4.1
P024	100+0.526	JCT FAS RTE 434	LEWIS AND CLARK	7	51	51	8.522	25	25	BST	993	148	217	0	13	8	10	20	51	50	4.2
P009	38+0.547	AUGUSTA FAS 434	LEWIS AND CLARK	7	35	36	1.336	22	24	RMS	807	129	812	0	13	7	1	28	49	50	
P024	97+0.041	14.0 E FAS 279	LEWIS AND CLARK	7	48	63	3.505	24	25	PMS	956	143	237	3	16	8	4	21	52	51	1.7
P029	68+0.871	6.1 E JEFF CO LINE	JEFFERSON	7	31	62	6.155	22	26	RMS	416	54	296	0	10	7	3	27	47	52	3.3
P029	59+0.892	JEFFERSON CO LINE	JEFFERSON	7	36	36	5.791	18	24	RMS	303	45	502	0	10	5	1	29	45	53	3.2
P013	88+0.763	BROADWATER CO LINE	BROADWATER	7	32	61	4.247	20	24	RMS	328	42	396	0	10	7	2	28	47	54	2.3
P014	13+0.545	11.2 E FAS 284	BROADWATER	7	51	51	9.901	20	26	RMS	385	57	134	2	16	5	1	24	48	54	5.1
P009	29+0.380	9.3 N FAP 24	LEWIS AND CLARK	7	32	36	9.091	20	24	BST	322	51	240	0	12	7	1	27	47	54	4.8
P009	20+0.875	0.8 N FAP 24	LEWIS AND CLARK	7	32	36	8.470	20	24	BST	304	48	535	0	8	7	2	29	46	54	4.6
P014	6+0.411	4.0 E FAS 284	BROADWATER	7	37	52	7.187	20	25	RMS	382	57	387	0	12	7	2	28	49	55	3.7
P009	39+0.890	JCT SPUR FAP 24	LEWIS AND CLARK	7	35	36	3.248	22	24	PMS	468	74	360	0	14	8	2	27	51	56	1.6
P024	150+0.680	5.6 W L & C CO	LEWIS AND CLARK	7	35	36	9.902	22	24	RMS	287	41	420	0	12	6	3	29	50	58	5.0
P024	145+0.109	LEWIS & CLARK CO	LEWIS AND CLARK	7	34	62	5.554	24	24	RMS	271	39	301	0	15	5	1	28	49	58	2.8
P024	65+0.472	LEWIS & CLARK CO	LEWIS AND CLARK	7	60	60	6.788	24	24	PMS	1343	221	328	6	21	10	4	20	61	58	2.6
P029	66+0.000	JCT FORMER FAP 2	JEFFERSON	7	31	40	2.000	24	31	RMS	388	50	248	0	13	10	2	27	52	58	1.0
P024	76+0.133	3.9 E LINCOLN	LEWIS AND CLARK	7	60	60	5.887	24	24	PMS	1128	169	295	7	21	10	2	21	61	59	2.3
P013	83+0.952	SAPPINGTON JCT	JEFFERSON	7	32	48	5.273	24	30	RMS	277	42	323	0	14	8	1	28	51	59	2.6
P003	240+0.700	1.4 S CASCADE CO	LEWIS AND CLARK	7	33	47	1.450	24	26	RMS	126	24	694	0	11	4	1	29	45	59	.8
P003	236+0.392	CRAIG JCT	LEWIS AND CLARK	7	33	47	1.782	24	26	RMS	125	39	632	0	11	4	1	29	45	59	1.0
P003	227+0.885	WOLF CREEK JCT	LEWIS AND CLARK	7	35	47	8.527	24	26	RMS	135	42	260	0	12	6	1	28	47	61	4.5
P024	82+0.008	1.0 W JCT FAS 279	LEWIS AND CLARK	7	57	64	4.104	28	30	PMS	988	148	333	7	17	10	5	23	62	61	1.6
P013	93+0.363	JCT FAP 8	BROADWATER	7	68	68	.330	40	40	RMS	583	75	75	8	25	10	1	15	59	62	.1
P003	183+0.377	1.6 N CLANCY	JEFFERSON	7	30	69	.424	24	24	PMS	505	65	187	5	23	6	0	25	59	63	.2
P008	78+0.114	TOWNSEND	BROADWATER	7	39	39	9.673	24	32	RMS	1527	198	629	0	12	10	20	25	67	63	3.2
P008	108+0.855	1.0 S FAI 90	BROADWATER	7	68	68	.321	44	44	RMS	893	116	118	10	28	10	1	15	64	64	.1
P008	107+0.893	JCT FAI 90	BROADWATER	7	68	68	.308	40	40	PMS	893	116	118	10	28	10	1	15	64	64	.1
P013	83+0.044	JEFFERSON CO LINE	JEFFERSON	7	34	52	.908	22	24	PMS	340	52	342	3	17	8	1	28	57	64	.4
P024	72+0.242	LINCOLN	LEWIS AND CLARK	7	60	60	3.867	24	24	PMS	1401	210	450	6	19	10	9	23	67	64	1.3
P029	67+0.995	7.0 E JEFF CO LINE	JEFFERSON	7	51	51	.888	34	34	RMS	395	51	243	0	13	10	9	27	59	65	.4
P008	87+0.738	TOSTON APPR RD	BROADWATER	7	50	51	11.260	24	26	RMS	1181	153	500	4	16	10	14	25	69	67	3.5
P003	184+0.095	2.3 N CLANCY	JEFFERSON	7	30	69	.517	24	24	PMS	505	65	218	5	24	7	1	26	63	67	.2
P003	220+0.183	SPRING CR INTCH	LEWIS AND CLARK	7	35	35	7.702	20	24	PMS	55	17	635	0	10	5	2	30	47	67	4.1
P003	184+0.612	2.8 N CLANCY	JEFFERSON	7	69	69	1.412	24	24	PMS	505	65	156	8	24	9	0	24	65	69	.5
P008	98+0.993	0.8 E JCT FAS 437	BROADWATER	7	52	52	8.748	24	28	RMS	1488	193	377	3	17	10	20	22	72	69	2.4
P008	65+0.436	0.7 S WINSTON	BROADWATER	7	56	65	11.541	32	32	PMS	1878	244	696	8	24	10	7	25	74	70	3.0
P003	186+0.199	1.5 S MONT CITY	JEFFERSON	7	39	69	1.462	24	36	PMS	505	65	340	5	24	8	2	27	66	70	.5
P008	108+0.202	0.3 S FAI 90	BROADWATER	7	52	52	.653	24	28	PMS	893	116	558	4	17	10	13	27	71	71	.2
P009	54+0.482	JEFFERSON CO	JEFFERSON	7	69	69	1.514	40	40	PMS	2421	370	283	10	27	10	20	10	77	72	.3
P008	52+0.831	3.0 E EAST HELENA	LEWIS AND CLARK	7	69	69	1.670	40	40	PMS	2562	391	344	9	26	10	20	13	78	72	.4
P003	182+0.809	1.0 N CLANCY	JEFFERSON	7	69	69	.568	24	24	PMS	505	65	280	9	24	10	1	27	71	74	.2
P014	0+0.888	TOWNSEND	BROADWATER	7	64	64	1.513	32	32	PMS	1200	180	569	9	25	10	10	25	79	77	.3
P014	2+0.398	JCT FAS RTE 284	BROADWATER	7	64	64	3.999	32	32	PMS	459	68	487	8	23	10	5	28	74	78	1.0
P008	57+0.135	1.1 E BROADWATER	BROADWATER	7	72	72	8.303	34	34	PMS	1938	251	504	8	24	10	17	23	82	78	1.5
P003	181+1.116	CLANCY INTCH	JEFFERSON	7	69	69	.801	28	28	PMS	505	65	316	10	28	10	1	27	76	79	.2
P009	12+0.411	12.4 N FAI 15	LEWIS AND CLARK	7	63	63	7.749	32	32	PMS	261	41	511	5	21	10	8	29	73	80	2.1
P008	55+0.995	BROADWATER CO	BROADWATER	7	69	69	1.139	40	40	PMS	2013	261	320	9	27	10	20	18	84	81	
P003	187+0.661	0.2 S MONT CITY	JEFFERSON	7	69	69	.162	34	34	PMS	505	65	512	10	28	10	2	28	78	81	.2
P003	182+0.598	0.8 N CLANCY	JEFFERSON	7	30	69	.211	24	24	PMS	505	65	353	4	23	6	20	27	80	82	

FINANCIAL DISTRICT NUMBER 7

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNC	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
P009	0+0.000	JCT FAI 15	LEWIS AND CLARK	7	67	67	2.209	30	30	PMS	315	50	697	9	27	10	3	29	78	83	.5
P008	107+0.697	0.2 N FAI 90	BROADWATER	7	68	68	.196	40	40	PMS	1720	223	296	10	28	10	20	19	87	85	
P003	238+0.174	1.8 N CRAIG	LEWIS AND CLARK	7	67	67	.419	24	24	PMS	125	33	406	10	28	10	1	29	78	88	.1
P009	1+0.950	1.9 N FAI 15	JEFFERSON	7	69	69	.314	24	24	PMS	505	65	218	8	24	10	20	26	88	89	
P013	93+0.067	0.3 W FAP 8	LEWIS AND CLARK	7	59	59	10.453	32	32	PMS	292	46	482	7	23	10	17	29	86	90	1.5
P009	20+0.149	JCT FAP 24	BROADWATER	7	68	68	.296	40	40	RMS	358	46	96	9	26	10	20	23	88	90	
P003	238+0.593	2.2 N CRAIG	LEWIS AND CLARK	7	63	63	.726	32	32	PMS	282	45	411	8	23	10	20	28	89	92	.1
P003	219+0.219	JCT FAI 15	LEWIS AND CLARK	7	69	69	2.668	24	24	PMS	125	32	336	10	28	10	8	29	85	92	.4
P008	27+0.617	LEWIS & CLARK CO	LEWIS AND CLARK	7	65	65	.440	24	24	PMS	45	13	374	10	25	10	20	29	94	99	
			LEWIS AND CLARK	7			2.262	UNDER CONSTRUCTION													
		DISTRICT TOTAL					259.636														41 106.6

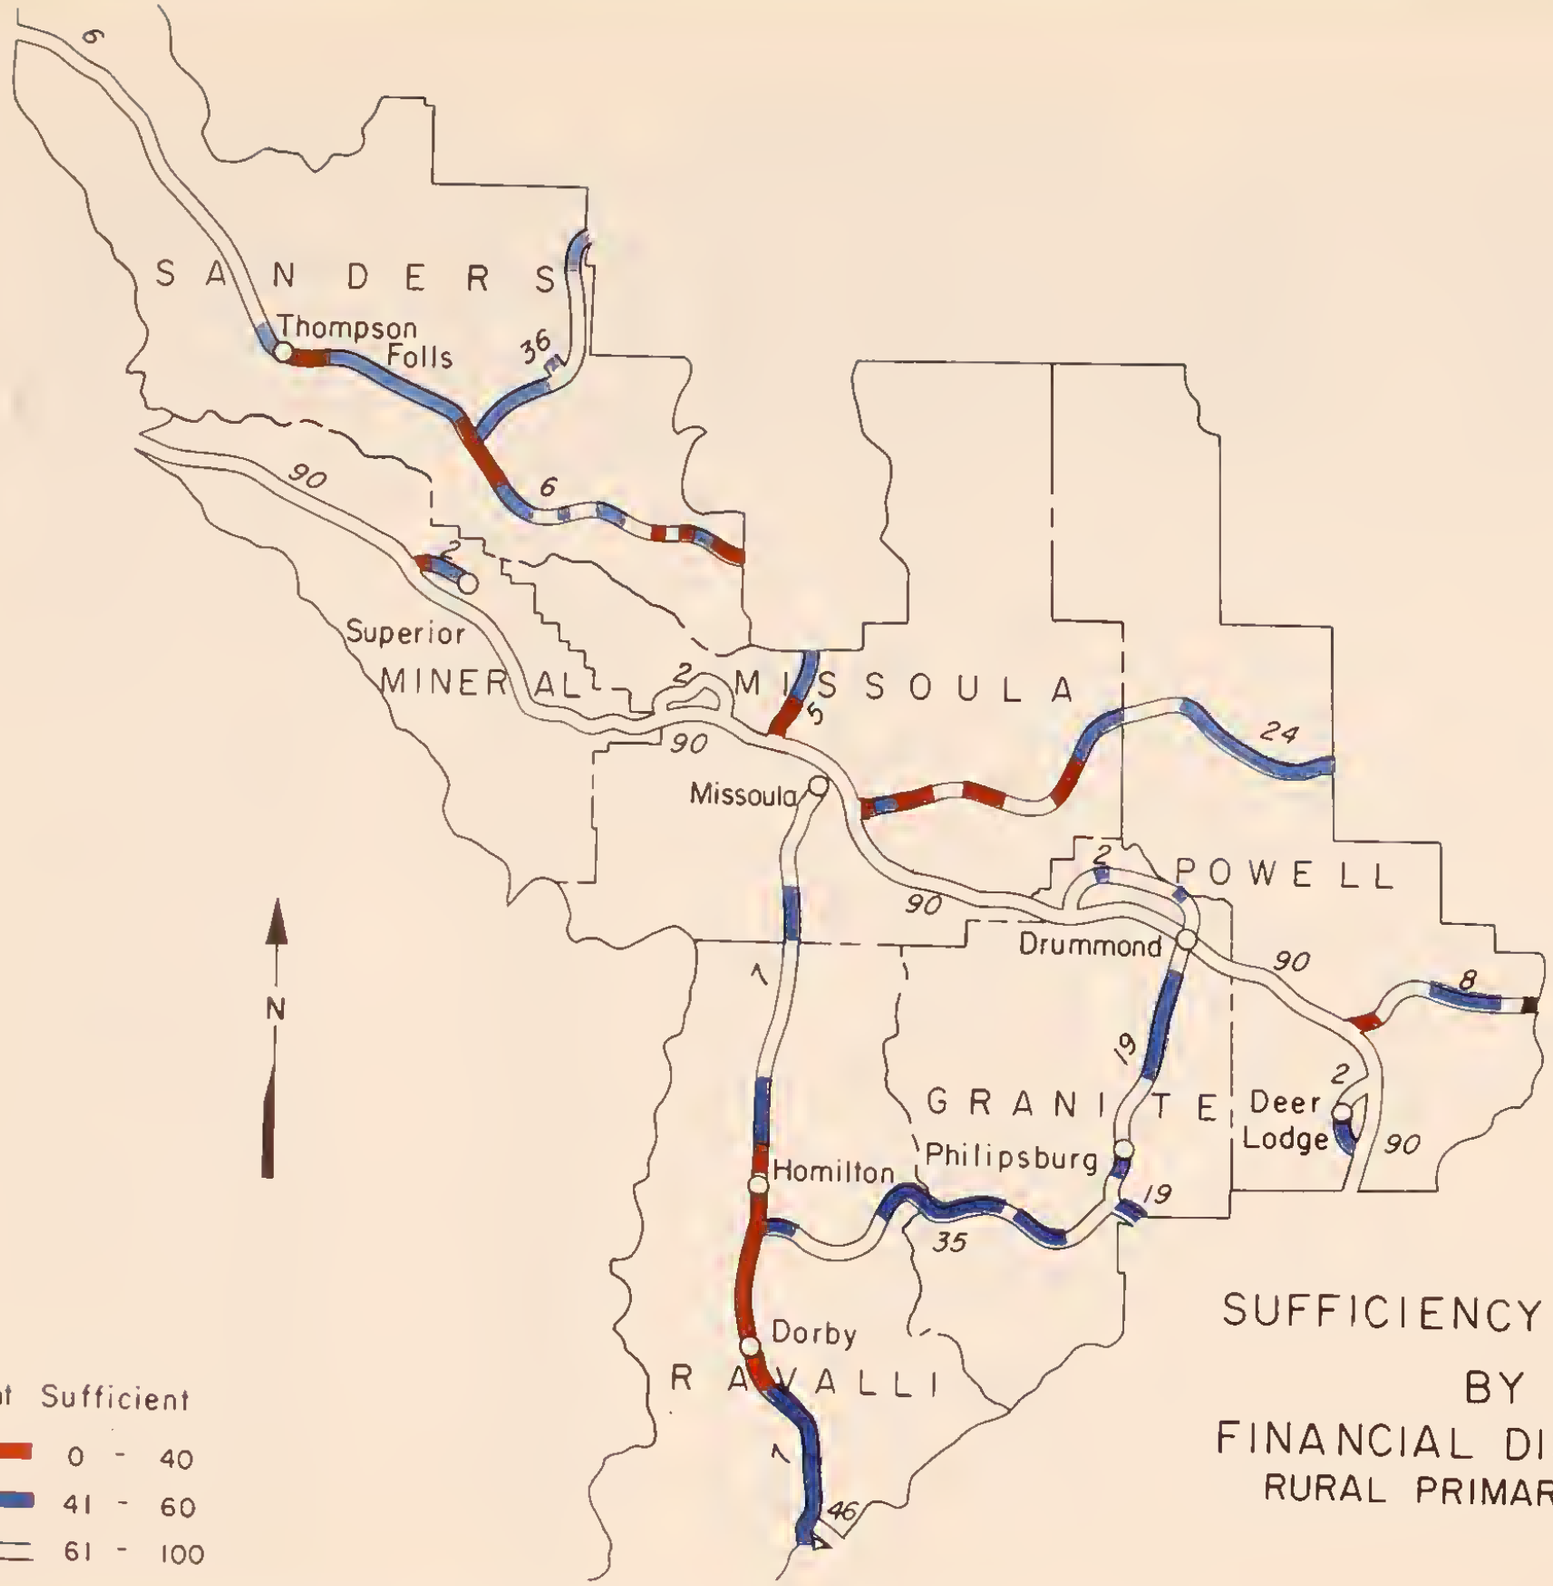

SUFFICIENCY RATING BY FINANCIAL DISTRICT 8

RURAL PRIMARY SYSTEM

FINANCIAL DISTRICT NUMBER 8

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
P002	705+0.494	FUT W SUPERIOR INT	MINERAL	8			.200	NON EXISTENT													.2
P005	0+0.240	0.2 N FAI 90	MISSOULA	8	34	55	3.470	20	24	RMS	3874	565	239	0	13	7	1	0	21	14	2.7
P024	12+0.237	11.3 E BONNER	MISSOULA	8	41	63	3.821	24	24	RMS	1671	275	145	0	14	6	2	2	24	20	2.9
P005	4+0.000	3.7 N JCT FAI 90	MISSOULA	8	48	54	1.536	24	32	RMS	3768	550	182	2	14	7	10	0	33	24	1.0
P007	44+0.554	JCT FAP 35	RAVALLI	8	34	59	2.060	22	24	RMS	3506	455	627	0	8	4	3	19	34	25	1.4
P007	48+0.000	HAMILTON	RAVALLI	8	40	40	1.731	24	30	RMS	4267	554	780	0	10	4	5	19	38	27	1.1
P024	0+1.845	BONNER	MISSOULA	8	36	37	4.039	30	30	RMS	2062	340	258	3	16	4	1	10	34	28	2.7
P024	7+0.551	6.7 E BONNER	MISSOULA	8	40	42	4.668	20	24	RMS	1737	286	260	0	13	5	2	14	34	29	3.1
P024	22+0.634	6.6 E POTOMAC	MISSOULA	8	41	49	4.023	25	25	BST	1615	266	182	0	8	7	13	8	36	32	2.6
P007	31+0.292	DARBY	RAVALLI	8	34	35	11.755	18	24	RMS	2043	265	414	0	10	6	2	20	38	32	7.3
P006	76+0.261	PLAINS	SANDERS	8	31	34	.380	18	24	RMS	1724	256	259	0	11	3	8	15	37	32	.2
P006	76+0.641	JCT FAP 36	SANDERS	8	31	34	2.278	18	24	RMS	1203	179	238	0	12	3	0	19	34	32	1.5
P007	51+0.570	THOMPSON FALLS	SANDERS	8	35	36	1.883	20	24	RMS	1539	224	290	0	11	6	3	18	38	34	1.2
P007	26+0.490	JCT FAS 473	RAVALLI	8	36	59	4.000	22	26	RMS	1647	214	453	0	10	6	2	23	41	37	2.4
P006	103+0.023	7.4 E PERMA	SANDERS	8	49	49	1.501	30	30	BST	2225	289	345	4	14	9	1	17	45	38	.8
P006	108+0.148	DIXON	SANDERS	8	22	57	1.701	20	24	RMS	756	112	281	0	10	3	0	24	37	38	1.1
P006	105+0.123	1.4 W DIXON	SANDERS	8	27	50	7.086	20	24	RMS	985	146	406	0	10	4	1	25	40	39	4.3
P008	0+0.000	JCT FAI 90	POWELL	8	22	34	1.062	22	24	RMS	781	116	378	0	9	3	1	25	38	39	.7
P006	53+0.427	2.1 E THOMP FALLS	SANDERS	8	31	53	3.913	24	24	RMS	1158	150	249	0	13	6	1	21	41	39	2.3
P005	0+0.000	JCT FAI 90	MISSOULA	8	35	36	2.680	20	24	RMS	1288	191	255	0	12	8	4	19	43	40	1.5
P006	78+0.947	2.3 E JCT FAP 36	SANDERS	8	66	66	.240	36	36	PMS	3954	577	392	8	23	10	2	8	51	40	.1
P024	0+0.000	JCT FAI 90	MISSOULA	8	31	51	6.128	20	24	RMS	1106	164	406	0	12	5	1	24	42	40	3.6
P006	68+0.701	WEEKSVILLE	SANDERS	8	74	74	.975	44	44	PMS	4008	661	344	10	28	10	2	1	51	40	.5
P007	23+0.549	2.9 S FAS 473	RAVALLI	8	38	52	3.890	20	24	RMS	944	140	233	0	14	4	3	21	42	41	2.3
P006	99+0.246	3.6 E PERMA	SANDERS	8	36	36	2.932	22	25	RMS	934	121	273	0	11	6	2	23	42	42	1.7
P005	5+0.530	5.2 N JCT FAI 90	MISSOULA	8	24	38	2.956	20	25	RMS	710	105	406	0	9	4	2	26	41	42	1.7
P008	11+0.267	AVON	POWELL	8	64	64	9.496	36	36	PMS	3566	520	453	4	15	10	10	13	52	42	4.6
P019	57+0.499	HALL FAS 512 & 513	GRANITE	8	33	58	11.942	22	24	RMS	1401	182	573	0	9	8	3	25	45	42	6.6
P019	27+0.690	GRANITE CO LINE	GRANITE	8	25	52	5.079	20	22	RMS	677	98	471	0	9	3	1	27	40	42	3.0
P006	72+0.578	3.1 W PLAINS	SANDERS	8	34	40	3.134	20	24	RMS	704	102	224	0	12	6	0	23	41	43	1.8
P007	49+0.732	1.7 N HAMILTON	RAVALLI	8	31	34	3.141	18	24	RMS	1211	160	408	0	12	6	4	23	45	43	1.7
P007	13+0.545	0.8 N SULA	RAVALLI	8	53	53	2.249	24	32	RMS	3194	415	648	0	11	10	11	20	52	43	1.1
P006	88+0.718	3.6 E JCT FAS 461	SANDERS	8	36	39	3.392	24	24	BST	846	109	235	0	12	7	2	23	44	44	1.9
P006	56+0.095	4.8 E THOMP FALLS	SANDERS	8	24	38	1.869	20	24	RMS	584	87	307	0	11	4	0	26	41	44	1.1
P006	94+0.088	1.1 W PERMA	SANDERS	8	35	49	1.717	20	24	RMS	1019	151	184	0	13	5	9	18	45	44	.9
P019	48+0.325	MAXVILLE	GRANITE	8	24	38	1.276	20	24	RMS	597	88	364	0	10	3	2	26	41	44	.8
P024	26+0.710	5.2 W FAS 209	MISSOULA	8	31	52	9.137	20	24	RMS	509	73	683	0	7	3	2	28	40	44	5.5
P035	32+0.154	6.3 E GRANITE CO	GRANITE	8	49	49	5.188	25	25	BST	1414	233	438	0	8	8	9	22	47	44	2.7
P035	14+0.578	11.2 W GRANITE CO	RAVALLI	8	23	23	6.475	11	11	GRV	86	13	113	0	0	3	0	28	31	45	4.5
P007	0+0.000	IDAHO LINE	RAVALLI	8	24	24	11.240	11	11	GRV	76	12	113	0	0	3	0	28	31	46	7.8
P007	16+0.756	4.2 N SULA	RAVALLI	8	40	40	.105	22	22	BST	671	87	329	0	13	5	0	26	44	46	.1
P006	85+0.066	JCT FAS 461	SANDERS	8	37	39	3.539	24	24	BST	862	112	235	0	13	7	3	23	46	46	1.9
P007	51+0.984	JCT FAS 373	RAVALLI	8	31	51	3.604	20	24	RMS	578	86	391	0	11	4	1	27	43	46	2.1
P007	0+0.105	JCT FAP 46	RAVALLI	8	53	53	7.046	24	32	RMS	2613	339	648	3	13	10	7	22	55	47	3.2
P007	20+0.475	7.7 N SULA	RAVALLI	8	40	40	7.430	22	22	BST	695	90	329	0	13	5	1	26	45	47	4.1
P007	82+0.746	LOLO	RAVALLI	8	37	39	3.081	24	24	BST	885	115	220	0	12	7	7	22	48	48	1.6
P035	25+0.875	GRANITE CO LINE	MISSOULA	8	68	68	.492	44	44	PMS	4891	635	206	10	30	10	10	0	60	48	.2
P036	0+0.000	JCT FAP RTE 6	GRANITE	8	23	23	6.280	11	11	GRV	72	11	113	0	0	3	0	29	32	48	4.3
P036	3+0.657	3.7 N FAP 6	SANDERS	8	44	47	3.661	20	28	BST	528	79	283	0	9	7	3	26	45	49	2.0
P006	57+0.808	6.5 E THOMP FALLS	SANDERS	8	41	47	3.802	20	25	BST	450	67	206	0	10	6	3	25	44	49	2.1
P002	707+0.000	SUPERIOR	MINERAL	8	34	49	6.899	20	24	RMS	848	126	233	0	13	5	9	22	49	49	3.5
P024	31+0.869	JCT FAS RTE 209	MISSOULA	8	31	52	.064	22	24	RMS	235	30	716	0	6	5	0	29	40	49	
P006	64+0.701	13.4 E THOMP FALLS	SANDERS	8	54	54	3.799	24	30	RMS	1137	187	499	0	10	10	7	24	51	49	1.9
P006	49+0.684	0.8 THOMPSON FALLS	SANDERS	8	39	39	3.997	26	26	BST	861	128	374	2	16	6	2	25	51	51	2.0
				8	48	54	.787	24	28	PMS	1246	181	271	5	15	9	5	20	54	51	.4

FINANCIAL DISTRICT NUMBER 8

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST RT IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ36	46+0.741	SPUR RTE 36	SANDERS	8 41 41	1.746	20	26	BST	842	126	685	0	9	6	9	27	51	51	.9
PJ36	7+0.436	7.5 N FAP 6	SANDERS	8 34 47	6.403	20	24	BST	403	60	288	0	10	6	2	27	45	51	3.5
PJ36	13+0.871	13.9 N FAP 6	SANDERS	8 41 41	2.385	20	26	BST	446	66	138	0	12	6	6	23	47	52	1.3
PJ35	39+0.473	13.4 E GRANITE CO	GRANITE	8 36 36	6.135	28	28	GRO	113	18	462	0	0	6	3	29	38	52	3.8
PJ24	55+0.670	JCT FAS RTE 271	POWELL	8 61 61	9.806	24	26	PMS	1141	188	184	6	21	10	2	15	54	52	4.5
PJ07	7+0.530	7.4 N JCT FAP 46	RAVALLI	8 40 40	6.016	24	24	BST	751	97	289	0	12	6	10	25	53	54	2.8
PJ02	189+0.034	DEER LODGE	POWELL	8 48 48	1.062	24	32	RMS	1874	243	896	3	13	10	7	26	59	54	.4
PJ02	705+0.694	1.0 W SUPERIOR	MINERAL	8 31 52	1.036	22	24	RMS	210	27	544	0	6	5	5	29	45	55	.6
PJ36	26+0.128	7.2 N SPUR FAP 36	SANDERS	8 40 40	4.999	20	25	BST	457	68	266	0	11	7	6	26	50	55	2.5
PJ35	0+0.000	FAP RTE 7	RAVALLI	8 41 55	5.576	20	24	PMS	349	48	463	0	10	6	4	28	48	55	2.9
PJ06	106+0.153	2.0 W DIXON	SANDERS	8 44 44	1.991	24	24	BST	804	119	538	0	10	8	10	27	55	56	.9
PJ07	76+0.872	MISSOULA CO	MISSOULA	8 74 75	6.047	38	38	PMS	4178	543	344	10	30	10	10	6	66	56	2.1
PJ24	0+0.975	MILLTOWN	MISSOULA	8 74 74	.870	44	44	PMS	2856	471	442	10	30	10	2	14	66	58	.3
PJ02	142+0.345	4.4 E BEARMOUTH	GRANITE	8 33 34	1.595	24	28	PMS	148	19	379	0	8	6	3	29	46	59	.9
PJ02	147+0.035	7.6 W DRUMMOND	GRANITE	8 36 36	3.657	22	32	BST	148	19	201	0	11	6	1	29	47	60	1.9
PJ24	43+0.145	7.5 E POWELL CO	POWELL	8 61 61	12.512	24	26	PMS	1186	195	299	6	19	10	7	20	62	60	4.8
PJ19	34+0.421	2.7 N JCT RTE 35	GRANITE	8 57 57	4.157	32	32	BST	459	66	737	0	10	10	6	29	55	60	1.9
PJ19	30+0.851	.8 S JCT FA RTE 35	GRANITE	8 57 57	.817	32	32	BST	540	78	340	3	16	10	2	27	58	61	.3
PJ02	76+0.550	ALBERTON	MINERAL	8 26 34	.790	20	20	BST	118	15	257	0	13	3	1	29	46	61	.4
PJ02	137+0.241	0.2 E BEARMOUTH	GRANITE	8 33 34	3.680	22	28	RMS	148	19	414	0	11	7	2	29	49	62	1.9
PJ06	2+0.265	2.3 E IDAHO LINE	SANDERS	8 63 63	2.361	28	28	RMS	505	73	312	5	14	9	4	26	58	62	1.0
PJ24	35+0.684	POWELL CO	POWELL	8 61 61	7.494	24	26	PMS	1207	199	316	7	21	10	5	21	64	62	2.7
PJ06	37+0.680	WHITE PINE	SANDERS	8 48 54	8.533	24	28	PMS	706	103	536	3	17	9	6	27	62	63	3.2
PJ02	151+0.444	3.2 W DRUMMOND	GRANITE	8 36 36	1.494	22	32	BST	148	19	336	0	11	7	3	29	50	63	.7
PJ06	10+0.279	JCT FAS 202	SANDERS	8 52 52	1.095	24	28	RMS	558	81	283	6	15	10	4	26	61	64	.4
PJ06	0+0.000	IDAHO LINE	SANDERS	8 52 65	2.260	24	28	RMS	507	74	371	6	16	8	3	27	60	64	.9
PJ07	74+0.821	FLORENCE	RAVALLI	8 52 64	3.629	24	28	RMS	502	73	283	5	17	9	4	26	61	65	1.4
PJ06	29+0.459	TROUT CREEK	SANDERS	8 74 75	2.051	38	38	PMS	3737	485	344	10	30	10	14	9	73	65	.6
PJ35	5+0.606	5.6 E FAP RTE 7	RAVALLI	8 48 54	8.234	24	28	PMS	737	107	569	5	17	9	6	27	64	65	3.0
PJ06	12+0.353	1.0 E BULL RIVER	SANDERS	8 58 58	4.522	26	26	BST	109	15	235	0	13	9	1	29	52	67	2.2
PJ07	72+0.547	1.0 S FLORENCE	RAVALLI	8 58 58	1.214	32	32	BST	590	86	264	7	17	10	6	25	65	68	.4
PJ02	78+0.778	1.5 E MISSOULA CO	MISSOULA	8 74 75	.667	44	44	PMS	3894	506	320	10	30	10	20	6	76	68	.2
PJ02	79+0.448	2.2 E MISSOULA CO	MISSOULA	8 63 63	.670	24	24	RMS	267	34	220	5	17	10	0	28	60	68	.3
PJ19	31+0.677	JCT FAP RTE 35	GRANITE	8 64 64	.585	24	24	RMS	324	42	289	7	16	10	1	28	62	69	.2
PJ24	4+0.910	4.1 E BONNER	MISSOULA	8 57 57	2.729	32	32	BST	509	73	768	0	8	10	18	29	65	69	1.0
PJ06	47+0.218	2.6 E BELKNAP	SANDERS	8 68 68	2.624	40	40	PMS	1906	314	450	8	26	10	10	20	74	70	.7
PJ06	11+0.402	BULL RIVER	SANDERS	8 61 64	2.474	32	32	PMS	820	119	378	8	24	10	3	25	70	70	.7
PJ08	3+0.914	JCT FAS 407	POWELL	8 63 63	.956	28	28	RMS	576	84	342	8	19	10	5	26	68	71	.3
PJ07	83+0.246	0.5 N LOLO	MISSOULA	8 57 64	7.362	32	32	PMS	1353	175	504	8	25	10	6	25	74	71	1.9
PJ36	18+0.961	JCT SPUR FAP 36	SANDERS	8 68 68	6.898	68	68	PMS	5569	723	1968	10	28	10	9	24	81	72	1.3
PJ06	23+0.327	TUSCOR	SANDERS	8 63 63	7.161	28	28	PMS	640	96	586	6	18	10	8	28	70	72	2.1
PJ06	104+0.678	4.5 W DIXON	SANDERS	8 59 64	6.097	32	32	PMS	756	110	672	4	22	10	8	28	72	73	1.7
PJ08	23+0.218	2.3 E ELLISTON	POWELL	8 69 69	.388	32	32	PMS	771	114	571	9	26	10	1	27	73	74	.1
PJ07	66+0.762	JCT FAS 269	RAVALLI	8 73 73	2.363	56	56	PMS	1535	199	1920	9	28	10	2	28	77	74	.5
PJ07	59+0.036	VICTOR FAS 370	RAVALLI	8 56 61	6.777	32	32	PMS	3355	436	720	10	25	10	14	21	80	74	1.4
PJ06	8+0.252	8.2 E IDAHO LINE	SANDERS	8 56 61	7.721	32	32	PMS	2527	328	720	10	25	10	11	23	79	74	1.6
PJ02	83+0.169	0.3 W NINE MILE	MISSOULA	8 63 63	2.033	28	28	RMS	500	73	371	8	18	10	8	27	71	74	.6
PJ24	16+0.029	POTOMAC	MISSOULA	8 64 64	.315	30	30	PMS	509	66	199	10	26	10	0	25	71	74	.1
PJ19	38+0.582	.4 N PHILIPSBURG	GRANITE	8 68 68	6.575	40	40	PMS	1645	271	420	8	23	10	16	20	77	74	1.5
PJ36	16+0.265	JCT FAS RTE 382	SANDERS	8 60 60	9.701	32	32	PMS	491	71	428	5	17	10	11	28	71	74	2.8
PJ35	38+0.629	12.7 E GRANITE CO	GRANITE	8 63 63	2.732	28	28	PMS	652	97	599	5	20	10	9	28	72	74	.8
PJ19	62+0.597	1.0 S DRUMMOND	GRANITE	8 74 74	.840	30	30	GRV	94	15	878	0	0	10	20	30	60	76	.3
PJ02	80+0.033	3.4 W NINE MILE	MISSOULA	8 66 66	.628	40	40	PMS	785	113	240	10	27	10	6	23	76	76	.2
PJ02	152+0.938	1.6 W DRUMMOND	GRANITE	8 39 61	3.136	24	30	RMS	466	60	486	3	14	7	20	28	72	76	.9
				8 64 64	1.554	24	24	PMS	148	19	193	7	17	10	1	29	64	76	.6

FINANCIAL DISTRICT NUMBER 8

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS 8T	IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P002	77+0.340	MISSOULA CO LINE	MISSOULA	8	26	34	1.263	20	20	BST	163	21	186	0	14	3	20	28	65	76	.4
P006	14+0.720	3.4 E BULL RIVER	SANDERS	8	59	64	8.606	32	32	PMS	665	97	428	7	23	10	8	27	75	76	2.2
P002	78+0.603	1.3 E MISSOULA CO	MISSOULA	8	36	45	.175	24	30	RMS	229	29	199	0	14	7	20	28	69	77	.1
P002	143+0.940	6.0 E BEARMOUTH	GRANITE	8	70	70	.617	30	30	PMS	148	19	226	6	20	10	1	29	66	78	.2
P002	145+0.524	9.1 W ORUMMOND	GRANITE	8	36	36	.964	22	32	RMS	148	19	388	0	12	7	20	29	68	79	.3
P002	144+0.557	10.1 W ORUMMOND	GRANITE	8	36	36	.250	22	32	RMS	148	19	432	0	9	10	20	29	68	79	.1
P035	10+0.035	10.1 E FAP RTE 7	RAVALLI	8	66	66	4.539	28	28	BST	91	13	255	5	19	10	1	29	64	79	1.6
P006	46+0.236	1.6 E BELKNAP	SANDERS	8	58	58	.985	32	32	BST	764	111	510	5	17	10	20	27	79	80	.2
P035	45+0.607	8.3 W JCT FAP 19	GRANITE	8	56	72	1.199	22	30	RMS	136	21	537	0	10	10	20	29	69	81	.4
P002	144+0.807	9.8 W ORUMMOND	GRANITE	8	70	70	.672	30	30	PMS	148	19	226	8	23	10	1	29	71	82	.2
P007	74+0.242	0.4 S FLORENCE	RAVALLI	8	74	75	.579	64	64	PMS	3947	513	2160	10	30	10	12	26	88	83	.1
P046	0+0.000	JCT FAP RTE 7	RAVALLI	8	60	63	.105	28	28	PMS	250	37	406	10	28	10	0	29	77	83	
P008	25+0.581	1.9 W L & C CO	POWELL	8	73	73	1.668	56	56	PMS	1552	201	1920	9	28	10	11	28	86	84	.2
P019	63+0.222	0.6 S ORUMMOND	GRANITE	8	66	66	.449	32	32	PMS	712	103	720	10	26	10	9	28	83	84	.1
P006	13+0.530	2.2 E BULL RIVER	SANDERS	8	63	63	1.194	28	28	RMS	605	88	501	8	20	10	20	27	85	86	.2
P002	187+0.906	N DEER LODGE INT	POWELL	8	62	62	.928	36	36	PMS	1920	249	667	9	26	10	20	24	89	86	.1
P002	137+0.085	BEARMOUTH WEST INT	GRANITE	8	70	70	.156	30	30	PMS	148	19	604	10	28	10	0	30	78	87	
P002	151+0.095	3.5 W ORUMMOND	GRANITE	8	64	64	.349	24	24	PMS	148	19	391	6	14	10	20	29	79	87	.1
P002	150+0.700	3.9 W ORUMMOND	GRANITE	8	70	70	.422	30	30	PMS	148	19	459	5	16	10	20	29	80	88	.1
P006	95+0.631	PERMA FAS 382	SANDERS	8	57	75	3.633	32	32	PMS	659	98	448	10	30	8	12	27	87	88	.5
P002	141+0.609	3.9 E BEARMOUTH	GRANITE	8	70	70	.520	30	30	PMS	148	19	291	7	22	5	20	29	83	90	.1
P006	102+0.193	6.6 E PERMA	SANDERS	8	69	69	.754	32	32	PMS	737	109	694	8	26	10	20	28	92	92	.1
P006	90+0.589	4.8 W PERMA	SANDERS	8	69	69	3.542	32	32	PMS	591	88	470	9	27	10	18	27	91	92	.3
P035	46+0.806	7.1 W JCT FAP 19	GRANITE	8	66	66	7.042	30	30	PMS	143	22	410	10	27	10	9	29	85	92	1.1
P002	146+0.488	8.1 W ORUMMOND	GRANITE	8	70	70	.508	30	30	PMS	148	19	448	7	22	10	20	29	88	93	.1
P002	75+0.163	ALBERTON INTCH I90	MINERAL	8	63	63	.005	28	28	PMS	589	76	666	10	27	10	20	28	95	95	
P008	27+0.319	0.3 W L & C CO	POWELL	8			.308	UNDER CONSTRUCTION													
		DISTRICT TOTAL					459.414													45	208.6

DISTRICT 8
PRIMARY SYSTEM

SUFFICIENCY RATING
BY
FINANCIAL DISTRICT 9
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 9

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
P003	463+0.467	OILLON	BEAVERHEAD	9			.699	NON EXISTENT													
P029	83+0.477	JCT FAS 393	SILVER BOW	9			2.500	NON EXISTENT													.7
P050	98+0.016	MADISON CO LINE	MADISON	9			2.448	NON EXISTENT													2.5
P049	3+0.037	3.0 E FAI RTE 15	BEAVERHEAD	9	36	46	3.798	20	24	RMS	1033	134	220	0	11	8	2	21	42	41	2.4
P029	80+0.192	JCT FAS 375	SILVER BOW	9	28	71	3.280	24	30	RMS	1208	157	331	0	11	8	1	23	43	41	2.2
P029	49+0.920	6.6 N TWIN BRIDGES	MADISON	9	36	36	8.509	18	24	RMS	919	137	403	0	10	6	1	25	42	42	1.9
P019	24+0.300	3.4 E GRANITE CO	DEER LODGE	9	34	54	3.379	22	24	RMS	1084	157	197	3	14	7	2	18	44	42	4.9
P013	56+0.524	MCALLISTER	MADISON	9	36	57	5.182	22	24	RMS	689	106	258	0	12	7	1	24	44	46	1.9
P029	34+0.188	SHERIDAN	MADISON	9	39	39	8.029	20	24	RMS	1010	212	486	0	11	8	6	23	48	47	2.9
P029	19+0.904	5.3 N VIRGINIA CTY	MADISON	9	42	42	5.254	20	24	RMS	772	162	390	0	13	8	4	24	49	50	4.2
P029	14+0.827	VIRGINIA CITY	MADISON	9	45	45	5.116	20	24	RMS	857	179	315	4	18	5	3	21	51	51	2.7
P029	75+0.032	SILVER BOW CO LINE	SILVER BOW	9	34	62	2.823	24	30	RMS	543	70	302	0	14	7	0	27	48	51	2.5
P029	77+0.863	2.3 E FAS 375	SILVER BOW	9	28	60	2.337	24	30	RMS	736	95	627	0	14	7	2	28	51	52	1.5
P013	67+0.511	11.1 N MCALLISTER	MADISON	9	34	34	7.349	20	24	RMS	397	61	201	0	13	7	1	25	46	52	1.1
P013	49+0.247	ENNIS	MADISON	9	34	34	7.247	20	24	RMS	835	129	400	0	15	8	4	25	52	52	4.0
P013	47+0.144	9.3 N CAMERON	MADISON	9	36	58	1.492	22	25	RMS	1165	233	601	0	12	9	10	24	55	53	3.5
P029	58+0.396	SILVER BOW CO LINE	SILVER BOW	9	36	63	1.488	22	24	RMS	301	45	540	0	10	5	1	29	45	53	.7
P013	37+0.869	CAMERON	MADISON	9	34	34	9.243	20	24	RMS	623	124	486	0	12	8	5	26	51	54	.8
P013	61+0.592	5.2 N MCALLISTER	MADISON	9	34	34	5.907	20	24	RMS	502	77	205	3	15	8	1	24	51	55	4.5
P029	25+0.175	1.9 N FAS RTE 357	MADISON	9	40	40	7.930	20	24	RMS	711	149	435	0	12	8	8	25	53	55	2.9
P046	65+0.263	0.4 E WISE RIVER	BEAVERHEAD	9	61	61	8.231	26	28	PMS	489	73	311	3	15	6	1	26	51	55	3.7
P049	6+0.804	6.8 E FAI RTE 15	BEAVERHEAD	9	59	59	6.880	24	24	PMS	919	119	220	2	17	10	5	22	56	56	4.0
P049	0+0.579	OILLON	BEAVERHEAD	9	36	62	2.422	26	26	RMS	1088	141	526	0	17	7	8	26	58	56	3.0
P029	43+0.258	TWIN BRIDGES	MADISON	9	39	39	6.634	20	24	RMS	1119	167	420	0	13	5	19	24	61	59	1.0
P029	0+0.245	ENNIS LIMITS	MADISON	9	50	50	5.436	24	24	RMS	681	143	420	5	18	7	2	25	57	59	2.6
P019	16+0.911	4.4 W ANACONDA	DEER LODGE	9	51	59	5.072	28	28	PMS	1714	248	501	4	17	10	10	23	64	59	2.3
P019	22+0.028	9.6 W ANACONDA	DEER LODGE	9	51	59	2.255	32	32	PMS	1482	214	456	0	18	8	15	23	64	60	1.8
P013	27+0.156	10.8 S CAMERON	MADISON	9	34	34	10.807	20	24	RMS	484	96	838	0	10	9	9	28	56	60	.8
P049	13+0.697	MADISON CO LINE	MADISON	9	59	59	2.491	24	24	PMS	900	117	333	0	16	8	12	25	61	61	4.8
P029	5+0.697	5.5 W ENNIS	MADISON	9	51	51	5.030	28	32	RMS	577	121	243	5	17	8	6	23	59	62	1.0
P003	16+0.183	LIMA	BEAVERHEAD	9	33	56	7.602	22	24	RMS	114	14	780	0	10	4	3	30	47	62	2.1
P013	24+0.369	13.3 S CAMERON	MADISON	9	34	34	2.648	20	24	RMS	431	86	871	0	10	7	13	29	59	64	4.0
P019	12+0.378	ANACONDA	DEER LODGE	9	51	59	4.529	28	28	PMS	2049	297	454	4	16	10	20	20	70	65	1.1
P049	0+0.335	DILLON	BEAVERHEAD	9	36	73	.102	40	40	RMS	2872	373	828	5	18	6	20	23	72	65	1.4
P046	58+0.864	.8 E BEAVERHEAD CO	BEAVERHEAD	9	61	61	6.050	26	28	PMS	341	51	327	4	16	8	3	28	59	66	2.5
P049	16+0.192	2.5 E MADISON CO	MADISON	9	53	53	10.659	24	28	RMS	904	117	586	2	14	8	15	27	66	66	3.6
P046	76+0.492	0.6 W DIVIDE	SILVER BOW	9	34	57	.490	32	32	BST	498	74	655	5	17	10	3	28	63	67	.2
P046	51+0.396	DEER LODGE CO LINE	DEER LODGE	9	61	61	5.577	26	28	PMS	283	42	364	5	15	10	2	28	60	68	2.2
P003	133+0.875	N BUTTE LIMITS	SILVER BOW	9	50	50	.292	24	36	PMS	573	74	501	0	10	8	20	28	66	69	.1
P046	41+0.858	DEER LODGE CO LINE	DEER LODGE	9	61	61	9.356	26	28	PMS	286	42	353	6	17	9	2	28	62	70	3.6
P046	56+0.960	SILVER BOW CO LINE	SILVER BOW	9	61	61	1.055	26	28	PMS	230	34	377	5	16	10	2	29	62	71	.4
P047	0+0.000	JCT FAP RTE 19	DEER LODGE	9	49	49	5.992	20	26	RMS	1133	158	535	3	16	8	20	26	73	71	1.6
P003	23+0.785	DELL	BEAVERHEAD	9	33	65	13.236	24	26	RMS	55	.7	965	0	10	5	6	30	51	71	6.5
P046	64+0.920	WISE RIVER	BEAVERHEAD	9	70	70	.398	44	44	PMS	427	64	464	8	21	10	1	28	68	73	.1
P029	10+0.757	2.3 E VIRGINIA CTY	MADISON	9	56	56	2.337	28	28	PMS	569	119	194	5	18	10	20	21	74	76	.6
P046	26+0.350	WISDOM	BEAVERHEAD	9	65	65	5.256	28	28	PMS	299	44	531	8	19	10	5	29	71	77	1.5
P046	1+0.166	IDAHO LINE	BEAVERHEAD	9	60	63	2.945	28	28	PMS	253	37	126	9	23	10	1	26	69	77	.9
P046	58+0.032	BEAVERHEAD CO LINE	BEAVERHEAD	9	61	61	.832	30	33	PMS	250	37	476	6	18	10	6	29	69	77	.3
P046	73+0.646	8.3 E WISE RIVER	BEAVERHEAD	9	68	68	1.323	34	34	PMS	494	74	425	8	27	10	4	27	76	79	.3
P019	5+0.559	JCT FAP RTE 47	DEER LODGE	9	61	61	1.543	76	76	PMS	5537	719	2232	10	26	10	15	25	86	79	.2
P046	75+0.066	SILVER BOW CO LINE	SILVER BOW	9	68	68	1.422	34	34	PMS	496	74	470	9	28	10	2	28	77	80	.3
P019	0+0.000	JCT FAI RTE 90	DEER LODGE	9	64	64	2.889	76	76	PMS	2916	379	2208	9	28	10	12	27	86	82	.4
P046	7+0.770	6.6 E IDAHO LINE	BEAVERHEAD	9	60	63	9.393	28	28	PMS	288	43	395	9	26	10	7	28	80	85	1.9
P019	2+0.896	OPPORTUNITY	DEER LODGE	9	61	61	2.670	76	76	PMS	3878	504	2208	9	26	10	18	27	90	86	.3
P046	31+0.616	5.3 E WISDOM	BEAVERHEAD	9	65	65	5.263	26	26	PMS	288	43	552	8	20	10	15	29	82	87	1.0

FINANCIAL DISTRICT NUMBER 9

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ46	51+0.307	BEAVERHEAD CO LINE	BEAVERHEAD	9	61	61	.089	26	28	PMS	286	42	442	7	18	10	20	29	84	88	
PJ46	36+0.881	4.9 W DEER LODGE CO	BEAVERHEAD	9	65	65	4.966	26	26	PMS	286	42	392	7	21	10	20	28	86	90	.7
PJ13	8+0.630	JCT FAS RTE 499	MADISON	9	66	66	7.813	40	40	PMS	336	67	697	9	27	10	12	29	87	90	1.0
PJ46	4+0.107	2.9 E IDAHO LINE	BEAVERHEAD	9	60	63	3.674	28	28	PMS	260	39	468	7	21	10	20	29	87	91	.5
PJ46	16+0.966	9.2 W WISDOM	BEAVERHEAD	9	62	62	9.226	30	30	PMS	305	45	604	7	23	10	20	29	89	92	1.0
PJ13	21+0.332	9.3 S FAS 527	MADISON	9	71	71	2.992	40	40	PMS	435	87	597	10	28	10	15	28	91	92	.3
PJC3	37+C.026	0.2 S RED ROCK INT	BEAVERHEAD	9	72	72	.211	28	28	PMS	59	7	356	10	30	10	0	30	80	92	
PJ13	16+0.388	7.7 N FAS 499	MADISON	9	69	69	4.975	40	40	PMS	440	88	664	10	26	10	20	28	94	95	.3
PJ13	0+0.000	IDAHO LINE	MADISON	9			8.564	UNDER CONSTRUCTION													
PJ13	74+0.873	HARRISON	MADISON	9			5.908	UNDER CONSTRUCTION													
PJ46	77+0.114	DIVIDE EAST	SILVER BOW	9			.784	UNDER CONSTRUCTION													
		DISTRICT TOTAL					302.349													37	113.4

SUFFICIENCY RATING
BY
FINANCIAL DISTRICT 10
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Const. As Of Dec. 31, 1975

FINANCIAL DISTRICT NUMBER 10

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	ORN	SAF	CAP	TOT	AOJ	DEFIC MILES
								NON EXISTENT													6.6
PJ50	93+0.837	3.0 W RTE 50	GALLATIN	10			6.627														
PJ12	8+0.047	0.6 W WEST YELL	GALLATIN	10	30	30	.571	24	24	RMS	1857	428	739	0	10	3	6	21	40	35	.3
PJ50	81+0.910	JCT FAS 289 291	GALLATIN	10	60	60	5.208	36	36	PMS	4455	668	283	8	26	10	5	0	49	37	2.7
PJ50	90+0.824	SPUR RTE 50	GALLATIN	10	72	72	3.000	34	34	GRV	746	110	535	0	0	10	2	27	39	40	1.8
PJ11	55+0.874	LIVINGSTON	PARK	10	34	34	2.078	20	24	PMS	2257	293	610	0	13	7	4	23	47	40	1.1
PJ50	80+0.057	1.9 S FAS 289 291	GALLATIN	10	64	64	1.857	36	36	PMS	2835	479	264	8	25	10	5	3	51	42	.9
PJ45	0+0.556	81G TIMBER LIMITS	SWEET GRASS	10	34	56	2.201	22	24	RMS	964	125	451	0	10	5	3	26	44	43	1.2
PJC2	315+0.970	4.3 E BELGRADE	GALLATIN	10	37	37	3.683	24	30	PMS	3462	450	601	4	18	10	2	19	53	43	1.7
PJ45	2+0.759	JCT FAS RTE 479	SWEET GRASS	10	35	55	4.588	20	24	RMS	518	67	422	0	9	4	1	28	42	46	2.7
PJ45	45+0.329	JCT. FAR RTE 14	WHEATLAND	10	49	54	3.758	24	24	PMS	963	125	492	0	10	9	2	26	47	46	2.0
PJ45	8+0.030	5.3 N FAS 479	SWEET GRASS	10	42	42	7.745	20	24	RMS	453	58	448	0	9	4	1	28	42	47	4.5
RJ50	47+0.941	JCT SPUR RTE 50	GALLATIN	10	55	55	12.950	28	28	RMS	1459	229	283	5	19	9	1	18	52	48	6.2
PJC2	311+0.654	BELGRADE	GALLATIN	10	22	58	4.314	24	24	RMS	2195	285	514	4	17	8	4	22	55	48	1.9
PJ45	58+0.568	13.3 N HARLOWTON	WHEATLAND	10	49	54	4.288	24	24	PMS	826	107	538	0	10	10	2	27	49	49	2.2
PJ13	94+0.643	1.1 S GALLATIN CO	GALLATIN	10	38	38	1.106	24	28	RMS	719	93	399	0	13	8	2	27	50	51	.6
PJ14	77+0.214	WHEATLAND CO	WHEATLAND	10	34	34	10.825	20	24	BST	424	55	642	0	9	7	1	29	46	51	5.8
PJ14	75+0.152	2.0 W WHEATLAND CO	MEAGHER	10	34	64	2.049	22	24	RMS	428	55	748	0	10	6	2	29	47	52	1.1
PJ11	75+0.395	CLYDE PARK	PARK	10	38	38	5.039	20	24	PMS	567	85	608	0	9	8	4	28	49	52	2.6
PJ11	117+0.536	JCT FAR RTE 14	MEAGHER	10	33	36	8.182	20	24	RMS	645	96	421	0	12	8	4	27	51	53	4.0
PJ14	68+0.503	23.4 E FAP 11	MEAGHER	10	36	52	4.875	22	24	PMS	381	49	280	0	12	7	1	27	47	53	2.6
PJ50	60+0.889	14.7 S FAS RTE 345	GALLATIN	10	67	67	9.312	28	28	RMS	1748	274	203	9	28	10	1	10	58	53	3.9
PJ12	0+0.000	IDAHO LINE	GALLATIN	10	61	61	2.272	34	34	PMS	1234	285	354	5	17	10	6	18	56	54	1.0
RJ11	64+0.559	4.1 N FAI 90	PARK	10	41	41	10.238	20	24	RMS	815	122	431	0	14	9	5	26	54	55	4.7
PJC2	302+0.201	MANHATTAN	GALLATIN	10	22	56	5.494	24	28	RMS	544	70	520	0	14	8	2	28	52	55	2.6
PJC2	291+0.572	0.7 E FAI 90	GALLATIN	10	23	52	2.948	22	26	RMS	459	59	493	0	13	8	1	28	50	55	1.5
RJ14	63+0.148	18.1 E FAP 11	MEAGHER	10	37	48	5.333	20	25	RMS	362	47	290	0	12	8	2	28	50	56	2.7
RJ45	15+0.771	13.0 N FAS 479	SWEET GRASS	10	48	48	7.042	24	31	BST	346	44	414	0	11	9	1	28	49	56	3.6
PJ45	63+0.463	JUDITH GAP	WHEATLAND	10	49	54	.733	24	24	PMS	878	114	289	5	16	10	1	24	56	56	.3
RJ45	33+0.365	5.1 N WHEATLAND CO	WHEATLAND	10	35	39	4.535	20	24	RMS	332	43	431	0	12	7	2	29	50	57	2.3
PJC2	294+0.899	3.6 E FAI 90	GALLATIN	10	31	31	4.747	22	28	RMS	327	42	489	0	12	8	1	29	50	57	2.4
RJ11	109+0.499	JCT FAS RTE 294	MEAGHER	10	36	63	8.034	22	24	RMS	342	51	302	0	13	8	2	27	50	57	4.0
RJ45	49+0.083	3.8 N HARLOWTON	WHEATLAND	10	49	54	9.470	24	24	RMS	766	99	469	0	14	10	6	27	57	58	4.1
PJ13	82+0.226	1.4 N GALLITIN CO	GALLATIN	10	49	52	.830	27	27	RMS	253	39	277	0	13	8	1	28	50	59	.4
RJ28	0+0.000	SILVERGATE	PARK	10	36	72	8.703	22	22	BST	340	76	253	4	18	6	0	25	53	60	4.1
PJ11	105+0.327	0.3 N RINGLING	MEAGHER	10	36	47	4.192	24	24	RMS	307	46	469	0	13	8	2	29	52	60	2.0
PJ11	100+0.703	2.8 MEAGHER CO	MEAGHER	10	31	73	4.600	22	24	PMS	254	38	252	0	12	6	5	28	51	60	2.3
PJC2	299+0.653	1.7 W MANHATTAN	GALLATIN	10	31	31	1.705	22	28	RMS	376	48	603	0	11	8	6	29	54	60	.8
PJ45	23+0.831	4.4 S WHEATLAND CO	SWEET GRASS	10	46	46	4.430	24	26	BST	234	30	561	0	9	9	3	29	50	60	2.2
RJ14	23+0.519	MEAGHER CO	MEAGHER	10	55	55	9.978	24	27	PMS	377	56	308	4	16	9	1	27	57	63	4.3
RJ14	108+0.042	7.1 E FAP 45	WHEATLAND	10	53	53	8.427	24	28	PMS	918	119	558	4	16	10	8	27	65	65	2.9
PJ45	28+0.273	WHEATLAND CO	WHEATLAND	10	46	46	5.073	25	26	BST	230	29	398	0	13	10	3	29	55	65	2.3
PJ13	96+0.554	THREE FORKS	GALLATIN	10	50	55	.555	32	32	RMS	1449	188	808	2	12	8	20	27	69	66	.2
PJC2	307+0.688	3.0 W BELGRADE	GALLATIN	10	23	59	3.045	24	24	PMS	695	90	603	0	15	6	15	28	64	66	1.1
PJ12	2+0.270	2.3 E IDAHO LINE	GALLATIN	10	61	61	5.777	34	34	RMS	1395	322	680	6	19	10	12	23	70	67	1.7
PJ50	8+0.524	0.2 N FAS 499	GALLATIN	10	62	72	1.955	32	32	PMS	827	129	182	10	27	10	1	19	67	67	.6
PJ50	31+0.181	YELL PARK BDY	GALLATIN	10	60	60	8.921	28	28	RMS	815	127	436	7	21	10	4	26	68	68	2.9
PJ11	62+0.267	1.8 N FAI 90	PARK	10	41	41	2.293	20	24	RMS	1010	151	453	0	15	9	20	25	69	68	.7
PJ11	60+0.481	JCT FAI RTE 90	PARK	10	55	55	1.755	24	36	RMS	1155	173	580	7	18	10	9	26	70	68	.5
PJ11	49+0.902	JCT FAS 540	PARK	10	61	61	1.890	32	32	PMS	1824	392	748	9	25	10	6	22	72	68	.5
PJ11	75+0.310	CLYDE PARK	PARK	10	38	38	.061	20	24	RMS	597	89	582	0	11	8	20	28	67	69	
PJ50	40+0.132	8.9 N PARK BDY	GALLATIN	10	60	60	7.823	28	28	PMS	913	143	436	7	22	10	5	25	69	69	2.4
PJ50	8+0.373	JCT FAS PTE 499	GALLATIN	10	64	64	.151	52	52	PMS	879	138	296	9	26	10	1	23	69	69	
PJC2	324+0.334	BOZEMAN	GALLATIN	10	52	54	1.498	24	32	PMS	410	53	860	5	18	8	5	29	65	70	.5
PJ02	290+0.326	JCT FAI RTE 90	GALLATIN	10	64	69	.852	32	32	PMS	518	67	681	7	21	10	1	29	68	71	.3
PJ11	0+0.000	YELL PARK BDRY	PARK	10	75	75	1.016	48	48	PMS	1323	284	568	10	30	10	0	23	73	71	.3

FINANCIAL DISTRICT NUMBER 10

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH RDY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY FNO	SUFFICIENCY SPF	SUFFICIENCY CRN	SUFFICIENCY SAF	SUFFICIENCY CAP	SUFFICIENCY TCT	SUFFICIENCY ADJ	DEFIC MILES
P014	73+0.390	28.3 E FAP 11	MEAGHER	10	36	52	1.779	22	24	RMS	393	51	544	0	12	7	18	29	66	71	.6
P011	154+0.339	3.3 S CASCADE CO	MEAGHER	10	59	63	3.335	40	40	PMS	305	45	890	6	19	10	1	29	65	72	1.2
P050	0+0.557	WEST YELLOWSTONE	GALLATIN	10	68	68	7.126	40	40	PMS	1518	333	288	9	25	10	18	13	75	72	1.8
P050	70+0.196	5.6 S FAS 345	GALLATIN	10	58	60	6.250	32	32	PMS	1933	338	696	9	25	10	10	23	77	73	1.4
P011	97+1.030	MEAGHER CO	MEAGHER	10	42	52	2.756	24	24	RMS	243	36	774	0	10	8	18	29	65	73	1.0
P011	126+0.708	WHITE SULPHUR	MEAGHER	10	65	65	2.417	40	40	PMS	810	121	320	8	22	10	10	24	74	74	.6
P014	55+0.903	10.8 E FAP 11	MEAGHER	10	56	58	7.271	28	28	PMS	362	47	415	3	17	10	10	28	68	74	2.3
P050	15+0.000	6.7 N FAS 499	GALLATIN	10	63	63	1.642	32	32	PMS	763	119	182	6	17	10	20	20	73	74	.4
P011	10+0.864	10.7 N GARDINER	PARK	10	69	69	5.766	32	32	BST	822	176	546	10	28	10	2	25	75	75	1.4
P011	40+0.712	3.5 N FAS 476	PARK	10	65	65	9.177	32	32	PMS	1183	254	748	9	26	10	7	25	77	75	2.1
P050	76+0.436	0.7 N FAS 345	GALLATIN	10	64	64	3.598	32	32	PMS	2438	463	720	8	26	10	18	20	82	77	.6
P014	116+0.455	6.1 W GOLD VAL	WHEATLAND	10	67	67	6.108	40	40	PMS	797	103	281	8	24	10	11	25	78	78	1.3
P014	100+0.394	HARLOWTON	WHEATLAND	10	65	65	.504	40	40	PMS	1560	202	937	9	25	10	10	27	81	78	.1
P014	100+0.898	JCT FAP RTE 45	WHEATLAND	10	65	65	7.126	40	40	PMS	1025	133	281	8	25	10	14	23	80	79	1.4
P013	93+0.693	GALLATIN CO LINE	GALLATIN	10	49	49	1.107	28	28	RMS	628	81	629	3	16	10	20	28	77	79	.3
P011	138+0.718	9.5 N FAP 14	MEAGHER	10	59	63	7.386	26	26	PMS	350	52	418	8	23	10	6	28	75	80	1.8
P002	325+0.832	1.5 E BOZEMAN	GALLATIN	10	71	71	.696	28	28	PMS	435	56	554	9	27	10	3	28	77	80	.2
P014	92+0.813	6.5 W HARLOWTON	WHEATLAND	10	68	68	6.513	40	40	PMS	631	82	344	8	24	10	12	26	80	81	1.3
P050	16+0.625	8.3 N FAS 499	GALLATIN	10	63	63	14.593	32	32	PMS	763	119	599	6	18	10	20	27	81	81	2.8
P011	1+0.362	1.3 N GARDINER	PARK	10	71	71	4.311	34	34	PMS	1137	244	511	9	27	10	14	23	83	82	.7
P002	319+0.633	8.0 E BELGRADE	GALLATIN	10	66	66	.198	68	68	PMS	6973	906	1840	9	27	10	20	23	89	83	
P014	88+0.033	JCT FAS RTE 296	WHEATLAND	10	66	66	4.784	40	40	PMS	488	63	344	8	23	10	12	27	80	83	1.0
P050	7+0.330	7.2 N WEST YELL	GALLATIN	10	64	64	1.047	34	34	PMS	1300	286	720	8	23	10	20	24	85	83	.2
P050	10+0.485	2.4 N FAS 499	GALLATIN	10	63	63	4.378	32	32	PMS	763	119	470	7	21	10	20	26	84	84	.7
P011	129+0.138	JCT FAP RTE 14	MEAGHER	10	55	69	9.550	28	28	PMS	361	54	472	9	28	10	5	28	80	84	1.9
P011	80+0.487	5.1 N CLYDE PARK	PARK	10	73	73	8.993	32	32	PMS	434	65	643	9	28	10	7	28	82	85	1.6
P011	146+0.022	11.6 S CASCADE CO	MEAGHER	10	59	63	8.316	26	26	PMS	329	49	418	7	23	10	17	28	85	88	1.2
P011	30+0.977	JCT FAS RTE 362	PARK	10	61	61	9.708	32	32	PMS	1057	227	748	9	27	10	19	25	90	89	1.6
P014	45+0.138	JCT FAP RTE 11	MEAGHER	10	65	65	3.943	40	40	PMS	399	51	255	7	22	10	20	27	86	89	.6
P013	97+0.115	0.6 E THREE FORKS	GALLATIN	10	64	69	.217	32	32	PMS	1446	187	457	9	28	10	20	24	91	89	
P045	37+6.865	6.0 S HARLOWTON	WHEATLAND	10	70	70	5.994	32	32	PMS	475	61	672	9	24	10	17	29	89	90	.7
P011	19+0.339	11.6 S FAS 362	PARK	10	61	61	11.618	32	32	PMS	852	183	748	9	27	10	20	26	92	92	.9
P011	5+0.566	5.0 N GARDINER	PARK	10	69	69	5.149	34	34	PMS	877	188	596	10	28	10	20	25	93	93	.4
P011	16+0.633	14.3 S FAS 362	PARK	10	61	61	2.712	32	32	PMS	794	170	748	10	28	10	18	27	93	93	.2
P011	1+0.019	GARDINER NO	PARK	10	75	75	.343	34	34	PMS	1319	283	774	10	30	10	20	25	95	94	
P045	7+0.339	4.6 N FAS 479	SWEET GRASS	10	69	69	.695	30	30	RMS	477	62	549	9	26	10	20	28	93	94	
P045	22+0.798	5.4 S WHEATLAND CO	SWEET GRASS	10	69	69	1.029	30	30	RMS	261	33	329	10	26	10	20	28	94	96	.1
P011	89+0.649	8.3 S MEAGHER CO	PARK	10	73	73	8.381	32	32	PMS	238	35	643	10	30	10	15	29	94	96	.5
P013	80+6.762	GALLATIN CO LINE	GALLATIN	10			1.444	UNDER CONSTRUCTION													
P014	48+0.995	3.9 E FAP 11	MEAGHER	10			6.935	UNDER CONSTRUCTION													
		DISTRICT TOTAL					445.527														34 152.7

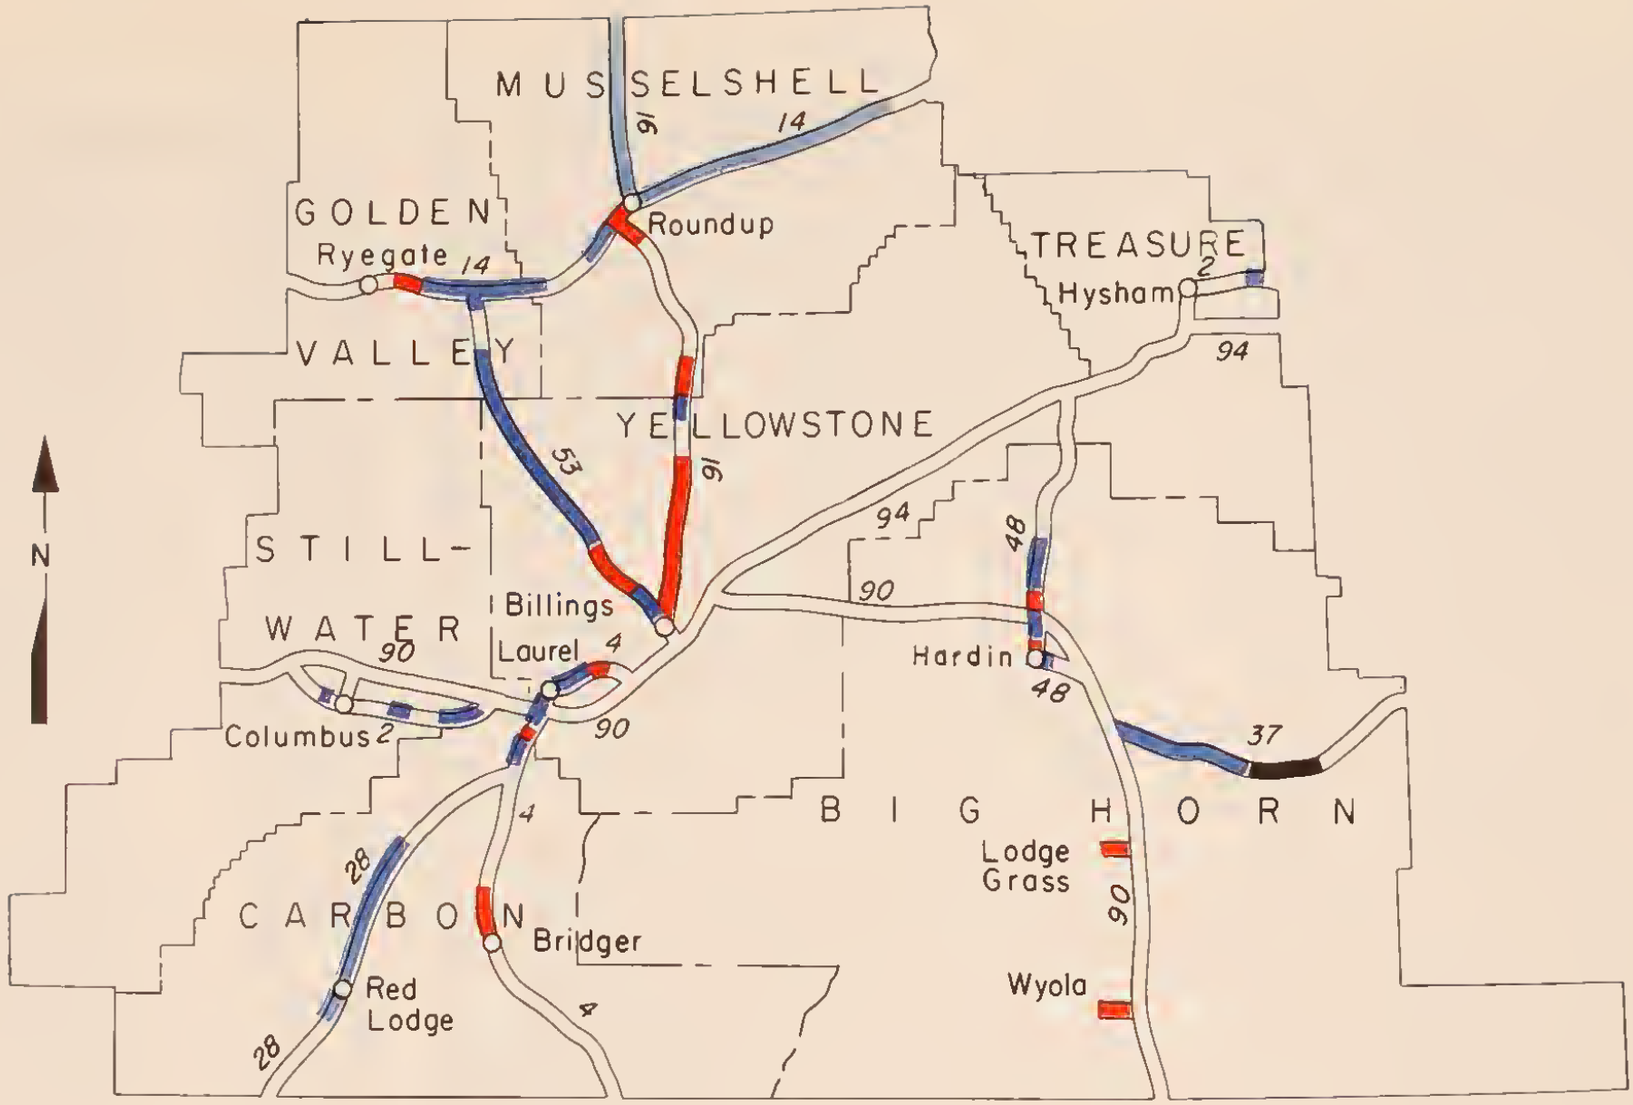

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

SUFFICIENCY RATING BY FINANCIAL DISTRICT II

RURAL PRIMARY SYSTEM

FINANCIAL DISTRICT NUMBER 11

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS PT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SUFFICIENCY RATINGS SRF	SUFFICIENCY RATINGS ORN	SUFFICIENCY RATINGS SAF	SUFFICIENCY RATINGS CAP	SUFFICIENCY RATINGS TOT	SUFFICIENCY RATINGS ADJ	DEFIC MILES
PJ16	311+0.617	LODGE GRASS	BIG HORN	11			1.000	NON EXISTENT													1.0
PJ16	312+0.617	WYOLA	BIG HORN	11			1.300	NON EXISTENT													1.3
PJ48	0+1.906	HARDIN	BIG HORN	11			.492	NON EXISTENT													.5
PJ04	52+0.255	1.4 N YELLOWST CO	YELLOWSTONE	11	22	39	1.598	24	30	RMS	5382	699	652	3	15	7	2	14	41	28	.9
PJ14	167+0.532	JCT FAP RTE 16	MUSSELSHELL	11	33	56	.969	26	30	RMS	2573	334	780	0	10	6	1	24	41	33	.6
PJ16	108+0.821	FAP 2 N BILLINGS	YELLOWSTONE	11	34	51	5.074	20	24	BST	1565	203	396	0	10	5	1	22	38	34	3.1
PJ04	57+0.393	2.1 E LAUREL	YELLOWSTONE	11	23	68	.593	55	55	RMS	2658	345	289	3	18	8	1	12	42	34	.3
PJ14	133+0.003	2.5 E RYEGATE	GOLDEN VALLEY	11	37	55	3.979	21	24	RMS	568	125	147	0	13	6	1	17	37	36	2.5
PJ48	1+0.060	JCT FAI 90	BIG HORN	11	70	70	.284	40	40	RMS	1743	244	120	7	23	10	1	0	41	36	.2
PJ16	113+0.903	5.0 N FAP 2	YELLOWSTONE	11	34	51	11.673	20	24	BST	1167	151	255	0	11	6	1	21	39	37	7.1
PJ16	150+0.202	KLEIN	MUSSELSHELL	11	32	32	1.838	20	24	BST	1563	203	283	0	13	8	1	19	41	37	1.1
PJ53	6+0.368	2.0 N BILLINGS	YELLOWSTONE	11	48	48	9.590	20	24	RMS	1161	150	185	0	13	8	1	18	40	38	5.8
PJ16	129+0.140	MUSSELSHELL CO	MUSSELSHELL	11	34	34	4.505	22	24	RMS	1149	149	502	0	9	6	1	26	42	40	2.6
PJ04	26+0.285	BRIDGER	CARBON	11	23	51	6.413	22	24	RMS	1818	236	453	0	13	6	4	22	45	40	3.5
PJ16	161+0.094	6.0 N ROUNDUP	MUSSELSHELL	11	35	35	9.033	20	24	BST	832	108	425	0	7	4	4	26	41	41	5.3
PJ16	127+0.243	1.8 S MUSSEL CO	YELLOWSTONE	11	34	58	1.815	22	24	RMS	1107	143	272	0	13	7	1	22	43	41	1.0
PJ48	0+0.294	0.3 S FAI 90	BIG HORN	11	34	59	.893	24	24	RMS	3505	455	664	0	8	4	20	20	52	42	.4
PJ28	64+0.237	4.5 S RED LODGE	CARBON	11	34	57	4.147	22	22	RMS	783	176	591	0	8	8	1	26	43	44	2.4
PJ28	70+0.311	RED LODGE	CARBON	11	21	54	11.712	22	24	RMS	1202	240	544	0	11	8	5	23	47	45	6.2
PJ16	170+0.113	15.0 N ROUNDUP	MUSSELSHELL	11	35	35	5.780	20	24	BST	638	82	425	0	9	5	2	27	43	45	3.3
PJ53	32+0.044	BROADVIEW	YELLOWSTONE	11	48	48	2.172	20	24	RMS	885	115	220	0	15	7	1	22	45	45	1.2
PJ53	34+0.273	GOLDEN VALLEY CO	GOLDEN VALLEY	11	48	48	6.295	24	28	BST	927	120	289	0	14	8	1	24	47	47	3.3
PJ37	0+0.000	JCT FAI RTE 90	BIG HORN	11	54	54	7.865	24	24	PMS	810	109	217	0	11	8	5	22	46	47	4.2
PJ14	137+0.000	6.5 E RYEGATE	GOLDEN VALLEY	11	37	55	9.103	21	24	RMS	874	113	312	0	11	8	3	25	47	47	4.8
PJ28	82+0.066	ROBERTS	CARBON	11	36	36	8.931	21	24	RMS	1165	233	486	0	13	8	5	23	49	47	4.6
PJ53	18+0.839	JCT FAS RTE 328	YELLOWSTONE	11	48	48	12.745	20	24	RMS	939	122	354	0	11	9	3	25	48	48	6.6
PJ04	50+0.813	YELLOWSTONE CO	YELLOWSTONE	11	49	65	1.390	28	32	PMS	4336	563	616	4	18	9	14	16	61	50	.5
PJ04	42+0.924	0.2 N FAP 28	CARBON	11	49	65	7.960	24	32	RMS	3814	495	580	5	18	10	11	17	61	51	3.1
PJ04	55+0.309	LAUREL	YELLOWSTONE	11	23	68	2.084	55	55	RMS	2868	372	872	5	18	8	4	24	59	51	.9
PJ04	53+0.841	3.0 N YELLOWST CO	YELLOWSTONE	11	64	64	.432	68	68	PMS	6068	788	1424	7	22	10	4	22	65	52	.2
PJ04	42+0.765	JCT FAP 28	CARBON	11	68	68	.159	40	40	PMS	3777	491	432	9	27	10	3	13	62	52	.1
PJ14	146+0.071	JCT FAP RTE 53	GOLDEN VALLEY	11	37	37	5.631	20	26	RMS	250	32	393	0	9	4	1	29	43	52	3.2
PJ14	182+0.021	11.9 E ROUNDUP	MUSSELSHELL	11	39	65	5.582	21	24	RMS	432	56	210	0	12	8	1	26	47	52	3.0
PJ53	15+0.901	ACTON	YELLOWSTONE	11	48	48	2.957	20	24	RMS	1009	131	354	0	13	9	7	24	53	52	1.4
PJ37	7+0.879	7.9 E JCT FAI 90	BIG HORN	11	54	54	9.342	24	24	PMS	776	104	418	0	10	8	7	26	51	52	4.6
PJ37	24+0.492	BUSBY	BIG HORN	11	54	54	2.713	24	24	PMS	948	127	593	0	10	10	7	27	54	53	1.2
PJ48	1+0.344	0.8 N HARDIN	BIG HORN	11	41	41	5.460	20	24	RMS	1023	143	345	0	14	8	8	24	54	53	2.5
PJ14	151+0.679	MUSSELSHELL CO	MUSSELSHELL	11	37	37	3.424	20	26	RMS	231	30	393	0	9	4	1	29	43	53	2.0
PJ16	155+0.020	ROUNDUP	MUSSELSHELL	11	50	54	5.953	24	30	PMS	1074	139	340	0	13	10	7	24	54	53	2.7
PJ02	419+0.341	1.5 W COLUMBUS	STILLWATER	11	31	56	1.535	22	30	RMS	484	62	427	0	13	7	1	28	49	53	.8
PJ14	187+0.619	17.5 E ROUNDUP	MUSSELSHELL	11	39	39	4.478	20	24	RMS	418	54	354	0	11	8	2	28	49	54	2.3
PJ14	160+0.456	7.1 W FAP RTE 16	MUSSELSHELL	11	36	50	7.063	21	25	RMS	416	54	608	0	10	6	5	29	50	55	3.5
PJ37	17+0.211	17.2 E JCT FAI 90	BIG HORN	11	54	54	7.297	24	24	PMS	806	108	196	0	12	8	12	22	54	55	3.4
PJ14	170+0.161	ROUNDUP	MUSSELSHELL	11	39	39	11.871	20	24	RMS	580	75	333	0	14	10	2	27	53	56	5.6
PJ14	192+0.108	JCT FAS 310	MUSSELSHELL	11	39	39	3.283	20	24	RMS	358	46	357	0	9	8	5	28	50	57	1.6
PJ28	68+0.573	RED LODGE	CARBON	11	34	57	.117	22	24	RMS	1336	300	595	0	10	8	20	22	60	57	
PJ02	426+0.083	2.4 E KEATING RD	STILLWATER	11	28	57	6.780	22	26	RMS	277	36	462	0	15	5	1	29	50	58	3.4
PJ02	548+0.875	8.0 E HYSHAM	TREASURE	11	33	56	2.508	22	24	RMS	172	22	280	0	11	6	1	29	47	59	1.3
PJ02	433+0.400	5.9 W PARK CITY	STILLWATER	11	28	55	5.699	24	26	RMS	394	51	585	2	16	4	2	29	53	59	2.7
PJ48	0+2.579	HARDIN	BIG HORN	11	70	70	.161	40	40	RMS	2992	418	299	7	21	10	20	9	67	59	.1
PJ53	4+0.315	BILLINGS	YELLOWSTONE	11	63	63	2.024	32	32	PMS	2236	290	565	9	21	10	4	22	66	60	.7
PJ53	46+0.272	LAVINA	GOLDEN VALLEY	11	56	56	.417	30	30	BST	943	122	535	3	13	10	8	27	61	60	.2
PJ04	54+0.307	JCT FAI 90	YELLOWSTONE	11	64	64	.224	68	68	PMS	4194	545	1424	8	24	10	4	24	70	60	.1
PJ14	195+0.388	3.3 E FAS 310	MUSSELSHELL	11	39	39	8.309	20	24	RMS	461	59	354	0	12	9	6	28	55	60	3.7
PJ14	130+0.503	RYEGATE	GOLDEN VALLEY	11	37	53	2.478	21	24	RMS	1097	142	333	3	13	6	20	24	63	61	.9

FINANCIAL DISTRICT NUMBER 11

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	AOT	OHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ14	124+0.946	2.4 E GOLD VAL CO	GOLDEN VALLEY	11	56	71	4.540	28	28	PMS	548	123	558	3	16	10	6	27	62	61	1.7
PJ04	57+0.986	2.7 E LAUREL	YELLOWSTONE	11	64	64	.213	30	30	RMS	2595	337	506	10	28	10	0	20	68	61	.1
PJC2	423+0.152	1.5 W COLUMBUS	STILLWATER	11	35	53	2.940	24	28	RMS	191	24	348	0	13	7	1	29	50	61	1.5
PJ02	412+0.892	0.3 E SPRINGT INT	STILLWATER	11	31	59	5.347	24	30	RMS	245	31	522	2	15	5	2	29	53	62	2.5
PJ14	155+0.157	3.4 E MUSSELS CO	MUSSELSHELL	11	56	56	2.851	24	28	PMS	236	30	530	0	10	9	4	29	52	62	1.4
PJ28	101+0.121	0.6 S FAP 4	CARBON	11	68	68	.587	40	40	PMS	1679	335	309	7	24	10	12	14	67	63	.2
PJ02	540+0.855	HYSHAM	TREASURE	11	33	56	8.004	22	24	RMS	236	30	544	0	13	7	5	29	54	64	3.7
PJ02	417+0.827	2.9 W COLUMBUS	STILLWATER	11	51	51	1.376	34	34	BST	321	41	426	2	13	8	5	29	57	64	.6
PJ04	13+0.436	13.4 N WYO LINE	CARBON	11	59	59	5.773	32	32	PMS	868	112	599	0	15	10	14	27	66	66	2.0
PJ28	47+0.309	2.3 N WYO BORY	CARBON	11	65	65	6.415	28	28	PMS	487	109	394	7	20	10	0	26	63	67	2.4
PJ28	96+0.673	JOLIET	CARBON	11	74	74	4.685	44	44	RMS	1490	298	344	10	30	10	3	17	70	67	1.4
PJ53	40+0.546	6.3 N GOLD VAL CO	GOLDEN VALLEY	11	56	56	4.843	30	30	BST	937	121	355	0	13	10	20	25	68	68	1.5
PJ37	33+0.065	5.6 W ROSEBUD CO	BIG HORN	11	74	74	5.621	40	40	PMS	1140	153	135	10	25	10	12	13	70	68	1.7
PJ28	53+0.726	8.7 N WYO BORY	CARBON	11	65	65	6.274	28	28	PMS	552	124	591	7	21	10	1	27	66	69	2.1
PJ04	0+0.516	0.5 N WYO LINE	CARBON	11	56	63	12.924	32	32	PMS	838	108	569	4	18	10	10	27	69	69	4.0
PJ28	45+0.000	MONT WYO BORY	CARBON	11	65	65	2.331	28	28	PMS	442	99	408	8	21	10	1	26	66	70	.8
PJ28	90+0.985	BOYD	CARBON	11	74	74	4.433	40	40	PMS	1324	264	309	10	30	10	7	17	74	72	1.2
PJ16	142+0.172	8.0 MI S KLEIN	MUSSELSHELL	11	65	65	8.038	32	32	PMS	1416	184	720	7	23	10	9	26	75	72	2.0
PJC4	33+0.199	FROMBERG	CARBON	11	54	54	.599	24	32	RMS	1902	247	896	4	16	10	20	26	76	72	.1
PJ14	205+0.177	MELSTONE	MUSSELSHELL	11	46	46	1.991	24	24	BST	397	63	620	0	10	10	20	28	68	73	.6
PJ16	133+0.682	4.5 N MUSSELSH CO	MUSSELSHELL	11	66	66	8.466	32	32	PMS	1261	163	548	8	24	10	8	26	76	74	2.0
PJ02	421+0.620	COLUMBUS	STILLWATER	11	47	63	1.520	24	30	RMS	253	32	348	4	15	8	10	29	66	74	.5
PJ02	538+0.971	I94 S HYSHAM	TREASURE	11	64	64	2.514	30	30	PMS	589	76	664	6	24	10	5	28	73	75	.7
PJ04	0+0.000	WYOMING LINE	CARBON	11	49	49	.516	24	30	RMS	841	109	648	8	21	10	10	27	76	76	.1
PJ48	0+0.000	JCT FAI 90	BIG HORN	11	71	71	.294	40	40	PMS	3505	455	464	9	28	10	20	15	82	76	.1
PJ48	11+0.643	11.0 N HARDIN	BIG HORN	11	54	54	6.665	24	24	RMS	271	37	429	4	16	10	10	29	69	76	2.1
PJ02	713+0.306	COLUMBUS	STILLWATER	11	72	72	.433	44	44	PMS	1531	199	795	10	30	10	4	26	80	77	.1
PJ04	33+0.798	0.6 N FROMBERG	CARBON	11	68	68	8.920	40	40	PMS	2082	270	696	8	25	10	15	24	82	78	1.6
PJ48	6+0.777	6.1 N HARDIN	BIG HORN	11	45	45	4.865	20	24	RMS	372	52	333	2	15	9	20	28	74	79	1.3
PJ02	432+0.872	6.5 W PARK CITY	STILLWATER	11	55	55	.530	24	32	RMS	340	44	731	3	14	10	20	29	76	81	.1
PJ16	125+0.519	3.5 S MUSSEL CO	YELLOWSTONE	11	68	68	1.739	40	40	PMS	1100	143	403	8	27	10	12	25	82	81	.3
PJ14	158+0.003	6.3 E MUSSELS CO	MUSSELSHELL	11	56	56	2.482	24	28	RMS	241	31	586	3	15	10	17	29	74	81	.6
PJ04	23+0.235	2.4 S BRIDGER	CARBON	11	72	72	2.441	40	40	PMS	1577	205	266	9	28	10	20	18	85	83	.4
PJ48	18+0.320	4.4 S YELLOWSTONE	BIG HORN	11	63	63	4.366	28	28	PMS	272	38	312	9	27	10	4	28	78	84	1.0
PJ48	29+0.507	0.3 S JCT I 94	YELLOWSTONE	11	74	74	.302	34	34	PMS	306	42	351	10	30	10	2	28	80	85	.1
PJ02	412+0.631	SPRINGTIME INTCH	STILLWATER	11	72	72	.261	30	30	PMS	182	23	289	10	28	10	1	29	78	86	.1
PJ04	19+0.206	6.5 S BRIDGER	CARBON	11	72	72	4.035	32	32	PMS	1008	131	448	8	28	10	16	26	88	87	.5
PJ14	122+0.568	GOLDEN VALLEY CO	GOLDEN VALLEY	11	67	67	2.375	40	40	RMS	835	108	296	8	25	10	20	25	88	88	.3
PJ28	60+0.000	8.7 S RED LODGE	CARBON	11	69	69	4.227	34	34	RMS	595	133	522	9	26	10	20	26	91	92	.4
PJ48	22+0.705	YELLOWSTONE CO	YELLOWSTONE	11	63	63	3.682	28	28	PMS	282	39	294	9	27	10	18	28	92	94	.3
PJ02	439+0.123	PARK CITY	STILLWATER	11	67	67	.237	34	34	PMS	446	57	383	10	26	10	20	28	94	95	
PJ48	26+0.401	3.7 N YELLOWST CO	YELLOWSTONE	11	63	63	3.103	28	28	PMS	294	41	504	10	27	10	20	29	96	97	.1
PJ37	27+0.204	2.7 E BUSBY	BIG HORN	11			5.843	UNDER CONSTRUCTION													
		DISTRICT TOTAL					406.753													42	173.1

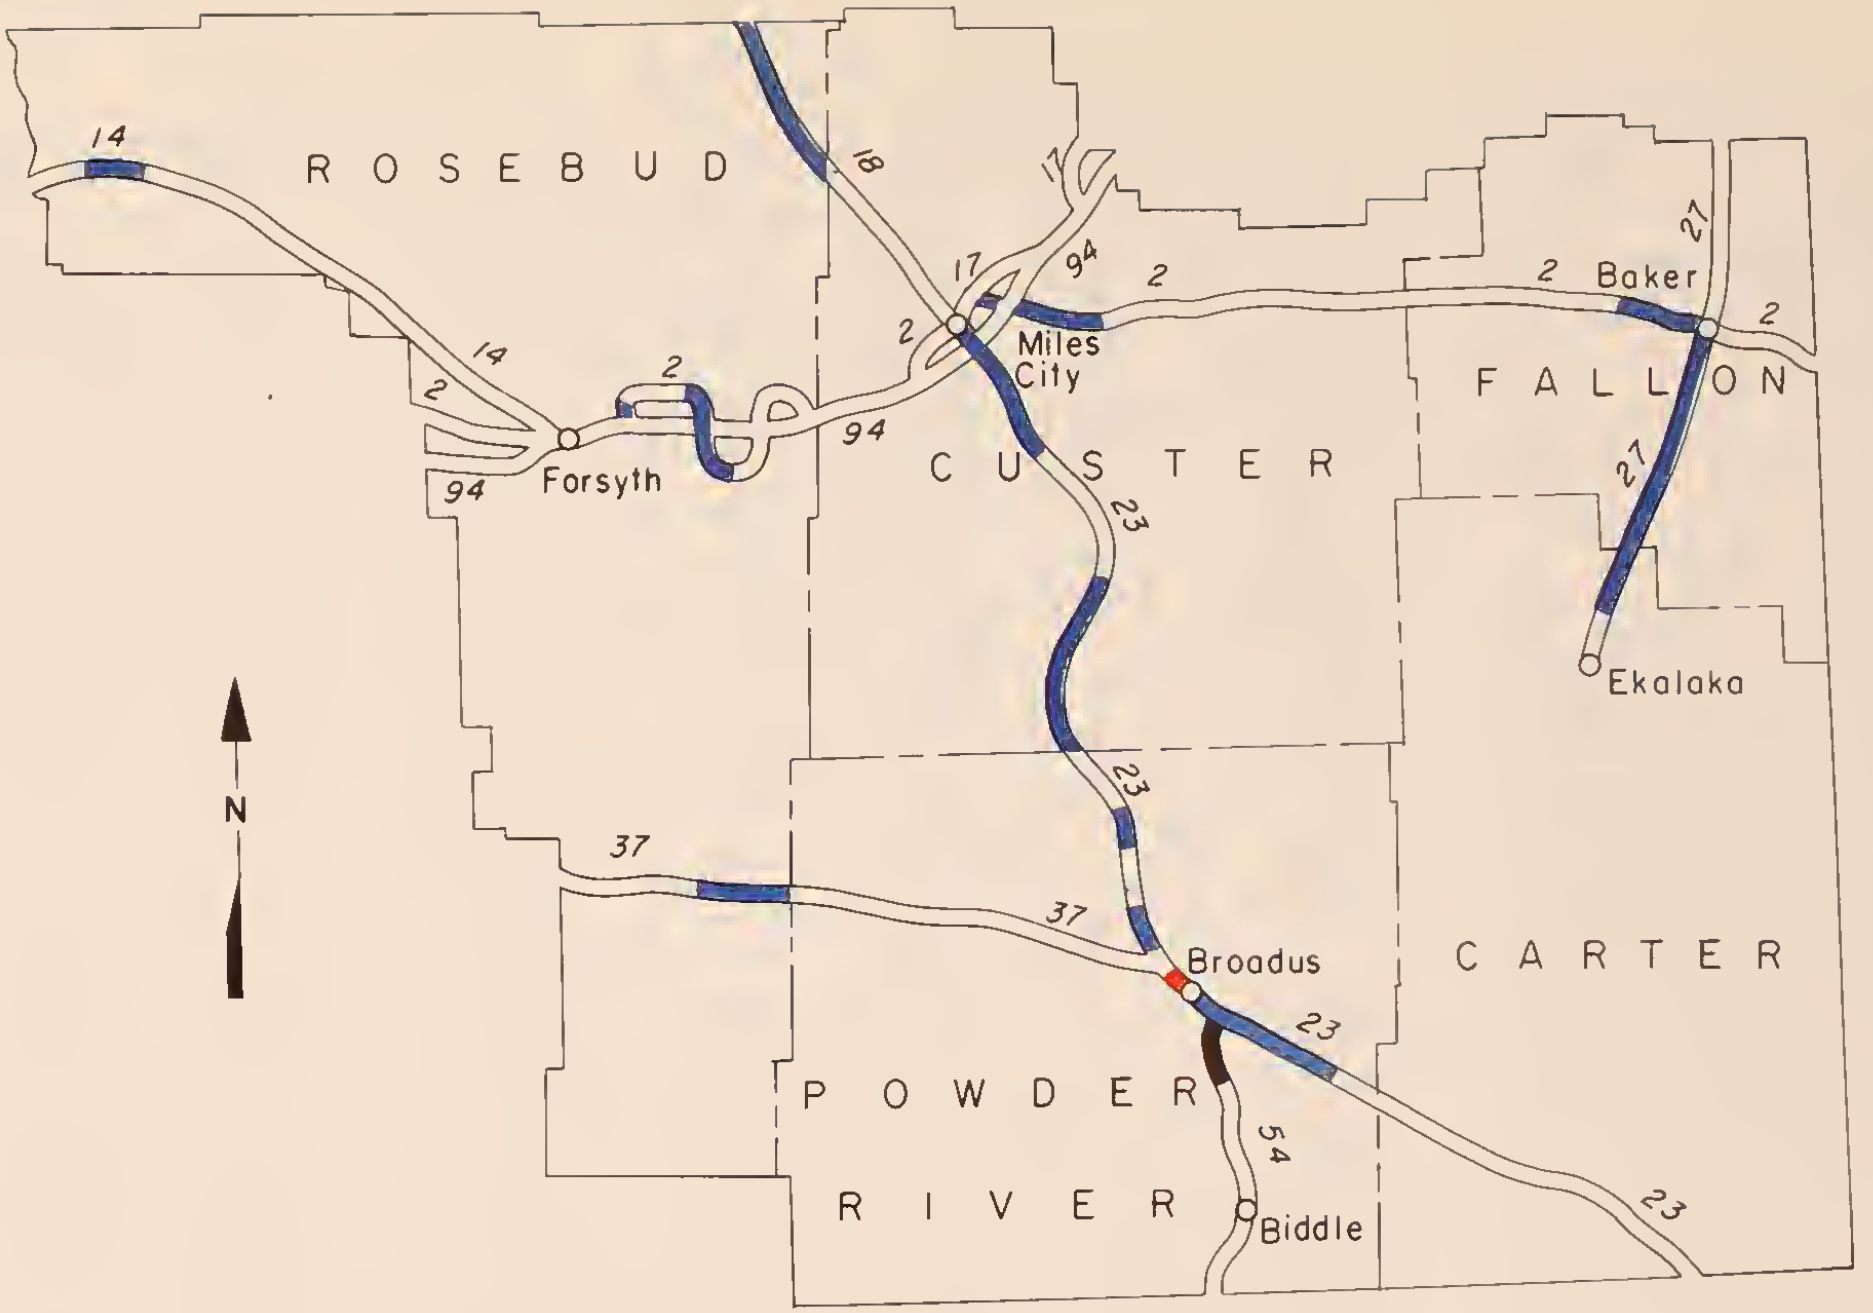

SUFFICIENCY RATING BY FINANCIAL DISTRICT 12
RURAL PRIMARY SYSTEM

Percent Sufficient

- 0 - 40
- 41 - 60
- 61 - 100
- Under Construction As Of December 31, 1975

FINANCIAL DISTRICT NUMBER 12

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	SUF PDY	TYP	AOT	OHV	SERVICE VOLUME	---SUFFICIENCY RATINGS--- FND	SRF	OPN	SAF	CAP	TOT	ADJ	DEFIC MILES
PD23	77+0.811	1.5 S FAP 37	POWDER RIVER	12	28	36	1.305	20	22	BST	1484	215	250	0	13	4	1	17	35	31	.8
PD37	46+0.552	4.2 E LAME DEER	ROSEBUD	12	54	54	7.110	24	24	PMS	943	127	120	3	16	8	2	14	43	42	4.1
PD23	2+0.172	JCT FAI RTE 94	CUSTER	12	20	36	3.282	22	25	RMS	1078	140	348	0	11	8	1	24	44	43	1.8
PD23	5+0.439	3.3 S FAI RTE 94	CUSTER	12	36	36	9.137	22	25	RMS	705	102	425	0	10	7	2	26	45	47	5.0
PD23	44+0.152	6.4 N POWDER R CO	CUSTER	12	32	60	3.713	18	24	RMS	368	53	316	0	9	4	2	27	42	48	2.2
PD02	680+0.897	PLEVNA	FALLON	12	39	39	11.725	24	30	RMS	732	95	259	0	11	10	2	24	47	48	6.2
PD23	83+0.090	JCT FAP RTE 54	POWDER RIVER	12	31	56	2.448	20	24	RMS	552	80	203	0	13	7	3	24	47	50	1.3
PD23	79+0.733	BROADUS	POWDER RIVER	12	40	40	3.380	24	24	RMS	1040	150	297	0	13	9	8	22	52	51	1.6
PD27	29+0.146	JCT FAS RTE 322	FALLON	12	48	48	5.510	25	25	BST	575	74	441	0	10	9	2	27	48	51	2.9
PD23	33+0.348	17.2 N POWDER R CO	CUSTER	12	31	47	10.796	20	24	BST	383	55	469	0	8	4	5	28	45	51	5.9
PD02	616+0.886	0.7 E JCT FAI 94	CUSTER	12	50	50	6.326	20	24	RMS	668	86	210	0	15	9	1	24	49	51	3.2
PD02	578+0.211	JCT FAS 446	ROSEBUD	12	31	47	1.731	20	26	RMS	264	34	335	0	9	5	1	28	43	52	1.0
PD02	576+0.702	0.6 W FAS 447	ROSEBUD	12	31	47	.571	20	26	RMS	207	26	291	0	8	5	0	29	42	52	.3
PD23	27+0.819	25.6 S FAI RTE 94	CUSTER	12	31	47	5.528	20	24	BST	399	57	492	0	8	7	3	28	46	52	3.0
PD02	577+0.299	JCT FAS 447	ROSEBUD	12	31	47	.926	20	26	RMS	283	36	218	0	11	5	1	28	45	53	.5
PD23	85+0.568	2.4 S JCT FAP 54	POWDER RIVER	12	53	53	10.019	24	28	RMS	550	79	266	0	12	10	3	26	51	54	4.9
PD23	55+0.758	COALWOOD	POWDER RIVER	12	49	55	8.797	24	24	RMS	339	49	217	0	11	9	1	27	48	55	4.6
PD18	23+0.937	3.9 N ROSEBUD CO	ROSEBUD	12	31	35	10.946	20	24	BST	218	28	448	0	8	7	1	29	45	55	6.0
PD27	22+0.502	JCT FAS RTE 494	FALLON	12	48	48	6.612	25	25	BST	389	50	266	0	12	9	2	27	50	56	3.3
PD23	47+0.867	2.7 N POWDER R CO	CUSTER	12	52	52	2.704	22	28	PMS	359	52	196	0	11	10	3	26	50	57	1.4
PD27	12+0.063	FALLON CO	FALLON	12	50	50	10.442	22	24	RMS	342	44	243	0	11	10	2	27	50	57	5.2
PD02	571+0.088	JCT I 94 E FORSYTH	ROSEBUD	12	28	52	.521	20	20	RMS	120	15	384	0	11	3	0	29	43	57	.3
PD02	614+0.727	MILES CITY	CUSTER	12	50	50	1.527	20	24	RMS	1577	205	487	3	17	10	8	24	62	58	.6
PD27	7+0.242	6.9 N EKALAKA	CARTER	12	50	50	4.818	22	24	RMS	304	39	243	0	11	10	1	28	50	58	2.4
PD23	2+0.111	MILES CITY LIMITS	CUSTER	12	20	36	.061	25	25	RMS	1304	169	303	0	11	8	20	22	61	58	
PD18	20+0.059	ROSEBUD CO	ROSEBUD	12	28	35	3.899	20	24	BST	255	33	627	0	9	8	3	29	49	58	2.0
PD37	53+0.681	11.3 E LAME DEER	ROSEBUD	12	54	54	8.693	24	24	RMS	894	120	258	5	18	9	3	23	58	58	3.7
PD37	62+0.327	ASHLAND	ROSEBUD	12	57	57	1.967	28	28	PMS	759	102	435	4	16	10	2	26	58	59	.8
PD18	34+0.903	JCT FAS RTE 462	ROSEBUD	12	31	56	3.183	20	24	BST	179	23	422	0	10	7	1	29	47	59	1.7
RD23	72+0.957	3.4 N FAP 37	ROWDER RIVER	12	28	41	3.380	24	24	BST	512	74	258	2	17	8	2	26	55	59	1.5
PD02	580+0.697	0.3 E JCT FAI 94	ROSEBUD	12	31	47	7.024	20	26	RMS	128	16	379	0	10	4	2	29	45	59	3.9
PD02	574+0.812	4.2 W ROSEBUD	ROSEBUD	12	31	40	1.397	22	26	RMS	127	16	761	0	10	5	1	30	46	60	.8
PD14	212+0.433	5.3 E ROSEBUD CO	ROSEBUD	12	46	57	4.717	20	24	RMS	236	37	203	0	12	10	1	27	50	60	2.4
PD14	207+0.150	ROSEBUD CO	ROSEBUD	12	46	57	5.287	20	24	RMS	261	41	333	0	12	10	2	28	52	61	2.5
PD17	19+0.177	0.6 E DIAMOND INT	CUSTER	12	29	41	3.286	24	26	BST	168	21	889	0	10	5	4	30	49	61	1.7
PD27	0+0.355	EKALAKA	CARTER	12	50	50	6.902	22	24	PMS	337	43	431	0	11	10	4	29	54	61	3.2
PD23	64+0.575	8.8 S COALWOOD	POWDER RIVER	12	29	41	8.397	24	24	BST	373	54	258	0	15	10	3	27	55	61	3.8
PD37	42+0.082	LAME DEER	ROSEBUD	12	75	75	4.469	24	24	PMS	1144	154	237	0	14	9	20	20	63	61	1.7
PD54	0+0.000	WYOMING LINE	POWDER RIVER	12	59	66	9.121	24	24	BST	294	38	258	0	13	10	2	28	53	61	4.3
PD18	1+0.000	MILES CITY LIMITS	CUSTER	12	57	57	1.171	32	32	BST	2030	263	504	6	21	10	8	22	67	62	.4
PDC2	560+0.881	JCT FAS 315	ROSEBUD	12	41	41	4.285	24	31	RMS	536	69	434	0	13	7	11	28	59	62	1.8
PD02	565+0.190	1.6 W FORSYTH	ROSEBUD	12	50	56	.768	24	32	PMS	705	91	696	5	16	8	5	28	62	63	.3
RD27	35+0.755	BAKER	FALLON	12	57	60	8.648	28	28	RMS	581	75	492	0	10	10	12	28	60	63	3.5
PD14	224+0.418	5.1 W INGOMAR	ROSEBUD	12	48	63	5.122	25	25	RMS	255	40	258	0	13	10	3	28	54	63	2.4
PD14	229+0.532	INGOMAR	ROSEBUD	12	55	63	12.892	20	20	RMS	224	35	290	0	13	9	4	28	54	64	5.9
PD23	95+0.564	6.0 N CARTER CO	POWDER RIVER	12	54	54	6.028	24	28	RMS	550	79	462	0	11	10	13	27	61	64	2.4
PD02	551+0.286	ROSEBUD CO.	ROSEBUD	12	36	42	5.503	26	30	RMS	166	21	672	0	11	7	4	30	52	64	2.6
RD37	64+0.304	ROWDER RIVER CO	POWDER RIVER	12	57	57	5.314	24	28	PMS	639	86	289	0	15	10	11	26	62	64	2.0
PDC2	571+0.969	7.0 W ROSEBUD	ROSEBUD	12	28	52	2.843	20	20	RMS	123	15	593	0	10	3	8	30	51	65	1.4
PD23	50+0.581	POWDER RIVER CO	POWDER RIVER	12	52	60	5.178	24	28	RMS	346	50	378	0	11	10	9	28	58	65	2.2
PD27	44+0.455	8.6 N BAKER	FALLON	12	58	58	10.261	30	30	BST	355	46	333	0	12	10	9	28	59	65	4.2
PD37	38+0.689	ROSEBUD CO	ROSEBUD	12	75	75	.873	40	40	PMS	1207	162	150	10	30	10	4	14	68	66	.3
PD18	18+0.057	2.0 S ROSEBUD CO	CUSTER	12	28	35	2.023	20	24	BST	263	34	655	0	8	8	13	29	58	67	.8
PD02	609+0.538	I94 W MILES CITY	CUSTER	12	62	62	.908	32	32	PMS	1099	124	567	7	18	10	6	27	68	67	.3
PD02	694+0.000	BAKER	FALLON	12	68	68	5.058	40	40	PMS	801	104	526	5	20	10	5	27	67	68	1.7

FINANCIAL DISTRICT NUMBER 12

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	POV	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FND	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ14	252+0.337	VANADA	ROSEBUD	12	54	54	7.161	24	24	RMS	212	33	258	3	16	10	2	28	59	69	2.9
PJ14	259+0.489	7.2 E VANADA	ROSEBUD	12	54	54	5.580	24	24	RMS	215	34	450	2	14	10	5	29	60	70	2.2
PJ02	556+0.882	4.0 W FAS 315	ROSEBUD	12	41	41	4.019	24	31	RMS	225	29	705	0	14	8	10	29	61	70	1.6
PJ02	588+0.068	3.7 W HATHAWAY	ROSEBUD	12	31	73	3.767	24	24	BST	128	16	575	0	14	4	8	30	56	70	1.7
PJ17	0+0.000	MILES CITY LIMITS	CUSTER	12	48	48	6.191	28	30	RMS	653	84	631	2	17	10	12	28	69	71	1.9
PJ23	14+0.654	12.4 S FAI RTE 94	CUSTER	12	62	62	10.568	30	30	PMS	429	62	510	4	14	10	11	28	67	72	3.5
PJ02	616+0.197	I 94 E MILES CITY	CUSTER	12	62	62	.689	32	32	PMS	713	92	270	7	23	10	7	25	72	73	.2
PJ23	108+0.475	HAMMOND	CARTER	12	55	73	11.000	28	28	PMS	568	82	486	0	15	10	20	27	72	74	3.1
PJ17	6+0.191	5.8 E MILES CITY	CUSTER	12	54	54	2.171	24	32	PMS	212	27	680	0	14	10	11	29	64	74	.8
PJ23	101+0.585	CARTER CO	CARTER	12	54	54	6.878	24	28	RMS	554	80	462	2	13	10	20	27	72	75	1.9
PJ18	2+0.159	JCT FAS RTE 489	CUSTER	12	64	64	10.901	30	30	PMS	417	54	600	5	18	10	9	29	71	75	3.2
PJ02	699+0.045	5.1 E BAKER	FALLON	12	68	68	6.441	40	40	PMS	552	71	552	5	20	10	9	28	72	75	1.8
PJ37	79+0.284	15.0 E POWDER R CO	POWDER RIVER	12	67	67	3.193	28	28	PMS	471	63	252	5	17	10	13	26	71	75	.9
PJ37	82+0.471	CUSTER FOR BORY	POWDER RIVER	12	67	67	2.271	28	28	PMS	476	64	289	4	15	10	15	27	71	75	.7
PJ37	69+0.625	6.3 E POWDER R CO	POWDER RIVER	12	67	67	9.659	28	28	PMS	485	65	435	6	19	10	10	28	73	76	2.6
PJ18	13+0.047	7.0 S ROSEBUD CO	CUSTER	12	63	63	5.000	30	30	PMS	275	35	663	4	15	10	11	29	69	76	1.6
PJ23	25+0.192	23.0 S FAI RTE 94	CUSTER	12	62	62	2.619	30	30	PMS	410	59	485	6	16	10	13	28	73	77	.7
PJ02	644+0.095	2.6 E LOCATE	CUSTER	12	65	65	11.760	40	40	PMS	423	54	500	6	18	10	12	28	74	78	3.1
PJ23	119+0.471	20.4 N WYO LINE	CARTER	12	55	55	10.845	28	28	BST	642	93	510	4	17	10	20	27	78	79	2.4
PJ14	217+0.153	10.0 E ROSEBUD CO	ROSEBUD	12	48	63	7.269	25	25	RMS	226	35	408	0	12	10	20	29	71	79	2.1
PJ23	130+0.301	9.6 N WYO LINE	CARTER	12	65	65	9.551	40	40	PMS	668	100	260	3	22	10	20	24	79	80	2.0
PJ37	39+0.577	0.8 E ROSEBUD CO	ROSEBUD	12	75	75	1.113	48	48	PMS	1252	169	272	10	30	10	11	21	82	80	.2
PJ37	95+0.715	EPSIE	POWDER RIVER	12	58	69	7.908	28	28	PMS	512	69	368	9	28	10	5	27	79	81	1.7
PJ37	84+0.754	2.1 E FOR BORY	POWDER RIVER	12	58	69	10.980	28	28	PMS	492	66	480	7	23	10	13	28	81	83	2.1
PJ14	242+0.413	AHLES	ROSEBUD	12	50	63	9.949	20	24	RMS	222	35	354	3	17	9	18	29	76	83	2.4
PJ17	8+0.358	8.0 E MILES CITY	CUSTER	12	62	62	.659	32	32	PMS	175	22	365	10	25	10	1	29	75	84	.2
PJ02	576+0.230	2.8 W ROSEBUD	RCSEBUD	12	71	71	.472	28	28	PMS	129	16	277	9	28	7	0	29	73	84	.1
PJ17	18+0.648	DIAMOND RING INTCH	CUSTER	12	71	71	.579	26	26	PMS	168	21	671	9	28	10	0	30	77	85	.1
PJ14	265+0.115	12.6 E VANADA	ROSEBUD	12	57	75	5.387	32	32	PMS	348	55	546	10	30	10	3	28	81	85	1.0
PJ37	41+0.208	0.8 W LAME DEER	RCSEBUD	12	75	75	.872	48	48	PMS	1314	177	272	10	30	10	17	20	87	85	.1
PJ02	655+0.880	5.9 W FALLON CO	CUSTER	12	67	67	5.873	40	40	PMS	415	53	165	7	21	10	20	25	83	86	1.0
PJ02	580+0.354	JCT FAI 94	RCSEBUD	12	71	71	.343	24	28	PMS	128	16	277	9	28	10	0	29	76	86	.1
PJ02	661+0.731	FALLON CO	FALLON	12	67	67	6.054	40	40	PMS	430	55	180	7	21	10	20	25	83	86	1.0
PJ02	623+0.171	7.0 E JCT FAI 94	CUSTER	12	70	70	7.734	34	34	PMS	543	70	400	9	27	10	13	27	86	87	1.1
PJ23	76+0.303	JCT FAP RTE 37	POWDER RIVER	12	69	69	1.530	28	28	PMS	1189	172	276	9	28	10	20	21	88	87	.2
PJ54	9+0.128	BIOOLE	POWDER RIVER	12	68	68	8.767	30	32	PMS	284	36	420	8	26	10	10	29	83	87	1.5
PJ02	587+0.721	4.0 W HATHAWAY	ROSEBUD	12	71	71	.347	28	28	PMS	128	16	356	10	30	10	0	29	79	88	.1
PJ02	667+0.771	JCT. FAS RTE. 320	FALLON	12	58	72	12.363	32	32	PMS	500	65	520	8	27	10	15	28	88	89	1.5
PJ02	630+0.911	10.6 W LOCATE	CUSTER	12	75	75	6.533	34	34	PMS	471	61	380	10	30	10	11	28	89	90	.7
PJ37	40+0.709	1.3 W LAME DEER	RCSEBUD	12	75	75	.522	56	56	PMS	1289	174	1368	10	30	10	20	28	98	97	
PJ02	637+0.464	4.1 W LOCATE	CUSTER	12	73	73	6.280	34	34	PMS	457	59	400	10	30	10	20	28	98	98	.1
PJ54	17+0.695	8.8 N BIOOLE	POWDER RIVER	12	74	75	5.910	30	30	PMS	328	42	426	10	30	10	20	29	99	99	.1
PJ54	23+0.736	5.6 S FA RTE 23	POWDER RIVER	12			5.516	UNDER CONSTRUCTION													
PJ02	579+0.967	0.4 W JCT FAI 94	ROSEBUD	12	71	71	.387	28	28	PMS	140	18	990	10	30	10	20	30	100	100	
PJC2	571+0.609	WEIGH ST FORSYTH E	RCSEBUD	12	71	71	.360	28	28	PMS	120	15	720	10	30	10	20	30	100	100	
		DISTRICT TOTAL					522.503													36	189.9
		SYSTEM TOTAL					4861.700													391	893.9

Urban Deficiency Ratings by Federal Aid Route And City

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					ND. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+ •					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
1	13 947	1	TROY	1.33	2	24	30	3	6	2630	24	44	3	12	0	0	0	133	200	32	36.5	0.48
1	31 889	1	LIBBY	0.29	4	68	68	3	12	5912	68	68	3	12	0	0	0	0	0	0	0.0	0.00
1	32 180	1	LIBBY	0.13	4	50	50	3	12	9800	50	68	3	12	0	0	0	0	0	26	2.6	0.00
1	32 313	1	LIBBY	0.43	4	50	50	3	12	9710	50	68	3	12	0	0	0	0	0	26	2.6	0.01
1	119 622	1	KALISPELL	0.57	4	48	48	3	12	2750	48	68	3	12	0	0	0	0	0	29	2.9	0.01
1	120 185	1	KALISPELL	0.21	4	80	80	3	12	5750	80	80	3	12	0	0	0	0	0	0	0.0	0.00
1	120 397	1	KALISPELL	0.51	4	45	61	3	12	12840	48	68	3	12	0	0	0	19	0	10	2.9	0.01
1	120 903	1	KALISPELL	0.64	4	45	61	3	12	15000	48	68	3	12	0	0	0	19	0	10	2.9	0.01
1	121 631	1	KALISPELL	0.18	4	52	52	3	12	17260	52	68	3	12	0	0	0	0	0	24	2.4	0.00
1	121 813	1	KALISPELL	0.70	4	66	66	3	12	14680	66	68	3	12	0	0	0	0	0	3	0.3	0.00
1	122 354	1	KALISPELL	0.56	4	64	64	3	12	14500	64	68	3	12	0	0	0	0	0	6	0.6	0.00
1	122 916	1	KALISPELL	1.30	2	44	44	3	12	6650	48	68	3	12	0	0	0	25	0	35	6.0	0.07
1	221 881	2	BROWNING	0.48	4	64	64	3	12	6240	64	68	3	12	0	0	0	0	0	6	0.6	0.00
1	221 1362	2	BROWNING	0.30	4	68	68	3	12	5780	68	68	3	12	0	0	0	0	0	0	0.0	0.00
1	254 524	2	CUT BANK	0.05	3	42	42	3	10	2420	42	56	3	12	0	100	93	50	50	25	31.8	0.01
1	254 807	2	CUT BANK	0.28	2	60	60	3	10	4082	60	60	3	12	0	0	0	50	50	0	10.0	0.02
1	255 134	2	CUT BANK	0.61	2	50	50	3	10	6115	50	68	3	12	0	0	0	50	50	26	12.6	0.07
1	255 741	2	CUT BANK	0.29	2	48	48	3	12	3980	48	48	3	12	0	0	0	0	0	0	0.0	0.00
1	279 228	2	SHELBY	0.21	2	57	60	3	12	4560	57	68	3	12	0	0	0	50	0	12	6.2	0.01

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+ •					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
1	279	437	2	SHELBY	0.27	2	52	52	3	12	5950	52	68	3	12	0	0	0	50	0	24	7.4	0.02
1	279	709	2	SHELBY	0.07	2	24	44	3	12	6400	48	68	3	12	0	0	0	175	0	35	21.0	0.01
1	279	778	2	SHELBY	0.18	2	24	31	3	12	4100	24	44	3	12	0	0	0	50	0	30	8.0	0.01
1	279	958	2	SHELBY	0.15	2	32	32	3	12	1840	32	44	3	12	0	0	0	0	0	27	2.7	0.00
1	321	758	2	CHESTER	0.65	2	46	46	3	12	2370	46	46	3	12	0	0	0	0	0	0	0.0	0.00
1	347	718	2	HINGHAM	0.50	2	32	32	3	12	1150	32	44	3	12	0	0	0	0	0	27	2.7	0.01
1	380	679	2	HAVRE	0.83	3	40	40	2	12	4586	40	56	3	12	0	0	0	167	100	29	29.6	0.24
1	381	507	2	HAVRE	0.62	2	40	40	2	12	4586	48	68	3	12	0	0	0	189	100	41	33.0	0.20
1	382	125	2	HAVRE	0.35	2	56	56	3	6	12362	56	68	3	12	0	0	0	100	200	18	31.8	0.11
1	382	477	2	HAVRE	0.15	2	48	56	2	10	13465	48	68	3	12	0	0	0	167	133	18	31.8	0.04
1	382	630	2	HAVRE	0.44	2	48	48	2	8	10025	48	68	3	12	0	0	0	100	100	29	22.9	0.10
1	383	54	2	HAVRE	0.74	2	24	30	3	12	8800	48	68	3	12	0	0	0	175	0	56	23.1	0.17
1	403	595	2	CHINOOK	0.50	2	48	48	3	12	2225	48	48	3	12	0	0	0	0	0	0	0.0	0.00
1	424	649	2	HARLEM	0.06	2	40	40	3	12	2041	40	44	3	12	0	0	0	0	0	9	0.9	0.00
1	453	653	3	DODSON	0.37	2	40	40	3	12	1050	48	48	3	12	0	0	0	50	0	17	6.7	0.02
1	454	144	3	DODSON	0.41	2	24	30	2	6	1050	24	44	3	12	0	0	0	167	200	32	39.9	0.16
1	471	689	3	MALTA	0.08	2	24	42	2	12	2115	24	44	3	12	0	0	0	167	100	5	27.2	0.02
1	471	769	3	MALTA	0.11	2	30	30	2	8	3240	30	44	3	12	0	0	0	167	167	32	36.6	0.04
1	471	884	3	MALTA	0.48	2	41	41	3	12	2008	41	44	3	12	0	0	0	0	0	7	0.7	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	•	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
1	499	130	3	SACO	0.18	2	24	32	3	8	1114	24	44	3	12	0	0	0	133	167	27	32.7	0.05
1	499	313	3	SACO	0.74	2	24	28	2	12	1132	24	44	3	12	0	0	0	167	100	36	30.3	0.22
1	540	985	3	GLASGOW	0.11	2	24	26	3	12	5148	24	44	3	12	0	0	0	50	0	41	9.1	0.01
1	541	427	3	GLASGOW	0.21	2	24	32	3	12	6530	48	68	3	12	0	0	0	217	100	53	37.0	0.07
1	541	639	3	GLASGOW	0.08	4	48	68	3	12	9160	48	68	3	12	0	0	0	0	0	0	0.0	0.00
1	541	718	3	GLASGOW	0.80	4	48	68	3	12	9530	48	68	3	12	0	0	0	0	0	0	0.0	0.00
1	555	152	3	NASHUA	0.75	2	32	32	3	12	1228	32	44	3	12	0	0	0	0	0	27	2.7	0.02
1	555	994	3	NASHUA	0.14	2	32	32	3	12	1329	32	44	3	12	0	0	0	0	0	27	2.7	0.00
1	590	383	3	WLF POINT	0.22	4	68	84	3	12	2202	68	84	3	12	0	0	0	0	0	0	0.0	0.00
1	590	602	3	WLF POINT	0.36	4	68	84	3	12	6827	68	84	3	12	0	0	0	0	0	0	0.0	0.00
1	590	960	3	WLF POINT	0.45	4	48	68	3	12	3500	48	68	3	12	0	0	0	0	0	0	0.0	0.00
1	611	551	3	POPLAR	0.08	2	34	60	3	12	1818	34	60	3	12	0	0	0	0	0	0	0.0	0.00
1	611	636	3	POPLAR	0.29	2	62	62	3	12	5258	62	62	3	12	0	0	0	0	0	0	0.0	0.00
1	625	605	3	BROCKTON	0.53	2	42	42	3	7	1210	42	44	3	12	0	0	0	0	125	5	13.0	0.06
1	644	245	3	CLBERTSON	0.30	2	32	44	3	12	1103	32	44	3	12	0	0	0	0	0	0	0.0	0.00
1	644	550	3	CLBERTSON	0.46	2	32	44	3	12	2560	32	44	3	12	0	0	0	0	0	0	0.0	0.00
1	679	184	2	SHELBY	0.46	2	24	30	3	7	3420	24	44	3	12	0	0	0	133	183	32	34.8	0.16
1	679	650	2	SHELBY	0.25	2	22	30	3	5	2740	24	44	3	12	0	0	0	147	217	32	39.6	0.09
				TOTAL FAP 1	22.44																	11.3	2.53

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST .	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
2	75	168	8	ALBERTON	0.13	2	28	28	3	12	589	28	44	3	12	0	0	0	100	100	36	23.6	0.03
2	75	301	8	ALBERTON	0.84	2	32	46	1	6	670	32	48	3	12	0	0	0	253	200	4	45.7	0.38
2	76	204	8	ALBERTON	0.35	2	20	20	1	3	150	24	48	3	12	0	0	0	261	250	58	56.9	0.19
2	154	492	8	ORUMMONO	0.06	2	32	32	3	12	148	32	48	3	12	0	0	0	100	100	33	23.3	0.01
2	154	548	8	ORUMMONO	0.04	2	32	32	3	12	793	32	44	3	12	0	0	0	0	0	27	2.7	0.00
2	154	586	8	ORUMMONO	0.23	2	28	28	3	12	820	28	44	3	12	0	0	0	0	0	36	3.6	0.00
2	154	820	8	ORUMMONO	0.71	2	24	46	3	5	1237	24	46	3	12	0	0	0	100	217	0	31.7	0.22
2	155	528	8	ORUMMONO	0.05	2	32	32	3	12	690	32	44	3	12	0	0	0	0	0	27	2.7	0.00
2	187	1834	8	OEER LOGE	0.25	2	32	32	3	12	1967	32	44	3	12	0	0	0	0	0	27	2.7	0.00
2	188	220	8	OEER LOGE	0.49	4	75	75	2	6	6150	75	75	3	12	0	0	0	150	150	0	30.0	0.14
2	188	707	8	OEER LOGE	0.26	4	70	70	2	7	4995	70	70	3	12	0	0	0	100	125	0	22.5	0.05
2	188	963	8	OEER LOGE	0.07	2	24	32	2	6	1874	24	44	3	12	0	0	0	100	150	27	27.7	0.01
2	301	360	10	MANHATTAN	0.39	2	40	40	3	6	415	40	44	3	12	0	0	0	100	200	9	30.9	0.12
2	301	751	10	MANHATTAN	0.23	2	40	60	3	6	1949	40	60	3	12	0	0	0	100	200	0	30.0	0.06
2	301	982	10	MANHATTAN	0.22	2	40	40	2	9	462	40	44	3	12	0	0	0	200	150	9	35.9	0.07
2	310	744	10	BELGRADE	0.38	2	24	28	3	5	1896	24	44	3	12	0	0	0	100	217	36	35.3	0.13
2	311	119	10	BELGRADE	0.15	2	40	40	3	5	3360	40	44	3	12	0	0	0	100	217	9	32.6	0.05
2	311	273	10	BELGRADE	0.38	2	26	40	3	5	2146	26	44	3	12	0	0	0	100	217	9	32.6	0.12
2	322	370	10	BOZEMAN	0.29	4	76	76	3	12	730	76	76	3	12	0	0	0	0	0	0	0.0	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST •	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
							SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
2	323	123	10	BOZEMAN	1.21	2	24	32	3	12	390	24	44	3	12	0	0	0	100	100	27	22.7	0.27
2	420	913	11	COLUMBUS	0.22	2	44	62	2	10	1825	44	62	3	12	0	0	0	167	133	0	30.0	0.06
2	421	183	11	COLUMBUS	0.21	2	42	52	2	8	2684	42	52	3	12	0	0	0	167	167	0	33.4	0.07
2	421	398	11	COLUMBUS	0.22	2	28	40	3	8	347	28	44	3	12	0	0	0	100	167	9	27.6	0.06
2	610	813	12	MILES CTY	0.63	2	24	30	3	11	1099	24	44	3	12	0	0	0	50	25	32	10.7	0.06
2	611	448	12	MILES CTY	0.69	2	22	28	3	11	2746	24	44	3	12	0	0	0	147	117	36	30.0	0.20
2	612	135	12	MILES CTY	0.33	2	20	24	3	11	3958	24	44	3	12	0	0	0	161	117	45	32.3	0.10
2	612	467	12	MILES CTY	0.19	2	54	54	3	5	5560	54	68	3	12	0	0	0	100	217	21	33.8	0.06
2	612	662	12	MILES CTY	0.44	2	54	54	3	6	9600	54	68	3	12	0	0	0	133	200	21	35.4	0.15
2	613	99	12	MILES CTY	0.55	2	22	36	3	8	5500	48	68	3	12	0	0	0	224	167	47	43.8	0.24
2	613	650	12	MILES CTY	1.08	2	24	32	2	12	6443	24	44	3	12	0	0	0	167	100	27	29.4	0.31
2	680	140	12	PLEVNA	0.35	2	24	30	1	6	454	24	44	3	12	0	0	0	267	200	32	49.9	0.17
2	680	494	12	PLEVNA	0.40	2	22	30	1	6	700	24	44	3	12	0	0	0	269	200	32	50.1	0.20
2	692	616	12	BAKER	0.44	2	43	43	3	12	928	43	44	3	12	0	0	0	0	0	2	0.2	0.00
2	693	54	12	BAKER	0.71	2	43	43	3	12	2809	43	44	3	12	0	0	0	0	0	2	0.2	0.00
2	693	763	12	BAKER	0.22	2	44	44	3	12	1003	44	44	3	12	0	0	0	100	100	0	20.0	0.04
2	706	730	8	SUPERIOR	0.27	2	22	24	2	5	209	24	44	3	12	0	0	0	254	258	45	55.7	0.15
2	707	64	8	SUPERIOR	0.83	2	22	24	3	5	260	24	44	3	12	0	0	0	224	258	45	52.7	0.43
2	708	0	8	MISSOULA	0.94	2	42	42	3	12	3220	42	44	3	12	0	0	0	0	0	5	0.5	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST .	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
2	709	205	8	MISSOULA	0.07	2	30	30	3	12	2220	30	44	3	12	0	0	0	0	0	32	3.2	0.00
2	709	271	8	MISSOULA	1.19	4	72	88	3	12	11220	72	88	3	12	0	0	0	0	0	0	0.0	0.00
2	710	449	8	MISSOULA	0.76	4	68	72	3	12	14944	68	72	3	12	0	0	0	0	0	0	0.0	0.00
2	711	209	8	MISSOULA	0.86	4	62	62	3	8	13521	62	68	3	12	0	0	0	50	100	9	15.9	0.13
2	712	68	8	MISSOULA	0.59	4	62	62	3	8	10038	62	68	3	12	0	0	0	50	100	9	15.9	0.09
2	712	658	8	MISSOULA	0.21	4	72	72	3	12	13980	72	72	3	12	0	0	0	0	0	0	0.0	0.00
2	712	873	8	MISSOULA	0.14	4	48	68	3	12	12060	48	68	3	12	0	0	0	0	0	0	0.0	0.00
2	713	15	11	COLUMBUS	0.29	2	44	44	3	12	1656	44	44	3	12	0	0	0	0	0	0	0.0	0.00
				TOTAL FAP 2	19.56																	22.3	4.37
3	15	170	9	LIMA	0.10	2	18	20	2	12	489	24	48	3	12	0	0	0	180	100	58	33.8	0.03
3	15	273	9	LIMA	0.93	2	22	24	3	5	489	24	48	3	12	0	0	0	117	217	50	38.4	0.35
3	127	240	9	BUTTE	0.33	4	66	72	3	12	3488	66	72	3	12	0	0	0	0	0	0	0.0	0.00
3	128	0	9	BUTTE	0.60	4	70	70	3	12	13350	70	70	3	12	0	0	0	50	0	0	5.0	0.02
3	129	258	9	BUTTE	0.34	4	60	60	3	5	11460	60	68	3	12	0	0	0	100	217	12	32.9	0.11
3	129	596	9	BUTTE	0.41	4	60	60	3	5	6799	60	68	3	12	0	0	0	100	217	12	32.9	0.13
3	130	10	9	BUTTE	0.56	2	48	48	3	6	9570	48	68	3	12	0	0	0	0	150	29	17.9	0.09
3	130	567	9	BUTTE	0.59	2	24	24	2	9	7410	48	68	3	12	0	0	0	250	150	65	46.5	0.27
3	130	1156	9	BUTTE	0.49	2	24	24	2	9	6535	48	68	3	12	0	0	0	250	150	65	46.5	0.22
3	130	1642	9	BUTTE	0.54	2	24	30	2	6	2931	24	44	3	12	0	0	0	100	150	32	28.2	0.15

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST •	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						ND. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
3	131	442	9	BUTTE	2.43	2	24	42	2	6	1650	24	44	3	12	0	0	0	100	150	5	25.5	0.62
3	259	147	6	CASCADE	0.47	2	20	24	3	3	493	24	44	3	12	0	0	0	133	250	45	42.8	0.20
3	259	619	6	CASCADE	0.19	2	34	34	3	3	650	34	44	3	12	0	0	0	100	250	23	37.3	0.06
3	259	805	6	CASCADE	0.10	2	50	50	3	3	1370	50	50	3	12	0	0	0	100	250	0	35.0	0.03
3	259	905	6	CASCADE	0.20	2	34	34	3	3	1101	34	44	3	12	0	0	0	100	250	23	37.3	0.07
3	260	105	6	CASCADE	0.14	2	22	24	3	12	833	24	44	3	12	0	0	0	117	100	45	26.2	0.03
3	322	172	6	FAIRFIELD	0.11	2	20	22	3	6	1697	24	44	3	12	0	0	0	133	200	50	38.3	0.04
3	322	328	6	FAIRFIELD	0.19	2	22	40	3	6	1920	24	44	3	12	0	0	0	117	200	9	32.6	0.06
3	322	475	6	FAIRFIELD	0.23	2	72	72	3	6	3460	72	72	3	12	0	0	0	100	200	0	30.0	0.06
3	322	627	6	FAIRFIELD	0.15	2	22	32	3	6	1595	24	44	3	12	0	0	0	117	200	27	34.4	0.05
3	322	809	6	FAIRFIELD	0.18	2	20	22	3	6	830	24	44	3	12	0	0	0	133	200	50	38.3	0.06
3	339	483	6	CHOTEAU	0.61	2	24	36	3	9	1643	24	44	3	12	0	0	0	133	150	18	30.1	0.18
3	340	94	6	CHOTEAU	0.12	2	48	48	3	9	3870	48	48	3	12	0	0	0	133	150	0	28.3	0.03
3	340	214	6	CHOTEAU	0.46	2	70	70	3	3	2180	70	70	3	12	0	0	0	100	250	0	35.0	0.16
3	340	676	6	CHOTEAU	0.28	2	24	30	3	4	1740	24	44	3	12	0	0	0	100	233	32	36.5	0.10
3	463	366	9	DILLON	0.10	2	48	48	1	3	125	48	48	3	12	0	0	0	233	250	0	48.3	0.04
				TOTAL FAP 3	10.85																	29.1	3.16
4	25	676	11	BRIDGER	0.07	2	40	40	3	12	2165	40	44	3	12	0	0	0	0	0	9	0.9	0.00
4	25	748	11	BRIDGER	0.47	4	80	80	3	12	2270	80	80	3	12	0	0	0	0	0	0	0.0	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+ .					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
4	26	214	11 BRIDGER	0.07	2	24	30	3	4	1830	24	44	3	12	0	0	0	100	233	32	36.5	0.02
4	32	773	11 FROMBERG	0.20	2	24	32	2	12	1807	24	44	3	12	0	0	0	100	0	27	12.7	0.02
4	32	973	11 FROMBERG	0.23	2	24	44	2	12	1807	24	44	3	12	0	0	0	100	0	0	10.0	0.02
4	54	531	11 LAUREL	0.16	2	24	34	2	5	4194	24	44	3	12	0	0	0	200	217	23	44.0	0.06
4	54	689	11 LAUREL	0.09	2	28	28	3	5	4194	28	44	3	12	0	0	0	100	217	36	35.3	0.03
4	54	784	11 LAUREL	0.52	2	60	83	3	4	5138	60	83	3	12	0	0	0	100	233	0	33.3	0.17
			TOTAL FAP 4	1.81																	17.7	0.32
5	32	613	1 ST IGNATS	0.15	2	32	32	3	12	2480	32	44	3	12	0	0	0	0	0	27	2.7	0.00
5	46	572	1 RONAN	0.77	2	44	44	3	12	4184	44	44	3	12	0	0	39	0	0	0	3.9	0.02
5	59	335	1 POLSON	0.98	2	40	40	3	12	6731	48	68	3	12	0	0	0	50	0	41	9.1	0.08
5	60	330	1 POLSON	0.39	2	40	40	3	12	4959	48	68	3	12	0	0	0	50	0	41	9.1	0.03
5	60	719	1 POLSON	0.29	2	40	40	3	12	2712	40	44	3	12	0	0	0	0	0	9	0.9	0.00
5	109	612	1 KALISPELL	1.37	2	38	38	2	12	6598	48	68	3	12	0	0	0	142	0	44	18.6	0.25
5	110	965	1 KALISPELL	0.61	2	38	38	2	12	7466	48	68	3	12	0	0	0	142	0	44	18.6	0.11
5	111	584	1 KALISPELL	0.41	4	48	60	3	12	12426	48	68	3	12	0	0	0	0	0	12	1.2	0.00
5	112	14	1 KALISPELL	0.67	4	48	60	3	12	8373	48	68	3	12	0	0	0	100	100	12	21.2	0.14
5	112	687	1 KALISPELL	0.39	4	64	70	3	12	7536	64	70	3	12	0	0	0	100	100	0	20.0	0.07
5	113	46	1 KALISPELL	0.78	4	48	64	3	12	5836	48	68	3	12	0	0	0	0	0	6	0.6	0.00
5	114	124	1 KALISPELL	0.74	2	36	36	3	12	5140	36	44	3	12	0	0	0	0	0	18	1.8	0.01

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST •	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
5	126	948	1	WHITEFISH	0.47	2	24	36	3	12	6735	48	68	3	12	0	0	0	150	0	47	19.7	0.09
5	127	433	1	WHITEFISH	0.28	2	40	40	3	12	5602	48	68	3	12	0	0	0	50	0	41	9.1	0.02
5	127	710	1	WHITEFISH	0.20	2	46	46	3	5	5201	48	68	3	12	0	0	0	108	217	32	35.7	0.07
5	127	909	1	WHITEFISH	0.16	2	22	30	3	5	4006	24	44	3	12	0	0	0	117	217	32	36.6	0.05
5	128	78	1	WHITEFISH	0.41	2	22	23	3	6	3033	24	44	3	12	0	0	0	208	250	48	50.6	0.20
5	178	89	1	EUREKA	0.48	2	22	24	2	5	1606	24	44	3	12	0	0	0	178	217	45	44.0	0.20
5	178	566	1	EUREKA	0.56	2	24	30	3	5	1445	24	44	3	12	3	25	27	133	217	32	43.7	0.24
5	179	175	1	EUREKA	0.19	2	24	50	3	6	2111	24	50	3	12	0	0	134	100	200	0	43.4	0.08
5	179	361	1	EUREKA	0.33	2	24	30	3	5	2423	24	44	3	12	14	0	15	100	217	32	37.8	0.12
				TOTAL FAP 5	10.63																	16.7	1.78
6	50	498	8	THMPSN FL	0.40	2	24	32	2	12	3429	24	44	3	12	0	0	0	167	100	27	29.4	0.11
6	50	901	8	THMPSN FL	0.65	2	40	40	3	5	1733	40	44	3	12	0	0	0	133	217	9	35.9	0.23
6	75	707	8	PLAINS	0.45	2	40	40	3	5	2153	40	44	3	12	0	0	0	0	175	9	18.4	0.08
6	76	158	8	PLAINS	0.10	2	20	30	3	3	3572	24	44	3	12	0	0	0	133	250	32	41.5	0.04
				TOTAL FAP 6	1.60																	28.8	0.46
7	30	484	8	DARBY	0.12	2	22	26	2	6	2590	24	44	3	12	0	0	0	208	200	41	44.9	0.05
7	30	603	8	DARBY	0.28	2	22	42	3	4	3066	24	44	3	12	0	0	0	117	233	5	35.5	0.10
7	30	887	8	DARBY	0.40	2	22	36	3	4	2723	24	44	3	12	0	0	0	224	267	18	50.9	0.20
7	46	619	8	HAMILTON	0.70	2	24	36	3	12	6604	48	68	3	12	0	0	0	200	100	47	34.7	0.24

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
						SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
7	47.307	8	HAMILTON	0.02	2	60	60	3	6	7708	60	68	3	12	0	0	0	100	200	12	31.2	0.00
7	47.325	8	HAMILTON	0.66	2	24	36	3	10	7048	48	68	3	12	0	0	0	200	133	47	38.0	0.25
7	90.152	8	MISSOULA	0.10	4	48	68	3	12	8105	48	68	3	12	0	0	0	0	0	0	0.0	0.00
7	90.250	8	MISSOULA	0.38	4	88	88	3	12	8105	88	88	3	12	0	0	0	0	0	0	0.0	0.00
7	90.627	8	MISSOULA	0.79	4	88	88	3	12	12472	88	88	3	12	0	0	0	0	0	0	0.0	0.00
7	91.411	8	MISSOULA	0.50	4	40	54	3	2	13905	48	68	3	12	0	0	0	133	267	21	42.1	0.20
7	91.909	8	MISSOULA	0.66	4	40	54	3	2	14292	48	68	3	12	0	0	0	133	267	21	42.1	0.27
7	92.832	8	MISSOULA	0.40	4	48	56	3	2	17942	48	68	3	12	0	0	0	100	267	18	38.5	0.15
7	93.218	8	MISSOULA	0.65	2	40	40	1	4	18065	48	68	3	12	0	0	0	272	233	41	54.6	0.35
7	93.868	8	MISSOULA	0.08	4	48	55	2	6	18065	48	68	3	12	0	0	0	100	150	19	26.9	0.02
7	94.41	8	MISSOULA	0.55	4	48	68	3	12	13179	48	68	3	12	0	0	0	0	0	0	0.0	0.00
7	94.596	8	MISSOULA	0.34	4	48	68	3	12	17797	48	68	3	12	0	0	0	0	0	0	0.0	0.00
			TOTAL FAP 7	6.63																	27.6	1.83
8	39.654	7	HELENA	0.93	2	20	30	2	2	2116	24	44	3	12	0	0	0	189	267	32	48.8	0.45
8	40.550	7	HELENA	0.14	4	72	72	3	12	2116	72	72	3	12	0	0	0	0	0	0	0.0	0.00
8	40.690	7	HELENA	1.29	4	72	72	3	12	5781	72	72	3	12	0	0	0	0	0	0	0.0	0.00
8	41.429	7	HELENA	1.10	4	72	72	3	12	10921	72	72	3	12	0	0	0	0	0	0	0.0	0.00
8	43.57	7	HELENA	0.45	4	74	74	3	12	16493	74	74	3	12	0	0	0	0	0	0	0.0	0.00
8	43.503	7	HELENA	0.54	4	60	60	3	12	15137	60	68	3	12	0	0	0	50	0	12	6.2	0.03

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT OISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+ •					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROAOWAY	SURFACE	BASE								
8	44 29	7	HELENA	0.57	4	64	64	3	12	15268	64	68	3	12	0	0	0	50	0	6	5.6	0.03
8	44 597	7	HELENA	1.06	4	48	72	3	12	16928	48	72	3	12	0	0	0	0	0	0	0.0	0.00
8	45 491	7	HELENA	0.55	4	48	60	3	12	11379	48	68	3	12	0	0	0	0	0	12	1.2	0.00
8	46 10	7	HELENA	0.47	4	30	30	3	6	8466	48	68	3	12	0	0	0	196	200	56	45.2	0.21
8	48 571	7	E HELENA	0.31	2	24	30	3	6	6064	48	68	3	12	0	0	0	217	200	56	47.3	0.14
8	48 886	7	E HELENA	0.69	2	59	59	3	6	7497	59	68	3	12	0	0	0	133	200	13	34.6	0.23
8	49 579	7	E HELENA	0.28	2	24	30	3	5	2974	24	44	3	12	0	0	0	133	217	32	38.2	0.10
8	76 982	7	TOWNSEND	0.56	2	32	32	3	10	3071	32	44	3	12	0	0	0	0	50	27	7.7	0.04
8	77 530	7	TOWNSEND	0.55	2	24	32	3	11	2107	24	44	3	12	0	0	0	50	25	27	10.2	0.05
			TOTAL FAP 8	9.49																	13.5	1.28
9	64 41	6	CHOTEAU	0.43	2	22	24	2	4	1014	24	44	3	12	0	20	11	208	233	45	51.7	0.22
9	64 476	6	CHOTEAU	0.12	2	24	36	2	4	1014	24	44	3	12	0	0	0	200	233	18	45.1	0.05
9	64 596	6	CHOTEAU	0.16	2	34	34	2	4	1353	34	44	3	12	0	0	0	200	233	23	45.6	0.07
9	64 756	6	CHOTEAU	0.03	2	34	48	2	4	1088	34	48	3	12	0	0	0	200	233	0	43.3	0.01
			TOTAL FAP 9	0.74																	47.3	0.35
10	0 0	6	GT FALLS	0.91	4	70	70	3	8	12707	70	70	3	12	0	0	0	0	100	0	10.0	0.09
10	0 915	6	GT FALLS	0.86	4	70	70	3	12	13437	70	70	3	12	0	0	0	0	0	0	0.0	0.00
10	1 777	6	GT FALLS	1.09	4	62	62	3	12	15952	62	68	3	12	0	0	0	0	0	9	0.9	0.00
10	3 279	6	GT FALLS	0.25	4	48	64	3	12	2910	48	68	3	12	0	0	0	0	0	6	0.6	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
10	79+360	6	BIG SANDY	0.22	2	22	24	1	5	1789	24	44	3	12	0	0	0	269	217	45	53.1	0.11
10	79+580	6	BIG SANDY	0.42	2	24	26	2	9	1534	24	44	3	12	0	0	0	200	150	41	39.1	0.16
			TOTAL FAP 10	3.75																	9.6	0.36
11	51+812	10	LVNGSTN	1.10	2	32	32	3	12	3266	32	44	3	12	0	0	0	0	0	27	2.7	0.02
11	52+915	10	LVNGSTN	0.14	4	68	68	3	12	3266	68	68	3	12	0	0	0	0	0	0	0.0	0.00
11	53+68	10	LVNGSTN	0.17	4	68	68	3	12	5976	68	68	3	12	0	0	0	0	0	0	0.0	0.00
11	53+242	10	LVNGSTN	0.51	2	24	42	3	12	7080	48	68	3	12	0	0	0	150	0	38	18.8	0.09
11	53+757	10	LVNGSTN	0.41	2	44	44	3	12	7080	48	68	3	12	0	0	0	25	0	35	6.0	0.02
11	54+122	10	LVNGSTN	0.26	2	46	46	3	12	8498	48	68	3	12	0	0	0	108	100	32	24.0	0.06
11	54+380	10	LVNGSTN	0.11	2	36	46	3	5	8964	48	68	3	12	0	0	0	150	217	32	39.9	0.04
11	54+495	10	LVNGSTN	0.51	2	36	42	3	6	7328	48	68	3	12	0	0	0	150	200	38	38.8	0.19
11	55+9	10	LVNGSTN	0.36	2	24	40	3	6	5201	24	44	3	12	0	0	0	100	200	9	30.9	0.11
11	55+366	10	LVNGSTN	0.51	2	20	24	3	3	3075	48	68	3	12	0	0	0	217	250	65	53.2	0.27
11	74+905	10	CLYO PARK	0.17	2	20	30	2	5	600	24	44	3	12	0	0	0	217	217	32	46.6	0.07
11	75+24	10	CLYD PARK	0.27	2	20	40	2	5	600	24	44	3	12	0	0	18	217	217	9	46.1	0.12
11	75+296	10	CLYD PARK	0.04	2	20	24	3	6	600	24	44	3	12	0	0	0	161	200	45	40.6	0.01
11	125+678	10	W SUL SPG	0.49	2	40	40	3	12	920	40	40	3	12	0	0	0	0	0	0	0.0	0.00
11	126+207	10	W SUL SPG	0.50	2	55	55	3	12	2453	55	55	3	12	0	0	0	0	0	0	0.0	0.00
11	164+842	6	NEIHART	0.64	2	28	28	1	12	400	28	44	3	12	0	0	0	230	0	36	26.6	0.17

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST •	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
11	165	480	6	NEIHART	0.98	2	20	24	2	5	467	24	44	3	12	0	0	0	217	217	45	47.9	0.4
11	166	460	6	NEIHART	1.53	2	22	26	2	4	425	24	44	3	12	0	24	13	117	200	41	39.5	0.6
11	220	366	6	GT FALLS	0.08	2	48	62	3	12	4384	48	68	3	12	0	0	66	50	0	9	12.5	0.0
11	220	442	6	GT FALLS	1.15	4	48	62	3	12	7908	48	68	3	12	0	0	0	0	0	9	0.9	0.0
11	221	597	6	GT FALLS	1.37	4	48	62	3	12	24435	48	68	3	12	0	0	0	0	0	9	0.9	0.0
11	222	966	6	GT FALLS	0.50	4	61	76	3	12	25382	61	76	3	12	0	0	0	50	0	0	5.0	0.0
11	223	464	6	GT FALLS	0.82	4	64	80	3	12	27446	64	80	3	12	0	2	0	50	0	0	5.2	0.0
11	224	280	6	GT FALLS	0.18	4	48	70	2	12	25054	48	70	3	12	75	189	113	100	0	0	47.7	0.0
11	224	457	6	GT FALLS	0.40	2	28	28	2	12	15719	48	68	3	12	0	0	0	183	0	59	24.2	0.0
11	224	853	6	GT FALLS	0.45	4	48	68	2	12	15719	48	68	3	12	0	0	0	100	0	0	10.0	0.0
11	225	301	6	GT FALLS	0.22	4	48	68	2	12	15719	48	68	3	12	0	0	0	100	0	0	10.0	0.0
11	225	525	6	GT FALLS	0.10	4	48	70	2	12	15719	48	70	3	12	0	0	0	100	0	0	10.0	0.0
11	225	625	6	GT FALLS	0.09	4	48	68	2	12	7230	48	68	3	12	0	0	0	100	0	0	10.0	0.
				TOTAL FAP 11	14.06																	18.1	2.
12	8	618	10	W YLWSTN	0.67	2	18	50	3	2	1909	24	50	3	12	0	0	0	238	283	0	52.1	0.
				TOTAL FAP 12	0.67																	52.2	0.
13	48	642	9	ENNIS	0.62	2	70	70	2	4	1798	70	70	3	12	0	9	8	200	233	0	45.0	0.
13	49	180	9	ENNIS	0.07	2	22	30	2	4	2127	24	44	3	12	0	0	0	208	233	32	47.3	0.
13	95	730	10	TH FORKS	0.36	2	22	34	3	3	765	24	44	3	12	0	0	0	117	250	23	39.0	0.

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST .	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS					DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
13	96	91	10	TH FORKS	0.46	2	72	72	3	5	1449	72	72	3	12	0	0	0	100	217	0	31.7	0.14
				TOTAL FAP 13	1.51																	38.4	0.58
14	0	0	7	TOWNSEND	0.34	2	56	56	3	12	4912	56	68	3	12	0	0	0	0	0	18	1.8	0.00
14	0	346	7	TOWNSEND	0.26	2	51	51	3	12	5291	51	68	3	12	0	0	0	0	0	25	2.5	0.00
14	0	605	7	TOWNSEND	0.28	2	32	32	3	12	1289	32	44	3	12	0	0	0	0	0	27	2.7	0.00
14	99	338	10	HARLOWTON	0.11	2	45	45	3	12	1064	45	45	3	12	0	0	0	0	0	0	0.0	0.00
14	99	450	10	HARLOWTON	0.89	2	45	45	3	12	2482	45	45	3	12	0	0	0	0	0	0	0.0	0.00
14	129	506	11	RYEGATE	1.00	2	28	30	1	12	1147	28	44	3	12	0	0	0	230	0	32	26.2	0.26
14	168	500	11	ROUNDUP	0.39	2	45	45	2	6	2752	45	45	3	12	0	5	13	200	200	0	41.8	0.16
14	168	895	11	ROUNOUP	0.28	2	66	66	3	6	3620	66	68	3	12	0	0	0	100	200	3	30.3	0.08
14	169	175	11	ROUNOUP	0.28	2	77	77	3	6	5310	77	77	3	12	0	7	18	133	200	0	35.8	0.09
14	169	452	11	ROUNDUP	0.71	2	21	26	3	9	1115	24	44	3	12	0	0	0	154	150	41	34.5	0.24
14	203	707	11	MELSTONE	0.40	2	24	26	2	11	715	24	44	3	12	0	0	0	153	117	41	31.1	0.12
14	204	111	11	MELSTONE	0.50	2	24	40	1	12	715	24	44	3	12	0	0	0	267	100	9	37.6	0.18
14	204	611	11	MELSTONE	0.55	2	24	30	1	12	715	24	44	3	12	0	0	0	267	100	32	39.9	0.22
14	270	502	12	FORSYTH	0.32	2	84	84	1	12	980	84	84	3	12	0	0	0	230	0	0	23.0	0.07
				TOTAL FAP 14	6.31																	22.5	1.42
15	80	824	5	LEWISTOWN	0.13	2	24	32	3	12	1800	24	44	3	12	0	0	0	50	0	27	7.7	0.01
15	80	957	5	LEWISTOWN	1.11	2	53	53	3	12	4510	53	53	3	12	0	0	0	0	0	0	0.0	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FED AID ROUTE	MILEPOST		SPECIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS					DESIGN STDS				PERCENT DEFICIENT							
						NO LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURF	DEPTH BASE	AVE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURF	DEPTH BASE	GRADE	CURVES	DISTANCE	SURFACE	BASE	CRACKING	ROUGHNESS	ACCIDENT RATE
15	82	56	5	LEWISTOWN	0.14	2	33	33	3	12	5840	48	68	3	12	0	0	0	94	0	51	14.5	0.02
15	82	196	5	LEWISTOWN	0.72	2	49	49	3	9	5040	49	68	3	12	0	3	28	0	75	28	13.4	0.09
15	135	594	5	WINNETT	0.18	2	21	24	3	3	272	24	44	3	12	0	0	0	125	250	45	42.0	0.07
15	135	776	5	WINNETT	0.71	2	22	24	3	3	381	24	44	3	12	0	0	0	117	250	45	41.2	0.29
15	212	449	5	JORDAN	0.48	2	52	52	3	5	1551	52	52	3	12	0	0	0	100	217	0	31.7	0.15
15	212	932	5	JORDAN	0.15	2	22	24	3	5	595	24	44	3	12	0	100	34	117	217	45	51.3	0.07
15	278	395	4	CIRCLE	0.33	2	24	24	2	6	787	24	44	3	12	0	0	0	187	200	45	43.2	0.14
15	278	727	4	CIRCLE	0.27	2	24	46	3	12	1440	24	46	3	12	0	0	0	0	0	0	0.0	0.00
15	278	999	4	CIRCLE	0.54	2	24	44	3	12	2282	24	44	3	12	0	0	0	0	0	0	0.0	0.00
15	279	535	4	CIRCLE	0.26	2	24	40	3	12	980	24	44	3	12	0	66	39	0	0	9	11.4	0.02
15	324	644	4	GLENDIVE	1.33	2	32	36	3	12	3572	32	44	3	12	0	0	0	0	0	18	1.8	0.02
15	325	992	4	GLENDIVE	0.68	4	72	72	3	12	7203	72	72	3	12	0	0	0	0	0	0	0.0	0.00
15	326	665	4	GLENDIVE	0.05	4	72	72	3	12	8143	72	72	3	12	0	0	0	0	0	0	0.0	0.00
15	326	719	4	GLENDIVE	0.38	4	72	72	3	12	7550	72	72	3	12	0	0	0	0	0	0	0.0	0.00
15	327	93	4	GLENDIVE	0.67	2	56	56	3	12	7629	56	68	3	12	0	0	0	0	0	18	1.8	0.01
15	327	766	4	GLENDIVE	0.65	4	60	60	3	6	7222	60	68	3	12	0	0	0	0	150	12	16.2	0.10
15	328	439	4	GLENDIVE	0.90	4	56	56	3	12	2624	56	68	3	12	0	0	0	0	0	18	1.8	0.01
15	355	507	12	WIBAUX	0.17	2	24	44	3	12	688	24	44	3	12	0	0	0	0	0	0	0.0	0.00
15	355	680	12	WIBAUX	0.17	2	24	36	3	11	1225	24	44	3	12	0	0	0	133	117	18	26.8	0.04

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST		FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+	•					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
15	356	162	12	WIBAUX	0.39	2	24	30	3	11	662	24	44	3	12	0	0	0	133	117	32	28.2	0.11
15	356	557	12	WIBAUX	0.13	2	24	44	3	12	650	24	44	3	12	0	0	0	0	0	0	0.0	0.00
15	366	150	5	LEWISTOWN	0.50	2	24	28	3	12	818	24	44	3	12	0	0	0	0	0	36	3.6	0.01
15	366	654	5	LEWISTOWN	0.25	2	24	30	3	12	1205	24	44	3	12	0	0	0	0	0	32	3.2	0.00
15	366	904	5	LEWISTOWN	0.26	2	24	28	3	12	1969	24	44	3	12	0	0	0	100	100	36	23.6	0.06
15	367	164	5	LEWISTOWN	0.25	2	24	36	3	12	1971	24	44	3	12	0	0	0	100	100	18	21.8	0.05
15	367	411	4	GLENDIVE	0.84	4	72	88	3	12	3583	72	88	3	12	0	0	0	0	0	0	0.0	0.00
				TOTAL FAP 15	12.64																	10.0	1.27
16	104	144	11	BILLINGS	0.24	4	64	80	3	12	10872	64	80	3	12	0	0	0	0	0	0	0.0	0.00
16	104	389	11	BILLINGS	0.19	2	36	36	3	12	10872	48	68	3	12	0	0	0	75	0	47	12.2	0.02
16	104	584	11	BILLINGS	0.83	2	28	40	2	6	10872	48	68	3	12	0	0	0	222	200	41	46.3	0.38
16	105	272	11	BILLINGS	0.28	4	44	46	3	12	10872	48	68	3	12	0	0	0	117	100	32	24.9	0.06
16	105	551	11	BILLINGS	0.06	4	61	61	3	12	18420	61	68	3	12	0	0	0	0	0	10	1.0	0.00
16	105	610	11	BILLINGS	2.06	4	56	56	3	12	18420	56	68	3	12	0	0	0	0	0	18	1.8	0.03
16	107	699	11	BILLINGS	1.09	2	32	32	2	11	15453	48	68	3	12	0	0	0	167	25	53	24.5	0.26
16	154	452	11	ROUNDUP	0.25	2	69	69	3	7	4404	69	69	3	12	0	30	40	133	183	0	38.6	0.09
16	154	702	11	ROUNDUP	0.26	2	22	36	3	7	3144	24	44	3	12	0	0	0	147	183	18	34.8	0.09
16	154	964	11	ROUNDUP	0.15	2	24	30	3	12	1095	24	44	3	12	0	0	0	133	100	32	26.5	0.04
16	310	919	3	MALTA	0.43	4	48	48	2	7	3823	48	48	3	12	0	0	0	167	183	0	35.0	0.15

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST .	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
16	311	360	3	MALTA	0.16	4	54	54	1	3	4807	54	54	3	12	0	0	0	267	250	0	51.7	0.08
16	311	522	3	MALTA	0.09	2	30	30	2	12	4654	30	44	3	12	0	0	0	100	0	32	13.2	0.01
				TOTAL FAP 16	6.09																	19.9	1.21
17	35	431	4	TERRY	1.00	2	24	30	3	7	1390	24	48	3	12	0	0	0	100	183	38	32.1	0.32
				TOTAL FAP 17	1.00																	32.0	0.32
18	0	0	12	MILES CITY	0.33	2	54	54	3	5	5573	54	68	3	12	0	0	0	100	217	21	33.8	0.11
18	0	339	12	MILES CITY	0.27	2	48	48	2	30	4821	48	48	3	12	0	0	0	200	0	0	20.0	0.05
18	0	611	12	MILES CITY	0.37	2	46	46	1	12	2950	46	46	3	12	0	0	0	230	0	0	23.0	0.08
				TOTAL FAP 18	0.97																	24.7	0.24
19	7	103	9	ANACONDA	1.81	4	48	68	3	12	8464	48	68	3	12	0	0	0	0	0	0	0.0	0.00
19	8	918	9	ANACONDA	0.46	4	50	50	3	12	5537	50	68	3	12	0	0	0	0	0	26	2.6	0.01
19	9	377	9	ANACONDA	0.55	4	93	93	2	10	6931	93	93	3	12	0	0	0	100	50	0	15.0	0.08
19	10	0	9	ANACONDA	0.11	2	24	28	3	12	6931	48	68	3	12	0	0	0	150	0	59	20.9	0.02
19	10	110	9	ANACONDA	2.28	2	24	28	3	12	6014	48	68	3	12	0	0	0	150	0	59	20.9	0.47
19	63	671	8	DRUMMOND	0.29	2	32	32	3	12	742	32	44	3	12	0	0	0	0	0	27	2.7	0.00
				TOTAL FAP 19	5.50																	10.5	0.58
20	0	0	4	GLENDIVE	0.60	2	24	40	3	12	3139	24	44	3	12	0	0	0	0	0	9	0.9	0.00
20	0	605	4	GLENDIVE	0.25	2	24	40	3	12	2558	24	44	3	12	0	0	0	0	0	9	0.9	0.00
20	0	857	4	GLENDIVE	0.90	2	40	44	3	12	1993	24	44	3	12	0	0	0	0	0	0	0.0	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
						SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
20	51 761	4	SIONEY	0.48	4	60	60	3	12	4244	60	68	3	12	0	0	0	0	0	12	1.2	0.00
20	52 226	4	SIONEY	0.21	4	58	58	3	6	6900	58	68	3	12	0	0	0	0	150	15	16.5	0.03
20	52 436	4	SIDNEY	0.13	4	44	60	3	6	3350	48	68	3	12	0	0	0	117	200	12	32.9	0.04
20	62 525	4	FAIRVIEW	0.28	2	20	24	3	8	1930	24	44	3	12	0	0	0	161	167	45	37.3	0.10
20	62 807	4	FAIRVIEW	0.36	2	20	26	3	8	2620	24	44	3	12	0	0	0	161	167	41	36.9	0.13
20	63 204	4	FAIRVIEW	0.29	2	20	24	3	6	3370	24	44	3	12	0	0	0	161	200	45	40.6	0.11
20	63 494	4	FAIRVIEW	0.21	2	64	64	3	7	2980	64	64	3	12	0	0	0	50	125	0	17.5	0.03
20	63 709	4	FAIRVIEW	0.21	2	63	63	2	12	2840	63	63	3	12	0	0	0	100	0	0	10.0	0.02
			TOTAL FAP 20	3.92																	11.7	0.46
21	47 789	6	CONRAD	0.14	2	44	44	3	12	5380	48	68	3	12	0	0	0	25	0	35	6.0	0.00
21	47 930	6	CONRAD	0.38	2	56	56	3	12	5933	56	68	3	12	0	0	0	0	0	18	1.8	0.00
21	47 1308	6	CONRAD	0.47	2	44	44	3	12	4678	48	68	3	12	0	0	0	25	0	35	6.0	0.02
21	47 1775	6	CONRAD	0.06	2	32	32	3	12	5305	48	68	3	12	0	0	0	100	0	53	15.3	0.00
21	47 1833	6	CONRAD	0.17	2	44	44	3	12	4678	48	68	3	12	0	0	0	25	0	35	6.0	0.01
21	47 1852	6	CONRAD	0.07	2	32	32	3	12	4697	48	68	3	12	0	0	0	100	0	53	15.3	0.01
			TOTAL FAP 21	1.29																	3.1	0.04
22	0 0	3	SCOBEY	0.35	2	46	46	3	12	2032	46	46	3	12	0	0	0	0	0	0	0.0	0.00
22	0 348	3	SCOBEY	0.17	2	32	32	3	12	1444	32	44	3	12	0	0	0	0	0	27	2.7	0.00
22	41 167	3	PLENTYWO	1.19	2	47	47	3	12	5460	48	68	3	12	0	0	0	6	0	31	3.7	0.04

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
						SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
22	63.746	3	MEDICNE LK	0.06	2	32	36	3	12	608	32	44	3	12	0	0	0	0	0	18	1.8	0.00
22	64.75	3	MEDICNE LK	0.13	2	32	36	3	12	616	32	44	3	12	0	0	0	0	0	18	1.8	0.00
22	64.205	3	MEDICNE LK	0.14	2	32	32	3	12	616	32	32	3	12	0	0	0	0	0	0	0.0	0.00
22	75.857	3	FROID	0.02	2	32	32	3	12	690	32	44	3	12	0	0	0	0	0	27	2.7	0.00
22	88.489	3	CLBERTSON	0.13	2	43	43	3	12	735	43	44	3	12	0	0	0	0	0	2	0.2	0.00
22	88.690	3	CLBERTSON	0.55	2	44	44	3	12	998	44	44	3	12	0	0	0	0	0	0	0.0	0.00
22	89.200	3	CLBERTSON	0.32	2	32	32	3	12	1834	32	44	3	12	0	0	0	0	0	27	2.7	0.00
22	125.0	4	SIDNEY	0.68	2	24	36	3	6	3040	24	44	3	12	0	0	0	120	200	18	33.8	0.23
22	125.685	4	SIDNEY	0.35	2	48	48	3	11	4412	48	68	3	12	0	11	14	120	117	29	29.1	0.10
			TOTAL FAP 22	4.09																	9.0	0.37
23	0.0	12	MILES CTY	0.48	2	48	48	3	6	5744	48	68	3	12	0	0	0	100	200	29	32.9	0.15
23	0.489	12	MILES CTY	0.28	2	22	26	2	8	4157	24	44	3	12	0	0	0	208	167	41	41.6	0.11
23	1.135	12	MILES CTY	0.59	2	22	25	2	5	4157	24	44	3	12	5	15	51	208	217	43	53.9	0.31
23	1.722	12	MILES CTY	0.25	2	24	26	2	5	1933	24	44	3	12	0	0	0	200	217	41	45.8	0.11
23	1.972	12	MILES CTY	0.14	2	22	25	2	5	1310	24	44	3	12	0	0	0	208	217	43	46.8	0.06
23	79.165	12	BROADUS	0.23	2	20	24	1	2	1770	24	44	3	12	0	0	22	272	267	45	60.6	0.13
23	79.394	12	BROADUS	0.34	2	24	42	3	7	2000	24	44	3	12	0	6	29	100	183	5	32.3	0.10
			TOTAL FAP 23	2.31																	42.0	0.97
25	0.0	4	CIRCLE	0.05	2	30	30	3	12	734	30	44	3	12	0	0	96	0	0	32	12.8	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
					NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
						SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
25	52 + 376	3	WLF POINT	0.23	2	66	66	3	6	4660	66	66	3	12	0	0	0	133	200	0	33.3	0.07
25	52 + 608	3	WLF POINT	0.06	4	63	63	3	7	6890	63	68	3	12	0	0	0	133	183	7	32.3	0.01
25	52 + 667	3	WLF POINT	0.01	2	30	30	3	12	8230	48	68	3	12	0	0	0	113	0	56	16.9	0.00
25	52 + 679	3	WLF POINT	0.12	4	51	51	3	12	8230	51	68	3	12	0	0	0	0	0	25	2.5	0.00
25	52 + 798	3	WLF POINT	0.06	4	52	56	3	8	8230	52	68	3	12	0	0	0	0	100	18	11.8	0.00
			TOTAL FAP 25	0.53																	15.1	0.08
27	0 + 0	12	EKALAKA	0.35	2	22	24	2	12	428	24	44	3	12	48	0	0	178	100	45	37.1	0.13
27	34 + 643	12	BAKER	0.60	2	24	32	1	4	1415	24	44	3	12	0	0	8	253	233	27	52.1	0.31
27	35 + 236	12	BAKER	0.14	2	24	30	2	4	1794	24	44	3	12	0	0	69	167	233	32	50.1	0.07
27	35 + 380	12	BAKER	0.06	2	74	74	3	5	3588	74	74	3	12	0	0	0	133	217	0	35.0	0.02
27	35 + 445	12	BAKER	0.06	2	74	74	3	5	4640	74	74	3	12	0	0	0	133	217	0	35.0	0.02
27	35 + 510	12	BAKER	0.24	2	78	78	3	12	1563	78	78	3	12	0	0	0	100	100	0	20.0	0.04
27	79 + 102	12	WIBAUX	0.66	2	22	26	2	12	1740	24	44	3	12	0	0	8	178	100	41	32.7	0.21
27	79 + 763	12	WIBAUX	0.31	2	22	40	3	7	3290	24	44	3	12	0	0	16	147	183	9	35.5	0.11
			TOTAL FAP 27	2.42																	37.6	0.91
28	68 + 346	11	REO LOOGE	0.23	2	22	24	2	5	1250	24	44	3	12	0	0	0	208	217	45	47.0	0.10
28	68 + 690	11	REO LODGE	0.63	2	22	26	3	4	3215	24	44	3	12	0	13	8	117	233	41	41.2	0.25
28	69 + 303	11	REO LOOGE	0.48	2	50	50	3	5	4410	50	50	3	12	0	0	0	0	175	0	17.5	0.08
28	69 + 782	11	REO LODGE	0.47	2	22	26	2	8	2020	24	44	3	12	0	33	32	208	167	41	48.1	0.22

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST		FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
							SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
28	95	389	11	JOLIET	1.05	2	44	44	3	12	2000	44	44	3	12	0	0	0	50	0	0	5.0	0.05
				TOTAL FAP 28	2.86																	24.5	0.70
29	0	0	9	ENNIS	0.08	2	22	26	2	4	1273	24	44	3	12	0	0	0	208	233	41	48.2	0.04
29	0	104	9	ENNIS	0.14	2	24	26	2	3	1255	24	44	3	12	0	55	71	167	250	41	58.4	0.08
29	13	53	9	VRGNA CY	0.84	2	24	28	2	10	567	24	44	3	12	104	23	6	100	50	36	31.9	0.26
29	13	890	9	VRGNA CY	0.60	2	24	30	3	8	908	24	44	3	12	6	16	17	133	167	32	37.1	0.22
29	14	495	9	VRGNA CY	0.33	2	20	24	3	8	661	24	44	3	12	0	0	0	161	167	45	37.3	0.12
29	33	97	9	SHERIDAN	0.39	2	78	78	3	11	1790	78	78	3	12	0	0	0	133	117	0	25.0	0.09
29	33	483	9	SHERIDAN	0.72	2	20	24	3	7	1000	24	44	3	12	0	0	0	133	183	45	36.1	0.25
29	42	237	9	TWN BRDGES	0.21	2	24	44	3	12	2119	24	44	3	12	0	0	0	0	0	0	0.0	0.00
29	42	452	9	TWN BRDGES	0.39	4	52	72	3	12	2567	52	72	3	12	0	0	0	0	0	0	0.0	0.00
29	42	844	9	TWN BRDGES	0.41	4	52	72	3	12	1748	52	72	3	12	0	0	0	0	0	0	0.0	0.00
29	85	977	9	BUTTE	0.70	2	22	22	1	3	4620	24	44	3	12	0	0	0	257	250	50	55.7	0.38
29	86	677	9	BUTTE	0.60	2	53	53	1	5	7140	53	53	3	12	0	0	0	253	217	0	47.0	0.28
29	87	277	9	BUTTE	0.12	4	64	70	4	12	4059	64	70	3	12	0	0	0	33	100	0	13.3	0.01
29	87	399	9	BUTTE	0.08	4	64	70	3	12	8990	64	70	3	12	0	0	0	0	0	0	0.0	0.00
29	87	479	9	BUTTE	0.31	4	70	70	3	12	8990	70	70	3	12	0	0	0	50	0	0	5.0	0.01
29	87	788	9	BUTTE	0.38	4	66	66	3	12	13530	66	68	3	12	0	0	0	50	0	3	5.3	0.02
				TOTAL FAP 29	6.30																	27.9	1.76

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST +	MILEPOST .	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO LANES	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH ROADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
30	23	396	3	WEST8Y	0.47	2	20	26	2	7	860	24	40	3	12	0	0	0	217	183	35	43.5	0.20
30	23	870	3	WEST8Y	0.19	2	69	69	2	7	860	69	69	3	12	0	0	0	200	183	0	38.3	0.07
30	24	72	3	WEST8Y	0.15	2	22	26	2	6	860	24	44	3	12	0	0	0	208	200	41	44.9	0.06
				TOTAL FAP 30	0.81																	40.7	0.33
32	50	788	3	SCO8EY	0.05	2	44	44	3	8	840	44	44	3	12	0	0	0	0	100	0	10.0	0.00
32	50	838	3	SCO8EY	0.34	2	47	47	3	8	2200	47	47	3	12	0	0	0	0	100	0	10.0	0.03
32	51	179	3	SCO8EY	0.13	2	24	44	3	12	3390	24	44	3	12	0	0	0	0	0	0	0.0	0.00
32	51	317	3	SCO8EY	0.07	2	56	56	3	12	3080	56	56	3	12	0	0	0	0	0	0	0.0	0.00
32	51	393	3	SCO8EY	0.13	2	26	30	2	10	2100	26	44	3	12	0	0	0	167	133	32	33.2	0.04
32	51	521	3	SCO8EY	0.22	2	52	52	1	12	1121	52	52	3	12	0	0	0	253	100	0	35.3	0.07
				TOTAL FAP 32	0.94																	14.9	0.14
33	0	0	1	LI88Y	0.44	2	44	44	3	12	5430	48	68	3	12	0	0	0	25	0	35	6.0	0.02
33	0	453	1	LI88Y	0.20	2	37	37	1	12	5603	48	68	3	12	0	0	0	269	100	46	41.5	0.08
				TOTAL FAP 33	0.64																	15.6	0.10
36	47	760	8	HOT SPRGS	0.25	2	24	46	1	9	842	24	44	3	12	0	0	0	250	75	0	32.5	0.08
				TOTAL FAP 36	0.25																	32.0	0.08
38	6	405	1	CLM8A FLS	0.72	2	24	34	3	7	8120	48	68	3	12	0	0	0	217	183	50	45.0	0.32
38	7	125	1	CLMBA FLS	0.26	2	24	28	3	5	4410	24	44	3	12	0	43	38	133	217	36	46.7	0.12
				TOTAL FAP 38	0.98																	44.9	0.44

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST		FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+	•					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
42	75	417	3	GLASGOW	0.23	2	36	40	3	6	1878	36	44	3	12	0	0	0	100	200	9	30.9	0.07
42	75	646	3	GLASGOW	0.35	4	50	50	3	12	2740	50	68	3	12	0	0	0	133	100	26	25.9	0.09
42	76	0	3	GLASGOW	0.14	2	30	30	3	12	6880	48	68	3	12	0	0	0	175	100	56	33.1	0.04
				TOTAL FAP 42	0.72																	27.8	0.20
43	0	0	5	LEWISTOWN	0.30	4	50	50	3	12	5790	50	68	3	12	0	0	0	0	0	26	2.6	0.00
43	0	312	5	LEWISTOWN	0.21	2	22	28	3	6	4690	24	44	3	12	0	0	0	117	200	36	35.3	0.07
43	0	522	5	LEWISTOWN	0.10	2	20	24	3	6	2630	24	44	3	12	0	0	0	133	200	45	37.8	0.03
				TOTAL FAP 43	0.61																	16.4	0.10
45	0	0	10	BIG TMBR	0.52	2	20	24	3	4	900	24	44	3	12	0	0	0	231	267	45	54.3	0.28
45	43	874	10	HARLOWTON	0.06	2	44	44	3	12	929	44	44	3	12	0	0	156	0	0	0	15.6	0.00
45	62	860	10	JUOTH GAP	0.62	2	24	36	3	12	990	24	44	3	12	0	0	8	50	0	18	7.6	0.04
				TOTAL FAP 45	1.20																	26.7	0.32
48	0	1187	11	HARDIN	0.14	2	26	40	3	5	3505	26	44	3	12	0	0	0	133	217	9	35.9	0.05
48	0	1327	11	HARDIN	0.08	2	40	40	3	5	3523	40	44	3	12	0	0	0	100	217	9	32.6	0.02
48	0	1406	11	HARDIN	0.34	2	54	54	1	0	2431	54	54	3	12	0	0	0	267	300	0	56.7	0.19
48	0	1742	11	HARDIN	0.16	2	0	0	0	0	4600	24	48	3	12	100	100	91	300	300	100	99.1	0.16
48	0	2398	11	HARDIN	0.06	2	24	24	3	0	2280	24	44	3	12	0	0	0	200	300	45	54.5	0.03
48	0	2456	11	HARDIN	0.12	2	40	40	3	12	2996	40	44	3	12	0	0	0	0	0	9	0.9	0.00
				TOTAL FAP 48	0.90																	50.0	0.45

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID ROUTE	MILEPOST		FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EQUIVALENT DEFICIENT MILEAGE
						NO. LANES	WIDTH		DEPTH		AVERAGE DAILY TRAFFIC	WIDTH		DEPTH		EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	ROADWAY	TOTAL	
	+	•					SURFACE	ROADWAY	SURFACE	BASE		SURFACE	ROADWAY	SURFACE	BASE								
49	0	437	9	DILLON	0.14	2	40	40	3	12	4634	40	44	3	12	0	0	0	100	100	9	20.9	0.02
49	26	873	9	TWN BRDGS	0.29	2	20	24	3	10	905	24	44	3	12	0	0	0	133	133	45	31.1	0.09
49	27	161	9	TWN BRDGS	0.31	2	32	32	3	10	1277	32	32	3	12	0	0	0	100	133	0	23.3	0.07
49	27	473	9	TWN BRDGS	0.13	2	46	46	3	10	1277	46	46	3	12	0	0	0	100	133	0	23.3	0.03
				TOTAL FAP 49	0.87																	24.1	0.21
50	0	0	10	W YLOWSTON	0.36	4	70	70	3	12	3410	48	68	3	12	0	0	0	0	0	0	0.0	0.00
50	0	367	10	W YLWSTN	0.19	4	70	70	3	12	2780	48	68	3	12	0	0	0	0	0	0	0.0	0.00
50	87	95	10	BOZEMAN	0.12	4	52	52	3	12	6147	52	68	3	12	0	0	0	0	0	24	2.4	0.00
50	87	216	10	BOZEMAN	0.56	2	36	36	3	12	12350	48	68	3	12	0	0	0	75	0	47	12.2	0.06
50	87	781	10	BOZEMAN	0.54	4	90	90	3	12	22210	90	90	3	12	0	0	0	0	0	0	0.0	0.00
50	88	315	10	BOZEMAN	0.12	4	59	59	3	12	14260	59	59	3	12	0	0	0	0	0	0	0.0	0.00
50	88	833	10	BOZEMAN	0.70	4	52	72	3	12	16880	52	72	3	12	0	0	0	0	0	0	0.0	0.00
50	89	529	10	BOZEMAN	0.40	4	62	62	3	12	12410	62	68	3	12	0	0	0	0	0	9	0.9	0.00
50	90	101	10	BOZEMAN	0.53	4	68	82	3	12	14645	68	82	3	12	0	0	0	0	0	0	0.0	0.00
50	90	630	10	BOZEMAN	0.19	3	56	76	3	12	8220	56	76	3	12	0	0	0	0	0	0	0.0	0.00
				TOTAL FAP 50	3.71																	1.6	0.06
51	27	212	4	RICHEY	0.31	2	28	28	3	7	265	28	44	3	12	0	0	0	0	125	36	16.1	0.05
				TOTAL FAP 51	0.31																	16.1	0.05
53	0	0	11	BILLINGS	0.28	4	72	72	3	12	6310	72	72	3	12	0	0	0	0	0	0	0.0	0.00

DEFICIENCY RATINGS
URBAN PRIMARY SYSTEM

FEDERAL AID RDUTE	MILEPOST +	MILEPOST •	FINANCIAL DISTRICT	CITY OR URBAN AREA	SECTION LENGTH	PRESENT CONDITIONS						DESIGN STDS.				PERCENT DEFICIENT							EDUIVALENT DEFICIENT MILEAGE
						ND. LANES	WIDTH SURFACE	WIDTH RDADWAY	DEPTH SURFACE	DEPTH BASE	AVERAGE DAILY TRAFFIC	WIDTH SURFACE	WIDTH RDADWAY	DEPTH SURFACE	DEPTH BASE	EXCESS GRADES	EXCESS CURVES	SIGHT DISTANCE	SURFACE	BASE	RDADWAY	TDTAL	
53	0	276	11	BILLINGS	0.86	4	72	72	3	12	7770	72	73	3	12	0	0	0	0	0	1	0.1	0.00
53	0	1139	11	BILLINGS	0.23	4	50	50	3	5	11090	50	68	3	12	0	0	0	100	217	26	34.3	0.07
53	0	1368	11	BILLINGS	0.58	4	50	50	5	5	9550	50	68	3	12	0	0	0	0	217	26	24.3	0.14
53	1	579	11	BILLINGS	0.57	4	50	50	2	8	12740	50	68	3	12	0	0	0	167	167	26	36.0	0.20
53	2	119	11	BILLINGS	0.84	4	48	64	3	12	9210	48	68	3	12	0	0	0	0	0	6	0.6	0.00
53	2	959	11	BILLINGS	1.31	2	32	32	3	12	2300	32	44	3	12	0	0	0	0	0	27	2.7	0.03
53	31	558	11	BROADVIEW	0.48	2	22	24	2	8	1160	24	44	3	12	0	4	21	208	167	45	44.5	0.21
53	45	389	11	LAVINA	0.87	2	26	30	1	12	912	26	44	3	12	0	0	0	253	100	32	38.5	0.33
				TOTAL FAP 53	6.02																	16.3	0.98
	GRAND TOTAL FAP				177.93																		33.70

Sufficiency Ratings by Section - Statewide

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS 8T	IM	SECTION LENGTH	WIDTH SRF	SUF RCY	TYP	ACT	OHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- FND	SPF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
																					.2
P002	705+0.494	FUT W SUPERIOR INT	MINERAL	8			.200	NON EXISTENT													.7
P003	463+0.467	OILLON	BEAVERHEAD	9			.699	NON EXISTENT													1.0
P016	311+0.617	LODGE GRASS	BIG HORN	11			1.000	NON EXISTENT													1.3
P016	312+0.617	WYOLA	BIG HORN	11			1.300	NON EXISTENT													2.5
P029	83+0.477	JCT FAS 393	SILVER BOW	9			2.500	NON EXISTENT													2.4
P050	98+0.016	MADISON CO LINE	MADISON	5			2.448	NON EXISTENT													6.6
P050	93+0.837	3.0 W RTE 50	GALLATIN	10			6.627	NON EXISTENT													.5
P048	0+1.906	HARDIN	BIG HORN	11			.492	NON EXISTENT													1.6
P008	46+0.476	HELENA	LEWIS AND CLARK	7	36	36	2.094	24	30	PMS	7265	871	524	0	12	3	3	5	23	12	2.7
P005	0+0.240	0.2 N FAI 90	MISSOULA	6	34	55	3.470	20	24	PMS	3874	565	239	0	13	7	1	0	21	14	1.2
P001	138+0.380	JCT FAP RTE 38	FLATHEAD	1	34	66	1.705	24	30	RMS	4122	787	365	0	13	8	7	0	28	19	.3
P038	7+0.387	COLUMBIA FALLS	FLATHEAD	1	37	55	.372	22	24	PMS	3260	456	243	0	11	7	7	2	27	19	2.9
P024	12+0.237	11.3 E BONNER	MISSOULA	8	41	63	3.821	24	24	RMS	1671	275	145	0	14	6	2	2	24	20	.4
P038	8+0.078	0.6 E COL FALLS	FLATHEAD	1	37	55	.577	22	24	RMS	3260	456	280	0	11	6	6	6	29	21	1.4
P052	28+0.294	FLATHEAD CO	FLATHEAD	1	36	64	2.004	24	24	RMS	1892	280	187	0	13	5	2	8	28	23	5.1
P052	0+0.000	JCT FAP RTE 5	LAKE	1	40	50	7.134	21	24	BST	1929	285	184	0	13	7	1	7	28	23	7.5
P001	142+0.567	1.0 W HUNGRY HORSE	FLATHEAD	1	31	34	10.886	20	24	RMS	2480	473	415	0	12	5	1	13	31	24	1.0
P005	4+0.000	3.7 N JCT FAI 90	MISSOULA	8	48	54	1.536	24	32	RMS	3768	550	182	2	14	7	10	0	33	24	2.4
P001	124+0.638	0.7 E KALISPELL	FLATHEAD	1	40	64	3.634	30	30	RMS	3230	516	327	3	13	8	4	6	34	25	1.4
P007	44+0.554	JCT FAP 35	RAVALLI	8	34	59	2.060	22	24	PMS	3506	455	627	0	8	4	3	19	34	25	1.4
P052	30+0.238	2.0 N FLATHEAD CO	FLATHEAD	1	56	56	1.975	24	28	RMS	2176	322	177	0	14	10	4	3	31	25	1.4
P038	4+0.134	0.3 W FAS 206	FLATHEAD	1	39	53	2.274	24	24	PMS	4729	662	759	0	9	8	2	17	36	25	1.5
P001	221+2.488	0.8 S BROWNING	GLACIER	2	32	70	1.926	22	24	RMS	2776	535	254	4	18	9	2	0	33	26	1.3
P001	221+1.600	BROWNING	GLACIER	2	35	53	.888	24	24	RMS	3352	653	423	3	16	9	1	7	36	27	.6
P007	48+0.000	HAMILTON	RAVALLI	8	40	40	1.731	24	30	RMS	4267	554	780	0	10	4	5	19	38	27	1.1
P001	220+0.489	1.3 W BROWNING	GLACIER	2	45	45	1.390	24	24	PMS	1762	343	278	0	13	7	2	11	33	28	.9
P004	52+0.255	1.4 N YELLOWST CO	YELLOWSTONE	11	22	39	1.598	24	30	RMS	5382	699	652	3	15	7	2	14	41	28	.9
P024	0+1.845	BONNER	MISSOULA	8	36	37	4.039	30	30	RMS	2062	340	258	3	16	4	1	10	34	28	2.7
P024	7+0.551	6.7 E BONNER	MISSOULA	8	40	42	4.668	20	24	PMS	1737	286	260	0	13	5	2	14	34	29	3.1
P011	217+0.349	FAS RTES 227 & 228	CASCADE	6	39	71	.996	32	32	RMS	3593	467	268	4	19	10	2	4	39	29	.6
P005	79+0.397	1.8 N JCT FAP 36	LAKE	1	32	52	6.932	22	24	PMS	1319	178	303	0	7	4	1	21	33	30	4.6
P005	15+0.054	LAKE CO	LAKE	1	40	40	3.437	24	30	RMS	3414	498	468	0	12	8	6	14	40	30	2.1
P005	24+0.366	9.3 N LAKE CO	LAKE	1	55	60	3.147	32	32	PMS	3410	497	268	6	18	10	4	2	40	30	1.9
P001	25+0.405	6.4 W LIBBY	LINCOLN	1	38	62	4.437	24	24	RMS	2015	261	530	0	9	3	1	23	36	30	2.8
P001	16+0.932	JCT FAS RTE 202	LINCOLN	1	34	38	4.574	20	24	PMS	1550	201	211	0	12	3	3	16	34	30	3.0
P005	128+0.492	WHITEFISH	FLATHEAD	1	34	54	6.201	22	23	RMS	1270	165	202	0	10	4	1	18	33	31	4.2
P023	77+0.811	1.5 S FAP 37	POWDER RIVER	12	28	36	1.305	20	22	BST	1484	215	250	0	13	4	1	17	35	31	.8
P022	121+0.331	3.6 N SIONEY	RICHLAND	4	37	49	3.663	24	26	RMS	2019	302	277	0	11	9	3	14	37	31	2.3
P052	26+0.286	2.0 S FLATHEAD CO	LAKE	1	36	59	1.995	24	24	RMS	1758	260	174	0	13	5	10	8	36	31	1.3
P052	32+0.227	1.7 S FAS 208	FLATHEAD	1	22	49	1.691	24	24	RMS	2427	359	431	0	11	6	3	18	38	31	1.0
P024	22+0.634	6.6 E POTOMAC	MISSOULA	8	41	49	4.023	25	25	BST	1615	266	182	0	8	7	13	8	36	32	2.6
P007	31+0.292	DAPBY	RAVALLI	8	34	35	11.755	18	24	PMS	2043	265	414	0	10	6	2	20	38	32	7.3
P006	76+0.261	PLAINS	SANDERS	8	31	34	.380	18	24	PMS	1724	256	259	0	11	3	8	15	37	32	.2
P006	76+0.641	JCT FAP 36	SANDERS	8	31	34	2.278	18	24	RMS	1203	179	238	0	12	3	0	19	34	32	1.5
P001	140+0.073	1.7 E FAP 38	FLATHEAD	1	29	65	2.443	24	24	RMS	3673	701	556	4	16	10	1	11	42	32	1.4
P001	180+0.514	16.2 W GLACIER CO	FLATHEAD	1	33	35	3.632	18	20	PMS	700	133	199	0	8	3	0	20	31	32	2.5
P005	35+0.331	2.3 N ST IGNATIUS	LAKE	1	50	50	5.797	24	30	RMS	3224	470	453	0	15	8	4	14	41	32	3.4
P014	167+0.532	JCT FAP RTE 16	MUSSELSHELL	11	33	56	.969	26	30	RMS	2573	334	780	0	10	6	1	24	41	33	.6
P020	52+0.570	SIONEY	PICHLAND	4	35	35	6.066	20	24	PMS	2444	317	421	0	11	5	5	19	40	33	3.6
P020	58+0.614	6.1 N SIONEY	RICHLAND	4	35	35	3.906	20	24	RMS	1612	209	280	0	11	5	2	19	37	33	2.5
P052	18+0.000	YELLOW BAY	LAKE	1	37	65	5.585	24	24	RMS	1644	243	301	0	11	7	2	18	38	34	3.5
P016	108+0.821	FAP 2 N BILLINGS	YELLOWSTONE	11	34	51	5.074	20	24	BST	1565	203	396	0	10	5	1	22	38	34	3.1
P005	86+0.330	2.0 S ROLLINS	LAKE	1	33	65	6.417	24	24	RMS	1375	185	335	0	10	4	1	22	37	34	4.0
P006	51+0.570	THOMPSON FALLS	SANDERS	8	35	36	1.883	20	24	RMS	1539	224	290	0	11	6	3	18	38	34	1.2
P003	430+0.315	JCT FAS RTE 445	GLACIER	2	28	40	8.213	18	24	RMS	882	171	280	0	9	4	0	21	34	34	5.4

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	ST	IM	SECTION LENGTH	WIDTH SRF	RCY	SUF TYP	ADT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SPF	OPN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ04	57+0.393	2.1 E LAUREL	YELLOWSTONE	11	23	68	.593	55	55	RMS	2658	345	289	3	18	8	1	12	42	34	.3
PJ01	128+0.337	JCT FAP RTE 52	FLATHEAD	1	34	51	10.056	22	24	PMS	2415	461	716	0	10	8	4	20	42	35	5.8
PJC5	179+C.692	EUREKA	LINCOLN	1	43	57	1.37C	22	24	PMS	1869	242	357	0	11	8	1	20	40	35	.8
PJ05	168+0.284	FORTINE	LINCOLN	1	33	51	9.654	22	22	RMS	1279	166	396	0	8	5	1	24	38	35	6.0
PJ12	8+0.047	0.6 W WEST YELL	GALLATIN	10	30	30	.571	24	24	RMS	1857	428	739	0	10	3	6	21	40	35	.3
PJ52	7+0.124	7.1 N FAP 5	LAKE	1	47	47	3.214	24	24	BST	1153	170	187	0	13	6	2	16	37	35	2.0
PJ52	41+0.541	CRESTON	FLATHEAD	1	34	55	3.975	22	24	RMS	1614	238	390	0	11	4	3	21	39	35	2.4
PJ33	0+0.658	LIBBY	LINCOLN	1	59	59	.558	26	37	BST	3523	457	397	5	16	10	1	13	45	35	.3
PJ48	1+0.060	JCT FAI 90	BIG HORN	11	70	70	.284	40	40	RMS	1743	244	120	7	23	10	1	0	41	36	.2
PJ14	133+0.003	2.5 E RYEGATE	GOLDEN VALLEY	11	37	55	3.979	21	24	RMS	968	125	147	0	13	6	1	17	37	36	2.5
PJC1	15+0.265	TROY	LINCOLN	1	37	38	1.655	2C	24	RMS	1846	239	365	0	11	5	5	20	41	36	1.0
PJ01	106+0.450	12.9 W KALISPELL	FLATHEAD	1	49	63	6.886	24	27	RMS	1455	189	198	0	12	8	4	16	40	36	4.1
PJ16	113+0.903	5.0 N FAP 2	YELLOWSTONE	11	34	51	11.673	20	24	BST	1167	151	255	0	11	6	1	21	39	37	7.1
PJ16	150+C.202	KLEIN	MUSSELSHELL	11	32	32	1.838	20	24	BST	1563	203	283	0	13	8	1	19	41	37	1.1
PJ07	26+0.490	JCT FAS 473	RAVALLI	8	36	59	4.000	22	26	PMS	1647	214	453	0	10	6	2	23	41	37	2.4
PJ52	33+0.928	JCT FAS RTE 208	FLATHEAD	1	34	55	7.644	22	24	RMS	1425	21C	390	0	13	4	1	22	40	37	4.6
PJ50	81+0.910	JCT FAS 289 291	GALLATIN	10	60	60	5.208	36	36	PMS	4455	668	283	8	26	10	5	0	49	37	2.7
PJ53	6+0.308	2.0 N BILLINGS	YELLOWSTONE	11	48	48	9.590	20	24	RMS	1161	150	185	0	13	8	1	18	40	38	5.8
PJ38	8+0.655	1.3 E CCL FALLS	FLATHEAD	1	71	71	.242	44	44	PMS	3260	456	326	8	21	10	0	9	48	38	.1
PJ43	0+0.626	LEWISTOWN LIMITS	FERGUS	5	21	21	1.143	18	24	PCC	2504	325	319	0	13	7	11	15	46	38	.6
PJ08	30+0.001	2.2E LEW & CL CO	LEWIS AND CLARK	7	31	35	4.187	24	30	PMS	1463	190	364	0	13	5	2	22	42	38	2.4
PJC6	103+C.023	7.4 E PERMA	SANDERS	8	22	57	1.701	20	24	RMS	756	112	281	0	10	3	0	24	37	38	1.1
PJ07	43+0.041	1.5 S FAP 35	RAVALLI	8	49	49	1.501	30	30	BST	2225	289	345	4	14	9	1	17	45	38	.8
PJ15	26+0.568	4.7 E GEYSER	JUDITH BASIN	6	36	5C	6.61C	22	25	PMS	1240	147	243	0	11	6	2	21	40	38	4.0
PJ01	229+0.880	1.1 E BLACKFOOT	GLACIER	2	25	63	2.119	24	24	RMS	1309	209	478	C	12	5	1	23	41	38	1.3
PJ01	224+0.000	JCT FAP RTE 3	GLACIER	2	35	61	4.927	22	24	PMS	1447	231	324	0	12	8	3	19	42	38	2.9
PJC3	319+0.191	TETON CO	TETON	6	21	32	2.966	20	22	BST	1424	185	397	0	13	4	1	23	41	38	1.7
PJ05	33+0.097	0.3 N ST IGNATIUS	LAKE	1	56	60	1.843	32	32	PMS	3352	489	503	4	13	10	7	15	49	39	.9
PJ01	21+0.505	4.6 E FAS 202	LINCOLN	1	37	70	3.927	25	26	RMS	1795	233	528	0	9	4	8	23	44	39	2.2
PJG6	108+0.148	DIXON	SANDERS	8	27	50	7.086	20	24	RMS	985	146	406	C	10	4	1	25	40	39	4.3
PJ08	0+0.000	JCT FAI 90	POWELL	8	31	53	3.913	24	24	RMS	1158	150	249	0	13	6	1	21	41	39	2.3
PJC8	34+C.269	1.1 E ENO FHR 28	LEWIS AND CLARK	7	33	54	5.345	22	30	PMS	1729	224	367	0	13	8	2	21	44	39	3.0
PJ06	105+0.123	1.4 W DIXON	SANDERS	8	22	34	1.062	22	24	RMS	781	116	378	0	9	3	1	25	38	39	.7
PJ11	211+0.469	7.0 N FAS 331	CASCADE	6	42	52	5.894	26	31	PMS	2641	343	340	3	16	10	3	15	47	39	3.1
PJ25	44+0.762	1.8 S ROOSEVELT	MCCONE	4	30	36	1.745	20	24	BST	780	101	126	0	13	6	1	18	38	39	1.1
PJ24	0+0.000	JCT FAI 90	MISSOULA	8	74	74	.975	44	44	PMS	4008	661	344	10	28	10	2	1	51	40	.5
PJ50	90+0.824	SPUR RTE 50	GALLATIN	10	72	72	3.000	34	34	GPV	746	110	535	0	0	10	2	27	39	40	1.8
PJ11	55+0.874	LIVINGSTON	PARK	10	34	34	2.078	20	24	PMS	2257	293	610	0	13	7	4	23	47	40	1.1
PJ06	53+0.427	2.1 E THOMP FALLS	SANDERS	8	35	36	2.680	20	24	RMS	1288	191	255	0	12	8	4	19	43	40	1.5
PJC6	78+0.947	2.3 E JCT FAP 36	SANDERS	8	31	51	6.128	20	24	RMS	1106	164	406	0	12	5	1	24	42	40	3.6
PJ16	129+0.140	MUSSELSHELL CO	MUSSELSHELL	11	34	34	4.505	22	24	RMS	1149	149	502	0	9	6	1	26	42	40	2.6
PJ01	37+0.888	5.1 E LIBBY	LINCOLN	1	36	61	6.390	24	24	RMS	1229	159	353	0	11	7	1	23	42	40	3.7
PJC1	541+0.099	0.3 W GLASGOW	VALLEY	3	48	48	.328	24	26	PMS	5839	788	638	0	15	8	20	11	54	40	.2
PJ05	0+0.000	JCT FAI 90	MISSOULA	8	66	66	.240	36	36	PMS	3954	577	392	8	23	10	2	8	51	40	.1
PJ03	425+0.053	JCT SPUR FAP RTE 1	GLACIER	2	28	68	5.269	24	24	PMS	834	162	351	0	13	4	0	23	40	40	3.2
PJ04	26+0.285	8PIOGEP	CARBON	11	23	51	6.413	22	24	RMS	1818	236	453	C	13	6	4	22	45	40	3.5
PJC3	299+0.631	I 15 VAUGHN	CASCADE	6	55	71	1.235	28	32	RMS	3268	424	396	5	18	10	4	14	51	41	.6
PJC1	153+0.428	JCT W GLACIER SPUR	FLATHEAD	1	48	49	3.2C5	24	28	PMS	975	186	129	6	19	7	2	8	42	41	1.9
PJ01	240+0.263	4.8 E FAS 444	GLACIER	2	27	60	6.292	24	24	RMS	1273	190	534	0	12	4	3	25	44	41	3.5
PJ01	211+0.317	2.1 E SPUR RTE 1	GLACIER	2	39	54	9.156	26	30	RMS	1152	220	353	0	13	8	1	21	43	41	5.2
PJ16	161+C.094	6.0 N ROUNDUP	MUSSELSHELL	11	35	35	9.033	20	24	BST	832	108	425	0	7	4	4	26	41	41	5.3
PJ16	127+0.243	1.8 S MUSSEL CO	YELLOWSTONE	11	34	58	1.815	22	24	PMS	1107	143	272	0	13	7	1	22	43	41	1.0
PJ06	68+0.701	WEEKSVILLE	SANDERS	8	38	52	3.89C	20	24	PMS	944	14C	233	0	14	4	3	21	42	41	2.3
PJ08	49+0.860	EAST HELENA	LEWIS AND CLARK	7	36	36	2.962	24	30	PMS	2715	415	5C0	3	17	7	4	18	49	41	1.5
PJ06	115+0.193	LAKE CO	LAKE	1	34	52	.936	20	24	RMS	1045	155	387	0	9	8	1	24	42	41	.5

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEAPS DIST	SECTION LENGTH	WIOTH SRF	SUF RDY	TYP	ADT	OHV	SEPVICE VOLUME	----SUFFICIENCY PATINGS---- END	SRF	DRN	SAF	CAP	TCT	ADJ	OEFIC MILES
PJ10	52+0.381	LOMA	CHOUTEAU	6 34 63	2.763	22	24	RMS	1161	150	380	0	9	8	2	24	43	41	1.6
PJ11	218+0.360	2.0 E GREAT FALLS	CASCADE	6 39 71	2.019	32	32	RMS	4074	529	324	5	18	10	13	6	52	41	1.0
PJ10	51+0.544	0.6 S LOMA	CHOUTEAU	6 36 36	.677	24	24	RMS	1131	147	335	C	12	8	0	23	43	41	.4
PJ49	3+0.037	3.0 E FAI RTE 15	BEAVERHEAD	9 36 46	3.798	20	24	RMS	1033	134	220	0	11	8	2	21	42	41	2.2
PJ29	80+0.192	JCT FAS 375	SILVER BOW	9 28 71	3.280	24	30	RMS	1208	157	331	0	11	8	1	23	43	41	1.9
PJ29	49+0.920	6.6 N TWIN BRIDGES	MADISON	9 36 36	8.509	18	24	RMS	919	137	403	C	10	6	1	25	42	42	4.9
PJ24	91+0.218	8.2 E FAS 279	LEWIS AND CLARK	7 48 70	5.819	24	25	PMS	956	143	132	3	16	8	2	14	43	42	3.3
RJ50	80+0.057	1.9 S FAS 289 291	GALLATIN	10 64 64	1.857	36	36	PMS	2835	479	264	8	25	10	5	3	51	42	.9
PJ48	0+0.294	0.3 S FAI 90	BIG HORN	11 34 59	.893	24	24	RMS	3505	455	064	0	8	4	20	20	52	42	.4
PJ42	73+0.246	JCT FAS RTE 247	VALLEY	3 34 58	2.174	22	26	RMS	1302	208	367	0	13	9	2	21	45	42	1.2
PJ37	46+0.552	4.2 E LAME DEER	ROSEBUD	12 54 54	7.110	24	24	PMS	943	127	120	3	16	8	2	14	43	42	4.1
PJ08	11+0.267	AVON	POWELL	8 33 58	11.942	22	24	RMS	1401	182	573	0	9	8	3	25	45	42	6.6
PJ07	23+0.549	2.9 S FAS 473	RAVALLI	8 36 36	2.932	22	25	RMS	934	121	273	0	11	6	2	23	42	42	1.7
PJ06	99+0.246	3.6 E PERMA	SANDERS	8 24 38	2.956	20	25	RMS	710	105	406	0	9	4	2	26	41	42	1.7
PJ19	57+0.499	HALL FAS 512 & 513	GRANITE	8 25 52	5.079	20	22	RMS	677	98	471	0	9	3	1	27	40	42	3.0
PJ19	24+0.300	3.4 E GRANITE CO	DEER LODGE	9 34 54	3.379	22	24	RMS	1084	157	197	3	14	7	2	18	44	42	1.9
PJ01	49+0.289	13.5 E FAS 482	LINCOLN	1 35 39	6.869	20	24	RMS	1040	135	264	0	14	4	3	22	43	42	3.9
PJ05	5+0.530	5.2 N JCT FAI 90	MISSOULA	8 64 64	9.496	36	36	PMS	3566	520	453	4	15	10	10	13	52	42	4.6
PJ05	57+0.826	1.1 S FAP 52	LAKE	1 58 58	1.188	32	32	PMS	4584	669	454	6	18	10	12	8	54	42	.5
PJ05	41+0.154	5.4 S RONAN	LAKE	1 66 66	5.018	40	40	PMS	3682	537	281	6	21	10	14	1	52	42	2.4
PJ05	61+0.600	0.6 N POLSON	LAKE	1 54 54	2.852	24	32	PMS	1999	269	544	0	12	10	3	23	48	42	1.5
PJ03	322+1.038	FAIRFIELD	TETON	6 21 45	1.492	20	24	BST	765	99	440	0	12	3	0	27	42	43	.9
PJ03	340+0.952	CHOTEAU	TETON	6 21 32	12.944	20	22	BST	750	180	397	0	13	5	1	23	42	43	7.5
PJ05	104+0.255	JCT FAS 208	FLATHEAD	1 49 61	5.341	38	38	RMS	5540	664	383	7	22	10	13	4	56	43	2.4
PJ02	315+0.970	4.3 E BELGRADE	GALLATIN	10 37 37	3.683	24	30	PMS	3462	450	601	4	18	10	2	19	53	43	1.7
PJC1	233+C.191	4.4 E BLACKFOOT	GLACIER	2 25 61	7.073	24	24	RMS	1288	206	805	0	10	7	3	26	46	43	3.8
PJ19	27+0.690	GRANITE CO LINE	GRANITE	8 34 40	3.134	20	24	RMS	704	102	224	C	12	6	0	23	41	43	1.8
PJ07	49+0.732	1.7 N HAMILTON	RAVALLI	8 53 53	2.249	24	32	RMS	3194	415	648	0	11	10	11	20	52	43	1.1
PJ06	72+0.578	3.1 W PLAINS	SANDERS	8 31 34	3.141	18	24	RMS	1211	180	408	0	12	6	4	23	45	43	1.7
RJ45	0+0.536	BIG TIMBER LIMITS	SWEET GRASS	10 34 56	2.201	22	24	RMS	964	125	451	0	10	5	3	26	44	43	1.2
PJ23	2+0.172	JCT FAI RTE 94	CUSTER	12 20 36	3.282	22	25	RMS	1078	140	348	0	11	8	1	24	44	43	1.E
PJ20	32+0.967	1.0 N SAVAGE	RICHLAND	4 34 57	9.055	20	24	RMS	1296	168	377	C	12	8	3	23	46	43	4.9
PJ24	26+0.710	5.2 W FAS 209	MISSOULA	8 49 49	5.188	25	25	BST	1414	233	438	0	8	8	9	22	47	44	2.7
PJ21	44+1.341	3.0 S CONRAD	PONDERA	6 64 64	2.835	24	26	RMS	891	115	264	0	11	8	2	23	44	44	1.6
PJ25	46+0.499	ROOSEVELT CO	ROOSEVELT	3 30 56	.412	20	24	RMS	983	127	220	C	12	10	2	21	45	44	.2
PJ28	64+0.237	4.5 S REO LODGE	CARBON	11 34 57	4.147	22	22	RMS	783	176	591	C	8	8	1	26	43	44	2.4
PJ06	56+C.095	4.8 E THOMP FALLS	SANDERS	8 35 49	1.717	20	24	RMS	1019	151	184	0	13	5	9	18	45	44	.9
PJ06	88+0.718	3.6 E JCT FAS 461	SANDERS	8 24 38	1.869	20	24	RMS	584	87	307	0	11	4	0	26	41	44	1.1
PJ05	159+0.617	STRYKER	LINCOLN	1 31 64	8.683	24	24	RMS	820	106	431	0	13	4	1	26	44	44	4.9
PJ07	13+0.545	0.8 N SULA	RAVALLI	8 36 39	3.392	24	24	BST	846	109	235	0	12	7	2	23	44	44	1.9
PJ06	94+0.088	1.1 W PERMA	SANDERS	8 24 38	1.276	20	24	RMS	597	88	364	0	10	3	2	26	41	44	.8
PJ15	212+C.181	JCT FAR RTE 18	GARFIELD	5 37 47	.268	22	24	RMS	1021	156	263	0	13	8	3	21	45	44	.1
PJ19	48+0.325	MAXVILLE	GRANITE	8 31 52	9.137	20	24	RMS	509	73	683	0	7	3	2	28	40	44	5.5
PJ15	54+0.311	MOCCASIN	JUDITH BASIN	6 58 71	2.337	22	24	RMS	1350	160	302	2	15	7	1	22	47	44	1.2
PJC1	89+0.548	9.2 E FLATHEAD CO	FLATHEAD	1 36 57	9.847	24	25	RMS	1076	139	249	0	13	6	4	22	45	44	5.4
PJ01	71+0.596	8.7 W FLATHEAD CO	LINCOLN	1 37 53	6.645	22	24	RMS	940	122	272	0	15	5	2	23	45	44	3.7
PJ01	247+0.019	7.7 W OF CUT BANK	GLACIER	2 27 61	4.950	24	24	RMS	1376	206	534	0	15	6	2	24	47	44	2.6
PJ01	537+0.631	3.7 W GLASGOW	VALLEY	3 48 48	3.338	24	26	RMS	2156	291	695	C	10	10	7	24	51	44	1.6
PJ01	679+0.899	SHELBY LIMITS	TOOLE	2 28 52	1.040	20	24	RMS	1063	138	266	0	15	7	1	22	45	44	.6
RJC1	379+0.167	JCT FAP RTE 10	HILL	2 52 52	1.516	40	40	RMS	3709	396	654	0	13	10	10	21	54	44	.7
PJ03	358+0.625	4.6 N BYNUM	TETON	6 32 32	8.589	20	24	BST	488	117	246	0	10	6	1	23	40	44	5.2
PJ03	416+0.397	3.5 W BROWNING	GLACIER	2 35 51	6.368	22	24	RMS	781	152	452	0	10	8	1	25	44	45	3.6
PJ01	80+0.387	FLATHEAD CO LINE	FLATHEAD	1 52 52	9.172	28	28	RMS	1047	136	212	0	14	7	5	20	46	45	5.0
PJC1	210+0.124	0.9 E SPUR RTE 1	GLACIER	2 43 62	1.211	26	30	RMS	1160	221	353	0	16	9	1	21	47	45	.6
PJ15	41+0.824	5.2 E FAS 230	JUDITH BASIN	6 36 36	12.442	20	24	RMS	1294	153	364	0	13	6	5	24	48	45	6.5

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYR	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FND	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ15	36+0.650	JCT FAS RTE 230	JUDITH BASIN	6	37	37	5.169	24	30	RMS	1503	178	286	0	11	9	8	21	49	45	2.6
PJ16	170+0.113	15.0 N ROUNDUP	MUSSELSHELL	11	35	35	5.780	20	24	BST	638	82	425	0	9	5	2	27	43	45	3.3
PJ35	32+0.154	6.3 E GRANITE CO	GRANITE	8	23	23	6.475	11	11	GRV	86	13	113	0	0	3	0	28	31	45	4.5
PJ28	70+0.311	RED LODGE	CARBON	11	21	54	11.712	22	24	RMS	1202	240	544	0	11	8	5	23	47	45	6.2
PJ25	46+0.911	JCT FAP RTE 32	ROOSEVELT	3	20	56	5.474	24	24	RMS	1015	131	371	0	12	7	2	25	46	45	3.0
PJ24	116+0.833	CASCADE CO	CASCADE	6	52	52	10.632	24	26	RMS	1076	161	308	0	15	7	2	22	46	45	5.7
PJ52	23+0.600	4.7 S FLATHEAD CO	LAKE	1	26	60	2.661	24	28	RMS	1676	248	431	0	14	6	9	21	50	45	1.3
PJ53	32+0.044	BROADVIEW	YELLOWSTONE	11	48	48	2.172	20	24	RMS	885	115	220	0	15	7	1	22	45	45	1.2
PJ45	2+0.759	JCT FAS RTE 479	SWEET GRASS	10	35	55	4.588	20	24	RMS	518	67	422	0	9	4	1	28	42	46	2.7
PJ45	45+0.329	JCT. FAP RTE 14	WHEATLAND	10	49	54	3.758	24	24	PMS	963	125	492	0	10	9	2	26	47	46	2.0
PJ24	86+0.129	3.1 E FAS 279	LEWIS AND CLARK	7	57	64	5.094	28	30	PMS	956	143	104	7	20	10	1	9	47	46	2.7
PJ35	14+0.578	11.2 W GRANITE CO	RAVALLI	8	24	24	11.240	11	11	GRV	76	12	113	0	0	3	0	28	31	46	7.8
PJ25	0+0.055	CIRCLE	MCCONE	4	36	56	7.600	20	24	RMS	585	76	315	0	8	8	1	26	43	46	4.3
PJ25	7+0.759	7.6 N CIRCLE	MCCONE	4	36	55	13.141	20	25	RMS	567	73	168	0	13	6	1	23	43	46	7.5
PJ15	88+0.246	5.1 E LEWISTOWN	FERGUS	5	37	56	6.022	24	30	RMS	1009	131	333	0	14	8	1	24	47	46	3.2
PJ15	94+0.354	11.1 E LEWISTOWN	FERGUS	5	40	52	8.960	24	30	RMS	841	109	604	0	9	9	1	27	46	46	4.8
PJ15	33+0.205	11.3 E GEYSER	JUDITH BASIN	6	37	37	3.438	24	30	RMS	1315	156	522	0	11	9	3	26	49	46	1.8
PJ06	85+0.066	JCT FAS 461	SANDERS	8	31	51	3.604	20	24	RMS	578	86	391	0	11	4	1	27	43	46	2.1
PJ07	0+0.000	IDAHO LINE	RAVALLI	8	40	40	.105	22	22	BST	671	87	329	0	13	5	0	26	44	46	.1
PJ07	16+0.756	4.2 N SULA	RAVALLI	8	37	39	3.539	24	24	BST	862	112	235	0	13	7	3	23	46	46	1.9
PJ13	56+0.524	MCALLISTER	MADISON	9	36	57	5.182	22	24	RMS	689	106	258	0	12	7	1	24	44	46	2.9
PJ01	64+0.847	15.5 W FLATHEAD CO	LINCOLN	1	41	43	6.753	20	24	RMS	862	112	288	0	13	7	2	24	46	46	3.6
PJ01	103+0.175	3.8 E MARION	FLATHEAD	1	40	63	3.262	24	24	RMS	1354	176	249	0	14	8	8	19	49	46	1.7
PJ01	44+0.296	8.5 E FAS 482	LINCOLN	1	36	65	5.006	20	24	RMS	1055	137	184	0	13	7	8	19	47	46	2.7
PJ05	98+0.643	5.2 NE FLATHEAD CO	FLATHEAD	1	63	63	5.548	32	32	PMS	2511	338	298	6	22	10	3	13	54	46	2.6
PJ05	34+0.947	2.1 N ST IGNATIUS	LAKE	1	72	72	.388	32	32	RMS	3302	482	399	7	23	10	4	12	56	46	.2
PJ05	32+0.761	ST IGNATIUS	LAKE	1	69	69	.340	44	44	RMS	3093	451	88	5	21	10	20	0	56	47	.1
PJ03	413+0.039	JCT FAP RTE 1	GLACIER	2	35	51	3.371	22	24	RMS	1096	213	854	0	10	8	5	26	49	47	1.7
PJ05	27+0.503	JCT FAP 6	LAKE	1	56	60	2.550	44	44	PMS	2802	409	578	5	18	10	3	19	55	47	1.1
PJ03	422+0.786	9.9 W BROWNING	GLACIER	2	29	35	2.247	20	24	PMS	701	136	556	0	10	8	1	26	45	47	1.2
PJ01	254+0.122	0.6 W OF CUT BANK	GLACIER	2	55	55	.402	42	42	PMS	2220	266	335	5	17	10	4	18	54	47	.2
PJ10	55+0.129	2.8 N LOMA	CHOUTEAU	6	34	55	8.766	22	24	RMS	1043	135	435	0	12	8	3	25	48	47	4.6
PJ07	51+0.984	JCT FAS 373	RAVALLI	8	53	53	7.046	24	32	RMS	2613	339	648	3	13	10	7	22	55	47	3.2
PJ07	0+0.105	JCT FAP 46	RAVALLI	8	40	40	7.430	22	22	BST	695	90	329	0	13	5	1	26	45	47	4.1
PJ14	137+0.000	6.5 E RYEGATE	GOLDEN VALLEY	11	37	55	9.103	21	24	RMS	874	113	312	0	11	8	3	25	47	47	4.8
PJ33	1+0.219	0.6 N LIBBY	LINCOLN	1	42	50	8.320	28	28	BST	1572	204	349	3	16	8	3	21	51	47	4.1
RJ28	82+0.066	ROBERTS	CARBON	11	36	36	8.931	21	24	RMS	1165	233	486	0	13	8	5	23	49	47	4.6
PJ29	34+0.188	SHERIDAN	MADISON	9	39	39	8.029	20	24	RMS	1010	212	486	0	11	8	6	23	48	47	4.2
PJ24	138+0.485	SUN RIVER	CASCADE	6	36	71	1.321	25	31	RMS	1713	239	453	3	16	9	2	22	52	47	.6
PJ24	109+0.052	JCT FAP RTE 9	LEWIS AND CLARK	7	52	52	7.789	24	26	RMS	1005	150	308	0	15	8	2	23	48	47	4.1
PJ23	5+0.439	3.3 S FAI RTE 94	CUSTER	12	36	36	9.137	22	25	RMS	705	102	425	0	10	7	2	26	45	47	5.0
PJ22	90+0.037	0.5 S CULBERTSON	ROOSEVELT	3	33	58	1.859	20	24	RMS	583	87	311	0	9	7	2	26	44	47	1.0
PJ37	0+0.000	JCT FAI RTE 90	BIG HORN	11	54	54	7.865	24	24	PMS	810	109	217	0	11	8	5	22	46	47	4.2
PJ42	59+0.181	2.9 N VALLEY CO	VALLEY	3	34	34	11.343	22	26	RMS	635	101	324	0	12	7	1	25	45	47	6.2
PJ43	1+0.761	1.1 N LEWISTOWN	FERGUS	5	50	50	7.722	24	28	RMS	1224	159	318	0	14	10	2	23	49	47	3.9
PJ45	8+0.030	5.3 N FAS 479	SWEET GRASS	10	42	42	7.745	20	24	RMS	453	58	448	0	9	4	1	28	42	47	4.5
PJ53	34+0.273	GOLDEN VALLEY CO	GOLDEN VALLEY	11	48	48	6.295	24	28	BST	927	120	289	0	14	8	1	24	47	47	3.3
PJ50	47+0.941	JCT SPUR RTE 50	GALLATIN	10	55	55	12.950	28	28	PMS	1459	229	283	5	19	9	1	18	52	48	6.2
PJ53	18+0.839	JCT FAS RTE 328	YELLOWSTONE	11	48	48	12.745	20	24	RMS	939	122	354	0	11	9	3	25	48	48	6.6
PJ42	70+0.530	2.7 S FAS 247	VALLEY	3	34	34	2.725	22	26	RMS	826	132	442	0	11	9	2	26	48	48	1.4
PJ22	43+0.383	JCT FAP 30	SHERIDAN	3	33	36	9.226	20	24	RMS	953	142	352	0	14	9	2	24	49	48	4.7
PJ22	108+0.288	4.6 N FAS 201	RICHLAND	4	40	49	4.649	24	28	RMS	685	102	448	0	8	8	3	27	46	48	2.5
PJ23	44+0.152	6.4 N POWDER R CO	CUSTER	12	32	60	3.713	18	24	RMS	368	53	316	0	9	4	2	27	42	48	2.2
PJ35	25+0.875	GRANITE CO LINE	GRANITE	8	23	23	6.280	11	11	GRV	72	11	113	0	0	3	0	29	32	48	4.3
PJ07	20+0.475	7.7 N SULA	RAVALLI	8	37	39	3.081	24	24	BST	885	115	220	0	12	7	7	22	48	48	1.6

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	YEARS IM	SECTION LENGTH	WIDTH SRF	WIDTH RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SPF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ07	82+0.746	LOLO	MISSOULA	8	68	68	.492	44	44	PMS	4891	635	206	10	30	10	10	0	60	48	.2
PJ10	63+0.939	11.6 N LOMA	CHOUTEAU	6	34	51	8.465	22	24	PMS	932	121	672	0	10	8	3	27	48	48	4.4
PJ10	86+0.041	3.4 S HILL CO	CHOUTEAU	6	33	41	3.370	20	24	BST	1119	145	476	0	12	7	6	25	50	49	1.7
PJ01	56+0.167	20.4 E FAS 482	LINCOLN	1	38	50	8.685	20	26	RMS	1004	130	312	0	11	6	8	24	49	48	4.4
PJ01	113+0.334	6.0 W KALISPELL	FLATHEAD	1	49	51	6.278	24	31	RMS	2018	262	452	3	14	8	8	21	54	48	2.9
PJ01	435+0.143	5.8 E FAS 376	BLAINE	2	25	71	4.686	22	24	RMS	1033	134	324	3	17	4	1	24	49	48	2.4
PJ03	374+0.208	DUPUYER	PONDERA	6	32	51	8.382	20	24	RMS	396	95	336	0	11	4	1	26	42	48	4.9
PJ03	367+0.264	PONDERA CO	PONDERA	6	32	51	6.905	20	24	RMS	466	112	391	0	12	4	1	26	43	48	3.9
PJ03	353+0.948	BYNUM	TETON	6	32	32	4.648	20	24	BST	494	119	364	0	11	6	2	25	44	48	2.6
PJ02	311+0.654	BELGRADE	GALLATIN	10	22	58	4.314	24	24	RMS	2195	285	514	4	17	8	4	22	55	48	1.9
PJ02	680+0.897	PLEVNA	FALLON	12	39	39	11.725	24	30	RMS	732	95	259	0	11	10	2	24	47	48	6.2
PJ02	707+0.000	SUPERIOR	MINERAL	8	31	52	.064	22	24	PMS	235	30	716	0	6	5	0	29	40	49	
PJ05	61+0.013	POLSON	LAKE	1	66	66	.587	40	40	PMS	2712	366	289	9	26	10	1	11	57	49	.3
PJ03	300+0.866	1.4 W VAUGHN	CASCADE	6	36	36	6.230	25	31	RMS	2957	384	631	3	15	8	11	21	58	49	2.6
PJ05	93+0.536	FLATHEAD CO	FLATHEAD	1	64	64	5.181	32	32	PMS	1926	260	243	4	18	10	9	14	55	49	2.3
PJ06	57+0.808	6.5 E THOMP FALLS	SANDERS	8	34	49	6.899	20	24	RMS	848	126	233	0	13	5	9	22	49	49	3.5
PJ26	0+0.000	JCT FAP RTE 20	RICHLAND	4	36	36	.771	22	25	BST	977	127	448	0	13	10	1	26	50	49	.4
PJ36	3+0.657	3.7 N FAP 6	SANDERS	8	41	47	3.802	20	25	BST	450	67	206	0	10	6	3	25	44	49	2.1
PJ36	0+0.000	JCT FAP RTE 6	SANDERS	8	44	47	3.661	20	26	BST	528	79	283	0	9	7	3	26	45	49	2.0
PJ24	31+0.869	JCT FAS RTE 209	MISSOULA	8	54	54	3.799	24	30	RMS	1137	187	499	0	10	10	7	24	51	49	1.9
PJ45	58+0.568	13.3 N HARLOWTON	WHEATLAND	10	49	54	4.288	24	24	PMS	826	107	538	0	16	16	2	27	49	49	2.2
PJ52	10+0.345	10.3 N FAP 5	LAKE	1	48	65	7.657	24	25	RMS	1282	189	468	0	14	8	7	24	53	50	3.6
PJ25	28+0.107	4.2 N FAS 254	MCCONE	4	40	40	7.404	20	24	RMS	582	75	357	0	10	7	3	27	47	50	3.9
PJ23	83+0.090	JCT FAP RTE 54	POWDER RIVER	12	31	56	2.448	20	24	RMS	552	80	203	0	13	7	3	24	47	50	1.3
PJ24	100+0.526	JCT FAS RTE 434	LEWIS AND CLARK	7	51	51	8.522	25	25	BST	993	148	217	0	13	8	10	20	51	50	4.2
PJ29	19+0.904	5.3 N VIRGINIA CTY	MADISON	9	42	42	5.254	20	24	RMS	772	162	390	0	13	8	4	24	49	50	2.7
PJ26	0+0.771	0.8 E JCT FAP 20	RICHLAND	4	33	55	6.762	20	24	RMS	361	46	480	0	8	5	2	29	44	50	3.8
PJ09	38+0.547	AUGUSTA FAS 434	LEWIS AND CLARK	7	35	36	1.336	22	24	RMS	807	129	812	0	13	7	1	28	49	50	.7
PJ10	72+0.462	6.9 S BIG SANDY	CHOUTEAU	6	34	51	6.871	22	24	RMS	990	128	390	0	12	8	6	25	51	50	3.4
PJ10	97+0.042	7.6 N HILL CO	HILL	2	28	53	7.369	22	24	RMS	1211	157	510	0	12	7	8	25	52	50	3.5
PJ15	103+0.270	20.2 E LEWISTOWN	FERGUS	5	40	54	9.667	24	32	RMS	758	115	825	0	9	9	3	28	49	50	4.9
PJ16	309+0.524	JCT FAS RTE 363	PHILLIPS	3	38	42	1.399	24	26	RMS	979	164	416	0	14	8	5	24	51	50	.7
PJ05	114+0.864	KALISPELL	FLATHEAD	1	57	60	5.800	36	36	PMS	3549	425	309	6	24	10	11	9	60	50	2.3
PJ04	50+0.813	YELLOWSTONE CO	YELLOWSTONE	11	49	65	1.390	28	32	PMS	4336	563	616	4	18	9	14	16	61	50	.5
PJ03	258+0.974	JCT I 15 CASCADE S	CASCADE	6	33	53	.173	24	28	RMS	493	149	368	0	12	10	0	24	46	50	.1
PJ03	292+0.026	0.1 W FAI 15	CASCADE	6	38	49	7.270	24	30	RMS	1023	127	554	6	13	8	3	27	51	50	3.6
PJ05	18+0.483	3.4 N LAKE CO	LAKE	1	55	60	5.861	32	32	PMS	3401	496	536	6	19	10	9	16	60	50	2.3
PJ01	629+0.422	3.2 E BROCKTON	ROOSEVELT	3	46	50	5.368	24	32	RMS	674	87	268	0	12	9	2	25	48	50	2.8
PJ01	678+0.975	KIOWA JCT	GLACIER	2	29	72	.208	20	20	PMS	306	61	377	0	10	4	1	28	43	51	.1
PJ01	278+0.459	JCT FAI 15	TOOLE	2	60	60	.350	68	68	PMS	3579	501	3400	3	13	10	7	28	61	51	.1
PJ01	2+0.637	2.6 E IDAHO LINE	LINCOLN	1	49	51	4.352	22	28	PMS	1026	133	338	4	14	8	2	24	52	51	2.1
PJ04	42+0.924	0.2 N FAP 28	CARBON	11	49	65	7.960	24	32	RMS	3814	495	580	5	16	10	11	17	61	51	3.1
PJ05	59+0.004	JCT FAP 52	LAKE	1	58	58	.331	40	40	PMS	6163	899	326	9	25	10	20	0	64	51	.1
PJ04	55+0.309	LAUREL	YELLOWSTONE	11	23	68	2.084	55	55	RMS	2866	372	872	5	18	8	4	24	59	51	.9
PJ03	317+0.076	2.1 S TETON CO	CASCADE	6	21	32	2.110	20	22	BST	952	123	397	0	12	4	11	25	52	51	1.0
PJ02	616+0.886	0.7 E JCT FAI 94	CUSTER	12	50	50	6.226	20	24	RMS	668	86	210	0	15	9	1	24	49	51	3.2
PJ14	77+0.214	WHEATLAND CO	WHEATLAND	10	34	34	10.825	20	24	BST	424	55	642	0	9	7	1	29	46	51	5.8
PJ13	94+0.645	1.1 E GALLATIN CO	GALLATIN	10	38	38	1.106	24	28	PMS	719	93	399	0	13	8	2	27	50	51	.6
PJ06	49+0.684	0.8 THOMPSON FALLS	SANDERS	8	48	54	.787	24	28	PMS	1246	181	271	5	15	9	5	20	54	51	.4
PJ06	64+0.701	13.4 E THOMP FALLS	SANDERS	8	39	39	3.997	26	26	BST	861	128	374	2	16	6	2	25	51	51	2.0
PJ36	7+0.436	7.5 N FAP 6	SANDERS	8	34	47	6.403	20	24	BST	403	60	288	0	10	6	2	27	45	51	3.5
PJ32	48+0.193	2.6 S SCOBEY	DANIELS	3	33	35	2.587	20	24	BST	445	62	203	0	12	8	1	25	46	51	1.4
PJ36	46+0.741	SPUR RTE 36	SANDERS	8	41	41	1.746	20	26	BST	842	126	685	0	9	6	9	27	51	51	.9
PJ27	29+0.146	JCT FAS RTE 322	FALLON	12	48	48	5.510	25	25	BST	575	74	441	0	10	9	2	27	48	51	2.9
PJ29	75+0.032	SILVER BOW CO LINE	SILVER BOW	9	34	62	2.823	24	30	RMS	543	70	302	0	14	7	0	27	48	51	1.5

ITEM	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS PT	IM	SECTION LENGTH	WIDTH SUF	ROY TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS ENG	SAF	GRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ29	1+0.827	VIRGINIA CITY	MADISON	9	45	45	5.116	20	24 RMS	857	179	515	4	18	5	3	21	51	51	2.5
PJ20	20+0.809	20.7 N CIRCLE	MCCONE	4	35	40	7.203	20	24 RMS	586	75	392	0	10	7	4	27	48	51	3.7
PJ26	79+0.735	BROADUS	POWDER RIVER	12	40	40	3.380	24	24 RMS	1040	150	297	0	13	9	8	22	52	51	1.6
PJ24	97+0.041	14.0 E FAS 279	LEWIS AND CLARK	7	48	63	3.505	24	25 RMS	956	143	237	3	16	8	4	21	52	51	1.7
PJ22	35+0.548	17.2 N POWDER R CO	CUSTER	12	31	47	10.796	20	24 BST	383	55	469	0	8	4	5	28	45	51	5.9
PJ02	7+0.586	7.1 E SCOBEY	DANIELS	6	35	36	10.261	20	24 BST	412	61	184	0	12	8	1	25	46	51	5.5
PJ38	0+0.000	JCT FAP RTE 5	FLATHEAD	1	75	75	4.149	44	44 PMS	2268	315	191	10	30	10	3	5	58	51	1.7
PJ36	21+2.345	FERGUS CO	FERGUS	5	46	60	3.255	24	24 RMS	951	125	312	4	14	9	2	24	53	52	1.5
PJ33	15+3.931	ALTON	YELLOWSTONE	11	48	48	2.957	20	24 RMS	1009	121	354	0	13	9	7	24	53	52	1.4
PJ22	42+0.348	PLENTYWOOD	SHERIDAN	3	33	36	1.033	20	24 RMS	1838	275	564	2	14	10	10	25	57	52	.4
PJ24	85+1.672	JCT FAS RTE 271	POWELL	8	61	61	9.806	24	26 PMS	1141	188	184	6	21	10	2	15	54	52	4.5
PJ23	27+0.819	25.6 S FAI RTE 94	CUSTER	12	31	47	5.528	20	24 BST	399	57	492	0	8	7	3	28	46	52	3.0
PJ36	13+0.871	13.9 N FAP 6	SANDERS	8	41	41	2.385	20	26 BST	446	66	138	0	12	6	6	23	47	52	1.3
PJ37	7+0.879	7.9 E JCT FAI 90	BIG HORN	11	54	54	9.342	24	24 PMS	776	104	418	0	10	8	7	26	51	52	4.6
PJ35	39+0.473	13.4 E GRANITE CO	GRANITE	8	36	36	6.135	28	28 GRD	113	18	462	0	0	0	3	29	38	52	3.8
PJ29	68+0.671	6.1 E JEFF CO LINE	JEFFERSON	7	31	62	6.155	22	26 RMS	416	54	296	0	10	7	3	27	47	52	3.3
PJ32	39+0.866	4.7 N DANIELS CO	DANIELS	3	33	35	4.599	20	24 BST	307	42	203	0	11	5	1	27	44	52	2.6
PJ28	77+0.869	2.3 E FAS 375	SILVER BOW	9	28	60	2.337	24	30 RMS	736	95	627	0	14	7	2	28	51	52	1.1
PJ19	67+0.511	11.1 N MCALLISTER	MADISON	9	34	34	7.349	20	24 RMS	997	61	301	0	13	7	1	25	46	52	4.0
PJ18	49+0.247	ENNIS	MADISON	9	34	34	7.247	20	24 RMS	835	129	400	0	15	8	4	25	52	52	3.5
PJ11	75+0.395	CLYDE PARK	PARK	10	36	38	5.039	20	24 RMS	567	85	608	0	9	8	4	28	49	52	2.6
PJ14	142+0.021	11.9 E ROUNDUP	MUSSELSHELL	11	39	65	5.562	21	24 RMS	432	56	210	0	12	8	1	26	47	52	3.0
PJ14	146+0.071	JCT FAP RTE 53	GOLDEN VALLEY	11	37	37	5.631	20	26 RMS	250	32	393	0	9	4	1	29	43	52	3.2
PJ34	75+0.152	2.0 W WHEATLAND CO	MEAGHER	10	34	64	2.049	22	24 RMS	428	55	748	0	10	6	2	29	47	52	1.1
PJ20	575+2.732	0.6 W FAS 447	ROSEBUD	12	31	47	.571	20	26 RMS	207	26	291	0	8	5	0	29	42	52	.3
PJ02	578+0.211	JCT FAS 446	ROSEBUD	12	31	47	1.731	20	26 RMS	264	34	335	0	9	5	1	28	43	52	1.0
PJ34	63+1.841	3.0 N YELLOWST CO	YELLOWSTONE	11	64	64	.432	68	68 PMS	6068	788	1424	7	22	10	4	22	65	52	.2
PJ04	42+0.765	JCT FAP 28	CARBON	11	68	68	.159	40	40 PMS	3777	491	432	9	27	10	3	13	62	52	.1
PJ09	56+0.943	2.0 S FAP 52	LAKE	1	73	73	.882	40	40 PMS	4495	656	308	8	25	10	20	0	63	52	.3
PJ08	30+0.048	2.5 N JCT FAP 5	LAKE	1	56	60	2.564	32	32 PMS	2611	381	503	4	17	10	10	19	60	52	1.0
PJ01	6+0.982	3.2 E FAS 508	LINCOLN	1	49	51	6.955	22	28 PMS	1349	175	508	2	14	8	6	25	55	52	3.1
PJ01	526+0.524	14.1 W GLASGOW	VALLEY	3	50	55	11.121	24	27 PMS	1070	144	277	3	16	10	2	22	53	52	5.2
PJ01	636+0.151	BROCKTON	ROOSEVELT	3	43	57	3.242	24	30 RMS	761	98	367	0	13	10	3	26	52	53	1.6
PJ01	99+0.410	MARION	FLATHEAD	1	47	61	3.779	24	30 RMS	1286	167	292	0	15	7	13	21	56	53	1.7
PJ03	307+0.155	JCT FAP 24	CASCADE	6	56	61	7.139	24	31 RMS	1009	131	469	0	15	8	5	26	54	53	3.3
PJ02	577+0.293	JCT FAS 447	ROSEBUD	12	31	47	.926	20	26 PMS	283	36	218	0	11	5	1	28	45	53	.5
PJ02	419+0.341	1.5 W COLUMBUS	STILLWATER	11	31	56	1.535	22	30 RMS	484	62	427	0	13	7	1	28	49	53	.8
PJ14	151+0.679	MUSSELSHELL CO	MUSSELSHELL	11	37	37	3.424	20	26 RMS	221	30	393	0	9	4	1	29	43	53	2.0
PJ14	68+0.503	23.4 E FAP 11	MEAGHER	10	36	52	4.875	22	24 RMS	361	49	280	0	12	7	1	27	47	53	2.6
PJ15	171+0.262	6.1 W SAND SPRINGS	GARFIELD	5	47	58	8.146	24	24 PMS	280	42	438	0	8	7	1	29	45	53	4.5
PJ15	148+0.698	9.6 W GARFIELD CO	PETROLEUM	5	51	51	7.963	24	24 BST	350	53	479	0	9	8	1	28	46	53	4.3
PJ16	155+0.020	ROUNDUP	MUSSELSHELL	11	50	54	5.953	24	30 PMS	1074	139	340	0	13	10	7	24	54	53	2.7
PJ13	47+0.144	9.2 N CAMERON	MADISON	9	56	58	1.492	22	25 PMS	1165	233	601	0	12	9	10	24	55	53	.7
PJ11	117+0.536	JCT FAP RTE 14	MEAGHER	10	33	36	8.182	20	24 RMS	645	96	421	0	12	8	4	27	51	53	4.0
PJ11	200+0.003	JCT FAP RTE 15	CASCADE	6	55	55	3.606	40	40 RMS	1747	227	380	3	17	10	7	21	58	53	1.5
PJ29	59+0.892	JEFFERSON CO LINE	JEFFERSON	7	36	36	5.791	18	24 RMS	302	45	502	0	10	5	1	29	45	53	3.2
PJ37	24+0.492	BUSBY	BIG HORN	11	54	54	2.713	24	24 PMS	948	127	593	0	10	10	7	27	54	53	1.2
PJ29	58+0.396	SILVER BOW CO LINE	SILVER BOW	9	36	63	1.486	22	24 RMS	301	45	540	0	10	5	1	29	45	53	.8
PJ22	29+0.335	ARCHER FAS 374	SHERIDAN	3	37	37	11.850	20	24 RMS	606	90	406	0	11	9	3	27	50	53	5.9
PJ22	91+0.986	RICHLAND CO	RICHLAND	4	34	36	1.650	20	24 BST	551	82	515	0	8	10	4	28	50	53	.8
PJ22	112+0.961	JCT FAS 201	RICHLAND	4	40	49	4.749	24	26 PMS	820	123	277	2	17	8	3	23	53	53	2.2
PJ50	60+0.869	14.7 S FAS RTE 345	GALLATIN	10	67	67	9.312	28	28 PMS	1748	274	203	9	28	10	1	10	58	53	3.9
PJ45	69+0.837	JUDITH BASIN CO	JUDITH BASIN	6	47	62	.581	24	24 RMS	887	115	414	3	13	10	1	26	53	53	.3
PJ48	1+0.344	0.8 N HARDIN	BIG HORN	11	41	41	5.460	20	24 RMS	1023	143	345	0	14	8	8	24	54	53	2.5
PJ24	142+0.160	2.6 W FAP 24	CASCADE	6	34	37	2.965	20	24 BST	308	44	422	0	12	4	2	28	46	54	1.6

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BY IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	ADT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ23	85+0.568	2.4 S JCT FAP 54	POWDER RIVER	12	53 53	10.019	24	28	RMS	550	79	266	0	12	10	3	26	51	54	4.9
PJ25	35+0.506	11.0S ROOSEVELT CO	MCCONE	4	37 37	9.233	20	25	RMS	612	79	185	0	18	6	3	24	51	54	4.5
PJ32	7+0.507	3.8 N FAP 1	ROOSEVELT	3	33 36	6.626	26	24	BST	409	57	257	0	10	9	1	28	48	54	3.4
PJ33	64+0.921	2.0 E FA 5	LINCOLN	1	40 40	1.975	20	24	RMS	674	87	448	0	9	8	8	27	52	54	.9
PJ36	31+0.649	FLATHEAD CO	FLATHEAD	1	40 51	4.443	20	26	RMS	461	69	278	0	13	6	4	26	49	54	2.3
PJ13	37+0.869	CAMERON	MADISON	9	34 34	9.243	20	24	RMS	623	124	486	0	12	8	5	26	51	54	4.5
PJ14	13+0.545	11.2 E FAS 284	BROADWATER	7	51 51	9.901	20	26	RMS	385	57	134	2	16	5	1	24	48	54	5.1
PJ12	0+0.000	IDAHO LINE	GALLATIN	10	61 61	2.272	34	34	PMS	1234	285	354	5	17	10	6	18	56	54	1.0
PJ13	89+0.763	BROADWATER CO LINE	BROADWATER	7	32 61	4.247	20	24	RMS	328	42	396	0	10	7	2	28	47	54	2.3
PJ09	43+0.145	TETON CO	TETON	6	35 35	2.846	20	24	RMS	450	72	270	0	14	8	1	26	49	54	1.5
PJ09	29+0.380	9.3 N FAP 24	LEWIS AND CLARK	7	32 36	9.091	20	24	BST	322	51	240	0	12	7	1	27	47	54	4.8
PJ07	7+0.530	7.4 N JCT FAP 46	RAVALLI	8	40 40	6.016	24	24	BST	751	97	289	0	12	6	10	25	53	54	2.8
PJ09	20+0.875	0.8 N FAP 24	LEWIS AND CLARK	7	32 36	8.470	20	24	BST	304	48	535	0	8	7	2	29	46	54	4.6
PJ09	53+0.840	7.8 N FAS 408	TETON	6	36 36	6.133	22	25	RMS	435	69	286	0	14	8	1	26	49	54	3.1
PJ16	192+0.688	6.5 S FAP 15	FERGUS	5	41 65	4.893	24	30	RMS	619	80	367	0	13	9	2	27	51	54	2.4
PJ15	131+0.060	7.8 E PETROLEUM CO	PETROLEUM	5	31 58	4.553	20	24	RMS	263	40	374	0	9	7	1	28	45	54	2.5
PJ15	21+0.888	GEYSER	JUDITH BASIN	6	36 50	4.693	22	25	RMS	1234	146	431	0	12	7	12	25	56	54	2.1
PJ14	187+0.619	17.5 E ROUNDUP	MUSSELSHELL	11	39 39	4.478	20	24	RMS	418	54	354	0	11	8	2	28	49	54	2.3
PJ02	189+0.034	DEER LODGE	POWELL	8	48 48	1.062	24	32	RMS	1874	243	896	3	13	10	7	26	59	54	.4
PJ01	667+0.149	JCT FAP 1 W GLAC	FLATHEAD	1	38 38	.304	40	40	RMS	1567	316	614	7	16	7	6	22	58	54	.1
PJ01	429+0.077	0.6 E FAS 376	BLAINE	2	36 62	5.241	28	30	RMS	1059	137	453	5	14	10	2	25	56	55	2.3
PJ02	302+0.201	MANHATTAN	GALLATIN	10	22 56	5.494	24	28	RMS	544	70	520	0	14	8	2	28	52	55	2.6
PJ02	291+0.572	0.7 E FAI 90	GALLATIN	10	23 52	2.948	22	26	RMS	459	59	493	0	13	8	1	28	50	55	1.5
PJ01	413+0.431	0.4 E ZURICH	BLAINE	2	49 56	.591	32	32	PMS	1614	209	629	5	18	10	1	25	59	55	.2
PJ02	705+0.694	1.0 W SUPERIOR	MINERAL	8	31 52	1.036	22	24	RMS	210	27	544	0	6	5	5	29	45	55	.6
PJ05	120+0.677	5.8 N KALISPELL	FLATHEAD	1	60 60	4.785	36	36	PMS	3681	441	662	4	19	10	12	20	65	55	1.7
PJ05	64+0.489	3.5 N POLSON	LAKE	1	54 54	2.938	24	32	PMS	1718	231	365	5	17	10	7	21	60	55	1.2
PJ05	47+0.372	RONAN	LAKE	1	70 70	6.021	40	40	PMS	3655	533	309	10	28	10	13	4	65	55	2.1
PJ14	160+0.456	7.1 W FAP RTE 16	MUSSELSHELL	11	36 50	7.063	21	25	RMS	416	54	608	0	10	6	5	29	50	55	3.5
PJ15	267+0.492	JCT FAS RTE 253	MCCONE	4	41 56	10.951	24	25	RMS	470	71	312	0	11	10	2	27	50	55	5.5
PJ15	56+0.674	2.3 E MOCCASIN	JUDITH BASIN	6	55 55	1.138	24	32	RMS	1310	155	503	4	14	10	5	25	58	55	.5
PJ15	206+0.822	5.3 W FA RTE 18	GARFIELD	5	36 57	5.344	22	26	RMS	335	51	240	0	13	7	1	27	48	55	2.8
PJ18	48+0.498	10.4 N GARFIELD CO	GARFIELD	5	31 53	10.476	20	24	RMS	183	23	470	0	8	5	2	29	44	55	5.9
PJ18	23+0.937	3.9 N ROSEBUD CO	ROSEBUD	12	31 35	10.946	20	24	BST	218	28	448	0	8	7	1	29	45	55	6.0
PJ18	38+0.093	GARFIELD CO	GARFIELD	5	31 53	10.392	20	24	RMS	180	23	448	0	7	7	1	29	44	55	5.8
PJ15	369+0.000	0.3 W GLENDIVE	DAWSON	4	48 50	.222	24	34	PMS	3575	429	336	6	19	8	20	11	64	55	.1
PJ11	64+0.559	4.1 N FAI 90	PARK	10	41 41	10.238	20	24	RMS	815	122	431	0	14	9	5	26	54	55	4.7
PJ14	6+0.411	4.0 E FAS 284	BROADWATER	7	37 52	7.187	20	25	RMS	382	57	387	0	12	7	2	28	49	55	3.7
PJ13	61+0.592	5.2 N MCALLISTER	MADISON	9	34 34	5.907	20	24	RMS	502	77	205	3	15	8	1	24	51	55	2.9
PJ37	17+0.211	17.2 E JCT FAI 90	BIG HORN	11	54 54	7.257	24	24	PMS	806	108	196	0	12	8	12	22	54	55	3.4
PJ29	25+0.175	1.9 N FAS RTE 357	MADISON	9	40 40	7.930	20	24	RMS	711	149	435	0	12	8	8	25	53	55	3.7
PJ36	26+0.128	7.2 N SPUR FAP 36	SANDERS	8	40 40	4.999	20	25	BST	457	68	266	0	11	7	6	26	50	55	2.5
PJ35	0+0.000	FAP RTE 7	RAVALLI	8	41 55	5.576	20	24	RMS	349	48	463	0	10	6	4	28	48	55	2.9
PJ32	3+0.751	JCT FAP RTE 1	ROOSEVELT	3	33 36	3.750	20	24	BST	528	73	372	0	12	9	3	27	51	55	1.8
PJ30	0+0.000	JCT FAP RTE 22	SHERIDAN	3	38 40	10.149	20	24	RMS	412	57	290	0	12	7	3	27	49	55	5.2
PJ24	139+0.705	JCT FAP RTE 24	CASCADE	6	34 67	2.628	24	24	RMS	366	53	429	0	15	4	2	28	49	55	1.3
PJ23	55+0.758	COALWOOD	POWDER RIVER	12	49 55	8.797	24	24	RMS	339	49	217	0	11	9	1	27	48	55	4.6
PJ46	65+0.263	0.4 E WISE RIVER	BEAVERHEAD	9	61 61	8.231	26	28	PMS	489	73	311	3	15	6	1	26	51	55	4.0
PJ49	0+0.579	DILLON	BEAVERHEAD	9	36 62	2.422	26	26	RMS	1088	141	526	0	17	7	8	26	58	56	1.0
PJ45	63+0.463	JUDITH GAP	WHEATLAND	10	49 54	.733	24	24	PMS	878	114	289	5	16	10	1	24	56	56	.3
PJ49	6+0.804	6.8 E FAI RTE 15	BEAVERHEAD	9	59 59	6.880	24	24	PMS	919	119	220	2	17	10	5	22	56	56	3.0
PJ45	15+0.771	13.0 N FAS 479	SWEET GRASS	10	48 48	7.042	24	31	BST	346	44	414	0	11	9	1	28	49	56	3.6
PJ27	22+0.502	JCT FAS RTE 494	FALLON	12	48 48	6.612	25	25	BST	389	50	266	0	12	9	2	27	50	56	3.3
PJ32	28+0.175	7.0 S DANIELS CO	ROOSEVELT	3	33 35	7.041	20	24	BST	270	37	357	0	10	7	2	28	47	56	3.7
PJ14	63+0.148	18.1 E FAP 11	MEAGHER	10	37 48	5.033	20	25	RMS	362	47	290	0	12	8	2	28	50	56	2.7

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	RT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ06	106+0.153	2.0 W DIXON	SANDERS	8	44	44	1.991	24	24	BST	804	119	538	0	10	8	10	27	55	56	.9
PJ09	39+0.850	JCT SPUR FAP 24	LEWIS AND CLARK	7	35	36	3.248	22	24	RMS	468	74	360	0	14	8	2	27	51	56	1.6
PJ07	76+0.872	MISSOULA CO	MISSOULA	8	74	75	6.047	38	38	PMS	4178	543	344	10	30	10	10	6	66	56	2.1
PJ15	73+0.550	8.5 E FAP 45	FERGUS	5	47	54	3.349	24	31	PMS	1568	186	384	6	19	9	3	23	60	56	1.3
PJ15	213+0.088	JORDAN	GARFIELD	5	37	52	4.996	24	26	RMS	401	61	500	0	12	8	2	28	50	56	2.5
PJ14	170+0.161	ROUNDUP	MUSSELSHELL	11	39	39	11.871	20	24	RMS	580	75	333	0	14	10	2	27	53	56	5.6
PJ15	123+0.198	PETROLEUM CO	PETROLEUM	5	31	58	7.790	20	24	RMS	268	41	561	0	10	4	4	29	47	56	4.1
PJ15	226+0.736	8.7 E FAS 341	GARFIELD	5	37	54	12.201	24	24	RMS	326	49	243	0	13	8	1	27	49	56	6.2
PJ03	452+0.819	BABB	GLACIER	2	56	56	3.787	24	28	RMS	971	189	523	3	17	9	3	25	57	56	1.6
PJ01	204+0.366	6.4 E GLACIER CO	GLACIER	2	63	63	4.884	32	32	PMS	997	190	441	4	15	10	4	24	57	56	2.1
PJ01	197+0.816	GLACIER CO LINE	GLACIER	2	52	70	6.390	26	26	PMS	866	165	264	5	19	10	2	21	57	57	2.7
PJ02	294+0.899	3.6 E FAI 90	GALLATIN	10	31	31	4.747	22	28	RMS	327	42	489	0	12	8	1	29	50	57	2.4
PJ01	454+0.550	ODDSON	PHILLIPS	3	49	49	3.137	24	26	RMS	1077	140	539	3	14	8	7	26	58	57	1.3
PJ05	53+0.399	6.0 N RONAN	LAKE	1	58	58	3.432	32	32	PMS	4322	631	688	8	23	10	10	16	67	57	1.1
PJ05	125+0.445	JCT FAP 38	FLATHEAD	1	60	60	1.488	36	36	PMS	6276	753	937	6	20	10	15	18	69	57	.5
PJ02	571+0.088	JCT I 94 E FORSYTH	ROSEBUD	12	28	52	.521	20	20	RMS	120	15	384	0	11	3	0	29	43	57	.3
PJ03	242+0.130	CASCADE CO	CASCADE	6	33	33	2.226	24	26	RMS	138	22	527	0	11	3	1	29	44	57	1.2
PJ15	199+0.094	10.5 E EDWARDS	GARFIELD	5	36	49	7.662	24	24	PMS	291	44	275	0	11	9	1	28	49	57	3.9
PJ14	192+0.108	JCT FAS 310	MUSSELSHELL	11	39	39	3.283	20	24	RMS	358	46	357	0	9	8	5	28	50	57	1.6
PJ15	364+0.400	SPUR RTE 15	FERGUS	5	49	61	1.750	24	28	RMS	818	97	469	3	15	8	4	27	57	57	.8
PJ15	218+0.066	JCT FAS RTE 341	GARFIELD	5	36	49	8.693	24	25	BST	334	51	266	0	13	8	2	27	50	57	4.3
PJ09	46+0.003	JCT FAS 408	TETON	6	35	35	7.848	20	24	RMS	384	61	325	0	15	8	1	27	51	57	3.8
PJ11	109+0.499	JCT FAS RTE 294	MEAGHER	10	36	63	8.034	22	24	RMS	342	51	302	0	13	8	2	27	50	57	4.0
PJ23	47+0.867	2.7 N POWDER R CO	CUSTER	12	52	52	2.704	22	28	PMS	359	52	196	0	11	10	3	26	50	57	1.4
PJ22	17+0.900	SHERIDAN CO	SHERIDAN	3	36	36	3.028	22	25	BST	312	46	249	0	12	8	2	27	49	57	1.5
PJ22	117+0.721	4.7 S JCT FAS 201	RICHLAND	4	38	49	3.628	24	26	RMS	943	141	387	2	17	8	6	25	58	57	1.5
PJ27	12+0.063	FALLON CO	FALLON	12	50	50	10.442	22	24	PMS	342	44	243	0	11	10	2	27	50	57	5.2
PJ28	68+0.573	RED LODGE	CARBON	11	34	57	.117	22	24	RMS	1336	300	595	0	10	8	20	22	60	57	
PJ45	33+0.365	5.1 N WHEATLAND CO	WHEATLAND	10	35	39	4.535	20	24	RMS	332	43	431	0	12	7	2	29	50	57	2.2
PJ45	64+0.218	FERGUS CO	FERGUS	5	47	73	3.002	24	24	PMS	879	114	442	3	15	10	3	26	57	57	1.3
PJ45	49+0.083	3.8 N HARLOWTON	WHEATLAND	10	49	54	9.470	24	24	PMS	766	99	469	0	14	10	6	27	57	58	4.1
PJ27	7+0.242	6.9 N EKALAKA	CARTER	12	50	50	4.818	22	24	PMS	304	39	243	0	11	10	1	28	50	58	2.4
PJ24	0+0.975	MILLTOWN	MISSOULA	8	74	74	.870	44	44	PMS	2656	471	442	10	30	10	2	14	66	58	.3
PJ24	65+0.472	LEWIS & CLARK CO	LEWIS AND CLARK	7	60	60	6.788	24	24	PMS	1343	221	328	6	21	10	4	20	61	58	2.6
PJ24	150+0.680	5.6 W L & C CO	LEWIS AND CLARK	7	35	36	9.902	22	24	RMS	287	41	420	0	12	6	3	29	50	58	5.0
PJ24	145+0.109	LEWIS & CLARK CO	LEWIS AND CLARK	7	34	62	5.554	24	24	RMS	271	39	301	0	15	5	1	28	49	58	2.8
PJ23	2+0.111	MILES CITY LIMITS	CUSTER	12	20	36	.061	25	25	RMS	1304	169	303	0	11	8	20	22	61	58	
PJ32	35+0.227	DANIELS CO	DANIELS	3	33	35	4.667	20	24	BST	289	40	185	0	13	8	2	27	50	58	2.3
PJ30	20+0.630	JCT FAS RTE 516	SHERIDAN	3	40	40	2.757	20	24	RMS	339	47	315	0	13	8	2	28	51	58	1.4
PJ29	66+0.000	JCT FORMER FAP 2	JEFFERSON	7	31	40	2.000	24	31	RMS	388	50	248	0	13	10	2	27	52	58	1.0
PJ37	53+0.681	11.3 E LAME DEER	ROSEBUD	12	54	54	8.693	24	24	PMS	894	120	258	5	18	9	3	23	58	58	3.7
PJ11	204+0.514	JCT FAS RTE 331	CASCADE	6	52	55	6.955	24	32	PMS	2384	309	380	6	17	10	14	18	65	58	2.4
PJ15	192+0.200	3.6 E EDWARDS	GARFIELD	5	36	53	6.889	24	24	RMS	287	43	275	0	12	9	1	28	50	58	3.4
PJ15	136+0.507	WINNETT	PETROLEUM	5	31	69	1.123	22	24	PMS	379	57	416	0	11	10	3	28	52	59	.5
PJ15	262+0.332	13.9 E FAP 42	MCCONE	4	47	47	5.189	24	24	BST	343	52	289	0	13	8	3	27	51	58	2.5
PJ15	248+0.632	JCT FAP 42	MCCONE	4	40	54	8.009	24	24	RMS	323	49	243	0	13	9	2	27	51	58	3.9
PJ15	112+0.982	JCT FAP RTE 16	FERGUS	5	51	51	8.723	24	24	BST	347	53	344	0	13	9	1	28	51	58	4.3
PJ20	18+0.596	4.2 S RICHLAND CO	DAWSON	4	54	54	4.170	28	28	RMS	884	114	434	0	14	10	8	26	58	58	1.8
PJ18	20+0.059	ROSEBUD CO	ROSEBUD	12	28	35	3.899	20	24	BST	255	33	627	0	9	8	3	29	49	58	2.0
PJ02	426+0.083	2.4 E KEATING RD	STILLWATER	11	28	57	6.780	22	26	RMS	277	36	462	0	15	5	1	29	50	58	3.4
PJ02	614+0.727	MILES CITY	CUSTER	12	50	50	1.527	20	24	RMS	1577	205	487	3	17	10	8	24	62	58	.6
PJ01	354+0.598	1.0 E GILDFORD	HILL	2	36	59	8.956	26	31	RMS	573	126	489	5	17	10	1	26	59	58	3.7
PJ01	391+0.007	BLAINE CO	BLAINE	2	46	54	2.849	24	31	PMS	2076	269	600	5	18	10	8	23	64	58	1.0
PJ01	166+0.253	12.7 E WEST GLAC	FLATHEAD	1	49	59	2.834	26	26	PMS	892	170	384	5	19	10	1	23	58	58	1.2
PJ01	383+0.799	HAVRE	HILL	2	46	54	7.206	24	30	PMS	2255	293	655	7	21	10	4	23	65	59	2.5

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	WIDTH ROY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	DRN	SAF	CAP	TCT	ADJ	DEFIC MILES
PJ01	209+0.252	JCT SPUR RTE 1	GLACIER	2	63	63	.874	32	32	PMS	1161	221	473	6	21	10	1	23	61	59	.3
PJ01	78+0.265	2.1 W FLATHEAD CO	LINCOLN	1	37	53	2.143	22	24	RMS	1020	132	290	0	17	6	14	23	60	59	.9
PJ01	521+0.454	20.0 E VALLEY CO	VALLEY	3	50	55	5.117	24	27	PMS	988	133	413	3	18	10	4	25	62	59	2.0
PJ01	543+0.809	JCT FAS RTE 247	VALLEY	3	62	62	2.430	36	36	PMS	1606	216	616	5	19	10	4	25	63	59	.9
PJ02	142+0.345	4.4 E BEARMOUTH	GRANITE	8	33	34	1.595	24	28	RMS	148	19	379	0	8	6	3	29	46	59	.9
PJ03	240+0.700	1.4 S CASCADE CO	LEWIS AND CLARK	7	33	47	1.450	24	26	RMS	126	24	694	0	11	4	1	29	45	59	.8
PJ03	236+0.392	CRAIG JCT	LEWIS AND CLARK	7	33	47	1.782	24	26	RMS	125	39	632	0	11	4	1	29	45	59	1.0
PJ02	433+0.400	5.9 W PARK CITY	STILLWATER	11	28	55	5.699	24	26	RMS	394	51	585	2	16	4	2	29	53	59	2.7
PJ02	580+0.697	0.3 E JCT FAI 94	ROSEBUD	12	31	47	7.024	20	26	RMS	128	16	379	0	10	4	2	29	45	59	3.9
PJ02	548+0.875	8.0 E HYSHAM	TREASURE	11	33	56	2.508	22	24	RMS	172	22	280	0	11	6	1	29	47	59	1.3
PJ16	301+0.379	8.1 S FAS 363	PHILLIPS	3	38	42	8.114	24	26	RMS	314	52	355	0	12	8	4	28	52	59	3.9
PJ19	16+0.911	4.4 W ANACONDA	DEER LODGE	9	51	59	5.072	28	28	PMS	1714	248	501	4	17	10	10	23	64	59	1.8
PJ18	34+0.903	JCT FAS RTE 462	ROSEBUD	12	31	56	3.183	20	24	BST	179	23	422	0	10	7	1	29	47	59	1.7
PJ15	256+0.590	8.0 E FAP 42	MCCONE	4	40	54	5.801	24	24	RMS	331	50	266	0	15	9	1	27	52	59	2.8
PJ15	79+0.286	JCT SPUR FAP 15	FERGUS	5	47	54	1.761	24	31	RMS	1483	172	733	7	18	9	3	26	63	59	.7
PJ15	242+0.465	3.5 E FAS 462	GARFIELD	5	38	54	6.092	24	24	RMS	310	47	243	0	14	9	1	27	51	59	3.0
PJ15	76+0.912	11.9 E FAP 45	FERGUS	5	47	54	2.367	24	31	PMS	1830	217	565	7	20	9	4	24	64	59	.9
PJ13	82+0.226	1.4 N GALLITIN CO	GALLATIN	10	49	52	.830	27	27	RMS	253	39	277	0	13	8	1	28	51	59	.4
PJ13	83+0.952	SAPPINGTON JCT	JEFFERSON	7	32	48	5.273	24	30	RMS	277	42	323	0	13	5	19	24	61	59	2.6
PJ29	43+0.258	TWIN BRIDGES	MADISON	9	39	39	6.634	20	24	RMS	1119	167	420	0	17	7	1	27	52	59	4.5
PJ32	14+0.125	10.0 N JCT FAP 1	ROOSEVELT	3	33	36	9.277	20	24	BST	318	44	203	0	17	7	1	27	52	59	4.5
PJ37	52+0.327	ASHLAND	ROSEBUD	12	57	57	1.967	28	28	PMS	759	102	435	4	16	10	2	26	58	59	.8
PJ29	0+0.245	ENNIS LIMITS	MADISON	9	50	50	5.436	24	24	RMS	681	143	420	5	18	7	2	25	57	59	2.3
PJ24	76+0.133	3.9 E LINCOLN	LEWIS AND CLARK	7	60	60	5.887	24	24	PMS	1128	169	295	7	21	10	2	21	61	59	2.3
PJ23	72+0.957	3.4 N FAP 37	POWDER RIVER	12	28	41	3.380	24	24	BST	512	74	258	2	17	8	2	26	55	59	1.5
PJ48	0+2.579	HARDIN	BIG HORN	11	70	70	.161	40	40	PMS	2992	418	299	7	21	10	20	9	67	59	.1
PJ45	23+0.831	4.4 S WHEATLAND CO	SWEET GRASS	10	46	46	4.430	24	26	BST	234	30	561	0	9	9	3	29	50	60	2.2
PJ43	9+0.491	JCT FAS RTE 235	FERGUS	5	50	50	5.335	24	28	RMS	763	99	318	2	14	10	8	25	59	60	2.2
PJ53	46+0.272	LAVINA	GOLDEN VALLEY	11	56	56	.417	30	30	BST	943	122	535	3	13	10	8	27	61	60	.2
PJ53	4+0.315	BILLINGS	YELLOWSTONE	11	63	63	2.024	32	32	PMS	2236	290	565	5	21	10	4	22	66	60	.7
PJ24	43+0.145	7.5 E POWELL CO	POWELL	8	61	61	12.512	24	26	PMS	1186	195	299	6	19	10	7	20	62	60	4.8
PJ28	0+0.000	SILVERGATE	PARK	10	36	72	8.703	22	22	BST	340	76	253	4	18	6	0	25	53	60	4.1
PJ30	10+0.100	10.1 N JCT RTE 22	SHERIDAN	3	40	40	10.490	20	24	RMS	277	38	290	0	14	8	2	28	52	60	5.0
PJ36	31+0.138	LAKE CO	LAKE	1	40	40	.511	20	25	BST	476	71	266	0	13	7	10	26	56	60	.2
PJ36	40+0.186	LAKE CO	LAKE	1	37	65	6.525	24	26	RMS	457	68	318	0	13	7	8	27	55	60	2.9
PJ32	23+0.431	11.8 S DANIELS CO	ROOSEVELT	3	33	36	4.759	20	24	BST	259	36	220	0	14	8	1	28	51	60	2.3
PJ13	27+0.156	10.8 S CAMERON	MADISON	9	34	34	10.807	20	24	RMS	484	96	838	0	10	9	9	28	56	60	4.8
PJ10	90+0.926	1.5 N HILL CO	HILL	2	30	73	6.098	22	26	RMS	1058	137	535	4	17	7	7	26	61	60	2.4
PJ11	105+0.327	0.3 N RINGLING	MEAGHER	10	36	47	4.192	24	24	RMS	307	46	469	0	13	8	2	29	52	60	2.0
PJ11	100+0.703	2.8 MEAGHER CO	MEAGHER	10	31	73	4.600	22	24	PMS	254	38	252	0	12	6	5	28	51	60	2.3
PJ14	195+0.388	3.3 E FAS 310	MUSSELSHELL	11	39	39	8.309	20	24	RMS	461	59	354	0	12	9	6	28	55	60	3.7
PJ14	212+0.433	5.3 E ROSEBUD CO	ROSEBUD	12	46	57	4.717	20	24	RMS	236	37	203	0	12	10	1	27	50	60	2.4
PJ19	22+0.028	9.6 W ANACONDA	DEER LODGE	9	51	59	2.255	32	32	PMS	1482	214	456	0	18	8	15	23	64	60	.8
PJ19	34+0.421	2.7 N JCT RTE 35	GRANITE	8	57	57	4.157	32	32	BST	459	66	737	0	10	10	6	29	55	60	1.9
PJ02	574+0.812	4.2 W ROSEBUD	ROSEBUD	12	31	40	1.397	22	26	RMS	127	16	761	0	10	5	1	30	46	60	.8
PJ04	54+0.307	JCT FAI 90	YELLOWSTONE	11	64	64	.224	68	68	PMS	4194	545	1424	8	24	10	4	24	70	60	.1
PJ03	438+0.515	8.2 N FAS 445	GLACIER	2	58	64	6.011	44	44	PMS	1031	201	273	7	23	10	2	19	61	60	2.3
PJ02	299+0.653	1.7 W MANHATTAN	GALLATIN	10	31	31	1.705	22	28	RMS	376	48	603	0	11	8	6	29	54	60	.8
PJ02	147+0.035	7.6 W DRUMMOND	GRANITE	8	36	36	3.657	22	32	BST	148	19	201	0	11	6	1	29	47	60	1.9
PJ01	278+0.091	0.4 W FAI 15	TOOLE	2	60	60	.368	68	68	PMS	1372	205	3400	4	16	10	4	29	63	60	.1
PJ01	408+0.325	4.2 E CHINOOK	BLAINE	2	40	56	5.091	28	30	PMS	1665	216	612	6	16	10	7	25	64	60	1.8
PJ01	164+0.714	11.2 E WEST GLAC	FLATHEAD	1	49	59	1.514	26	26	PMS	892	170	357	6	19	10	3	23	61	61	.6
PJ02	76+0.550	ALBERTON	MINERAL	8	26	34	.790	20	20	BST	118	15	257	0	13	3	1	29	46	61	.4
PJ01	634+0.794	8.6 E BROCKTON	ROOSEVELT	3	52	52	3.299	24	30	RMS	725	94	367	0	13	10	11	26	60	61	1.3
PJ02	423+0.152	1.5 W COLUMBUS	STILLWATER	11	35	53	2.940	24	28	RMS	191	24	348	0	13	7	1	29	50	61	1.5

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BY IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS---- END	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P001	499+1.054	SACO	PHILLIPS	3	55 55	1.515	24	26	RMS	1132	152	510	0	12	10	15	26	63	61	.6
P004	57+0.986	2.7 E LAUREL	YELLOWSTONE	11	64 64	.213	30	30	PMS	2595	357	506	10	28	10	0	20	68	61	.1
P005	180+0.906	JCT FAP 33	LINCOLN	1	50 50	6.546	24	24	RMS	381	49	353	0	15	9	3	28	55	61	2.9
P003	227+0.885	WOLF CREEK JCT	LEWIS AND CLARK	7	35 47	8.527	24	26	RMS	135	42	260	0	12	6	1	28	47	61	4.5
P003	246+0.952	NOVAK CR BRIDGE	CASCADE	6	33 33	3.973	20	24	PMS	117	17	405	0	12	4	1	29	46	61	2.1
P003	324+0.541	1.5 N FAIRFIELD	TETON	6	21 45	2.698	20	24	BST	707	91	453	0	12	3	18	27	60	61	1.1
P016	237+0.411	4.6 S PHILLIPS CO	FERGUS	5	60 60	4.583	28	28	PMS	321	53	749	0	9	10	6	29	54	61	2.1
P017	19+0.177	0.6 E DIAMOND INT	CUSTER	12	29 41	3.286	24	26	BST	168	21	889	0	10	5	4	30	49	61	1.7
P019	30+0.851	.8 S JCT FA RTE 35	GRANITE	8	57 57	.817	32	32	BST	540	78	340	3	16	10	2	27	58	61	.3
P020	23+0.110	RICHLAND CO	RICHLAND	4	54 54	5.767	28	28	RMS	1041	135	301	2	17	10	10	23	62	61	2.2
P016	278+0.473	6.3 N INO RES	PHILLIPS	3	47 47	5.924	25	25	BST	182	30	515	0	8	8	5	29	50	61	3.0
P014	207+0.150	ROSEBUD CO	ROSEBUD	12	46 57	5.287	20	24	RMS	261	41	333	0	12	10	2	28	52	61	2.5
P015	238+0.926	JCT FAS 462 & 465	GARFIELD	5	38 54	2.537	24	24	RMS	318	48	312	0	15	9	2	28	54	61	1.2
P014	130+0.503	RYEGATE	GOLDEN VALLEY	11	37 53	2.478	21	24	RMS	1097	142	333	0	13	6	20	24	63	61	.9
P014	124+0.946	2.4 E GOLD VAL CO	GOLDEN VALLEY	11	56 71	4.540	28	28	PMS	948	123	558	3	16	10	6	27	62	61	1.7
P037	42+0.082	LAME DEER	ROSEBUD	12	75 75	4.469	24	24	PMS	1144	154	237	0	14	9	20	20	63	61	1.7
P027	0+0.355	EKALAKA	CARTER	12	50 50	6.902	22	24	PMS	337	43	431	0	11	10	4	29	54	61	3.2
P023	64+0.575	8.6 S COALWOOD	POWDER RIVER	12	29 41	8.397	24	24	BST	373	54	258	0	15	10	3	27	55	61	3.8
P024	82+0.008	1.0 W JCT FAS 279	LEWIS AND CLARK	7	57 64	4.104	28	30	PMS	988	148	333	7	17	10	5	23	62	61	1.6
P054	0+0.000	WYOMING LINE	POWDER RIVER	12	59 66	9.121	24	24	BST	294	38	258	0	13	10	2	28	53	61	4.3
P049	13+0.697	MADISON CO LINE	MADISON	9	59 59	2.491	24	24	PMS	900	117	333	0	16	8	12	25	61	61	1.0
P029	5+0.697	5.5 W ENNIS	MADISON	9	51 51	5.030	28	32	RMS	577	121	243	5	17	8	6	23	59	62	2.1
P024	35+0.684	POWELL CO	POWELL	8	61 61	7.494	24	26	PMS	1207	199	316	7	21	10	5	21	64	62	2.7
P022	100+0.176	8.3 S RICHLAND CO	RICHLAND	4	40 49	8.091	24	26	BST	559	83	448	0	8	8	16	27	59	62	3.3
P032	44+0.481	9.3 N DANIELS CO	DANIELS	3	33 35	3.711	20	24	BST	342	47	372	0	12	8	7	28	55	62	1.7
P012	93+0.363	JCT FAP 8	BROADWATER	7	68 68	.330	40	40	RMS	583	75	75	8	25	10	1	15	59	62	.1
P014	155+0.157	3.4 E MUSSELS CO	MUSSELSHELL	11	56 56	2.851	24	28	RMS	236	30	530	0	10	9	4	29	52	62	1.4
P010	3+0.530	GREAT FALLS	CASCADE	6	40 71	3.633	28	28	PMS	2037	264	562	6	27	9	2	23	67	62	1.2
P018	1+0.000	MILES CITY LIMITS	CUSTER	12	57 57	1.171	32	32	BST	2030	263	504	6	21	10	8	22	67	62	.4
P022	20+0.923	3.0 E SHERIDAN CO	SHERIDAN	3	36 36	8.441	22	25	BST	347	52	435	0	14	9	4	28	55	62	3.8
P016	284+0.393	12.2 N INO RES	PHILLIPS	3	42 42	6.398	20	24	RMS	190	31	634	0	10	8	4	29	51	62	3.1
P003	16+0.183	LIMA	BEAVERHEAD	6	33 56	7.602	22	24	RMS	114	14	780	0	10	4	3	30	47	62	4.0
P002	560+0.881	JCT FAS 315	ROSEBUD	12	41 41	4.285	24	31	RMS	536	69	434	0	13	7	11	28	59	62	1.8
P006	2+0.265	2.3 S IDAHO LINE	SANDERS	8	63 63	2.361	28	28	RMS	505	73	312	5	14	9	4	26	58	62	1.0
P002	412+0.892	0.3 E SPRINGT INT	STILLWATER	11	31 59	5.347	24	30	RMS	245	31	522	2	15	5	2	29	53	62	2.5
P002	137+0.241	0.2 E BEARMOUTH	GRANITE	8	33 34	3.680	22	28	RMS	148	19	414	0	11	7	2	29	49	62	1.9
P001	156+0.627	3.2 E WEST GLACIER	FLATHEAD	1	65 65	.521	24	28	RMS	952	181	378	7	23	10	0	23	63	62	.2
P001	308+0.048	1.0 E LIBERTY CO	LIBERTY	2	47 60	7.280	26	26	RMS	789	102	442	5	17	10	2	27	61	62	2.8
P001	157+0.164	3.7 E WEST GLACIER	FLATHEAD	1	48 49	2.350	24	28	PMS	936	178	154	6	17	7	20	13	63	63	.9
P001	439+1.027	6.4 W PHILLIPS CO	BLAINE	2	35 71	6.447	24	24	BST	1012	131	469	3	18	6	11	26	64	63	2.3
P001	246+0.564	11.1 E FAS 444	GLACIER	2	61 61	.492	32	35	RMS	1264	189	680	5	14	10	10	26	65	63	.2
P001	546+0.252	2.4 E FAS 247	VALLEY	3	53 53	8.404	24	30	RMS	1330	179	631	0	15	10	15	26	66	63	2.9
P002	151+0.444	3.2 W ORUMMOND	GRANITE	8	36 36	1.494	22	32	BST	148	19	336	0	11	7	3	29	50	63	.7
P001	639+0.785	4.3 W CULBERTSON	ROOSEVELT	3	52 52	2.725	24	30	RMS	766	99	367	0	12	10	14	26	62	63	1.0
P005	156+0.922	LINCOLN CO	LINCOLN	1	55 60	2.697	26	26	PMS	629	81	319	4	17	9	5	26	61	63	1.1
P006	37+0.660	WHITE PINE	SANDERS	8	48 54	8.533	24	28	PMS	706	103	536	3	17	9	6	27	62	63	3.2
P003	183+0.377	1.6 N CLANCY	JEFFERSON	7	30 69	.424	24	24	PMS	505	65	187	5	23	6	0	25	59	63	.2
P003	253+0.688	0.2 N TINT INTCH	CASCADE	6	33 53	1.210	24	28	RMS	95	14	198	0	12	6	0	29	47	63	.6
P002	565+0.190	1.6 W FORSYTH	ROSEBUD	12	50 56	.768	24	32	PMS	705	91	696	5	16	8	5	28	62	63	.3
P016	199+0.150	JCT FAP RTE 15	FERGUS	5	62 62	9.657	30	30	PMS	346	58	554	0	12	10	6	28	56	63	4.2
P017	31+0.365	4.0 W TERRY	PRAIRIE	4	31 57	4.030	24	30	RMS	157	20	530	0	14	6	1	29	50	63	2.0
P016	242+0.067	PHILLIPS CO	PHILLIPS	3	60 60	5.581	28	28	PMS	325	54	477	0	11	10	7	28	56	63	2.5
P014	224+0.418	5.1 W INGOMAR	ROSEBUD	12	48 63	5.122	25	25	RMS	255	40	258	0	13	10	3	28	54	63	2.4
P008	78+0.114	TOWNSEND	BROADWATER	7	39 39	9.673	24	32	RMS	1527	198	629	0	12	10	20	25	67	63	3.2
P014	23+0.519	MEAGHER CO	MEAGHER	10	55 55	9.978	24	27	PMS	377	56	308	4	16	9	1	27	57	63	4.3

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P011	167+0.996	NEIHART	CASCADE	6	52	52	10.526	22	26	PMS	491	73	492	5	16	8	2	28	59	63	4.3
P028	101+0.121	0.6 S FAP 4	CARBON	11	68	68	.587	40	40	PMS	1679	335	309	7	24	10	12	14	67	63	.2
P027	35+0.755	BAKER	FALLON	12	57	60	8.648	28	28	RMS	581	75	492	0	10	10	12	28	60	63	3.5
P023	95+0.564	6.0 N CARTER CO	POWDER RIVER	12	54	54	6.028	24	28	RMS	550	79	462	0	11	10	13	27	61	64	2.4
P024	72+0.242	LINCOLN	LEWIS AND CLARK	7	60	60	3.867	24	24	PMS	1401	210	450	6	19	10	9	23	67	64	1.3
P037	64+0.304	POWDER RIVER CO	POWDER RIVER	12	57	57	5.314	24	28	PMS	639	86	289	0	15	10	11	26	62	64	2.0
P013	24+0.369	13.3 S CAMERON	MADISON	9	34	34	2.648	20	24	RMS	431	86	871	0	10	7	13	29	59	64	1.1
P013	83+0.044	JEFFERSON CO LINE	JEFFERSON	7	34	52	.908	22	24	RMS	340	52	342	3	17	8	1	28	57	64	.4
P008	108+0.855	1.0 S FAI 90	BROADWATER	7	68	68	.321	44	44	RMS	893	116	118	10	28	10	1	15	64	64	.1
P008	107+0.893	JCT FAI 90	BROADWATER	7	68	68	.308	40	40	PMS	893	116	118	10	28	10	1	15	64	64	.1
P010	80+0.000	BIG SANDY	CHOUTEAU	6	33	63	4.794	24	26	RMS	1200	156	567	0	13	7	20	26	66	64	1.6
P014	229+0.532	INGOMAR	ROSEBUD	12	55	63	12.892	20	20	RMS	224	35	290	0	13	9	4	28	54	64	5.9
P020	63+0.923	FAIRVIEW	RICHLAND	4	56	56	.349	24	32	RMS	1400	182	828	8	21	10	1	27	67	64	.1
P016	296+0.098	13.6 S FAS 363	PHILLIPS	3	42	61	5.278	22	24	RMS	225	37	243	0	15	9	2	28	54	64	2.4
P017	22+0.374	PRAIRIE CO LINE	PRAIRIE	4	31	57	7.332	22	26	RMS	130	16	456	0	13	6	2	29	50	64	3.7
P003	256+0.365	I 15 SEPARATION	CASCADE	6	33	53	1.999	20	24	RMS	82	12	365	0	9	7	1	30	47	64	1.1
P003	327+0.226	4.2 N FAIRFIELD	TETON	6	40	40	12.297	24	30	RMS	757	98	600	0	16	7	12	28	63	64	4.5
P003	400+0.021	9.2 S FAP RTE 1	GLACIER	2	51	51	2.132	26	28	RMS	677	163	454	5	17	10	5	25	62	64	.8
P005	134+0.691	6.8 N WHITEFISH	FLATHEAD	1	55	59	10.962	24	28	PMS	976	126	569	3	17	10	8	27	65	64	3.8
P006	0+0.000	IDAHO LINE	SANDERS	8	52	65	2.260	24	28	RMS	507	74	371	6	16	8	3	27	60	64	.9
P006	10+0.279	JCT FAS 202	SANDERS	8	52	52	1.095	24	28	RMS	558	81	283	6	15	10	4	26	61	64	.4
P002	540+0.855	HYSHAM	TREASURE	11	33	56	8.004	22	24	RMS	236	30	544	0	13	7	5	29	54	64	3.7
P002	551+0.386	ROSEBUD CO.	ROSEBUD	12	36	42	5.503	26	30	RMS	166	21	672	0	11	7	4	30	52	64	2.6
P002	417+0.827	2.9 W COLUMBUS	STILLWATER	11	51	51	1.376	34	34	BST	321	41	426	2	13	8	5	29	57	64	.6
P001	638+0.084	6.0 W CULBERTSON	ROOSEVELT	3	52	52	1.723	24	30	RMS	751	97	612	0	14	10	11	28	63	64	.6
P001	404+0.087	CHINOOK	BLAINE	2	44	56	4.248	28	30	PMS	1924	250	663	6	17	10	12	24	69	64	1.3
P001	278+0.809	0.3 E FAI 15	TOOLE	2	56	56	.440	60	60	PMS	3579	501	1700	3	14	9	20	26	72	64	.1
P001	421+0.341	3.4 W HARLEM	BLAINE	2	39	62	2.572	26	31	RMS	1476	191	612	6	16	10	10	25	67	64	.8
P001	372+0.142	8.6 E KREMLIN	HILL	2	60	60	7.002	32	32	PMS	1998	259	696	4	18	10	13	24	69	64	2.2
P001	251+0.988	2.7 W OF CUT BANK	GLACIER	2	72	72	2.128	50	50	PMS	1685	252	272	10	30	10	3	16	69	65	.7
P001	123+0.228	KALISPELL U L	FLATHEAD	1	67	67	1.404	44	44	PMS	3505	490	731	9	27	10	7	20	73	65	.4
P001	363+0.532	KREMLIN FAS 450	HILL	2	36	70	8.591	28	32	RMS	1228	159	696	7	18	10	5	27	67	65	2.8
P006	4+0.625	4.6 E IDAHO LINE	SANDERS	8	52	64	3.629	24	28	RMS	502	73	283	5	17	9	4	26	61	65	1.4
P006	29+0.459	TROUT CREEK	SANDERS	8	48	54	8.234	24	28	PMS	737	107	569	5	17	9	6	27	64	65	3.0
P002	571+0.969	7.0 W ROSEBUD	ROSEBUD	12	28	52	2.843	20	20	RMS	123	15	593	0	10	3	8	30	51	65	1.4
P003	251+0.599	0.6 N HARDY CR SEP	CASCADE	6	33	53	1.492	20	24	RMS	102	15	270	0	12	6	2	29	49	65	.8
P020	1+0.761	GLENDIVE	DAWSON	4	64	64	4.375	40	40	PMS	1489	193	222	8	24	10	9	17	68	65	1.4
P019	12+0.378	ANACONDA	DEER LODGE	9	51	59	4.529	28	28	PMS	2049	297	454	4	16	10	20	20	70	65	1.4
P015	83+0.164	LEWISTOWN	FERGUS	5	42	72	5.079	24	30	PMS	1148	149	415	4	19	10	9	25	67	65	1.7
P016	187+0.803	7.2 N FERGUS CO	FERGUS	5	52	52	4.896	24	28	RMS	469	60	377	3	14	10	6	28	61	65	1.9
P010	16+0.224	CHOUTEAU CO	CHOUTEAU	6	51	57	3.832	30	30	PMS	1663	218	565	4	16	10	15	24	69	65	1.2
P007	74+0.821	FLORENCE	RAVALLI	8	74	75	2.051	38	38	PMS	3737	485	344	10	30	10	14	9	73	65	.6
P011	182+0.694	4.2 N MONARCH	CASCADE	6	40	40	6.667	26	26	BST	497	74	571	3	15	9	6	28	61	65	2.6
P014	108+0.042	7.1 E FAP 45	WHEATLAND	10	53	53	8.427	24	28	RMS	918	119	558	4	16	10	8	27	65	65	2.9
P042	46+0.037	10.2 S VALLEY CO	MCCONE	4	57	64	6.173	24	32	BST	148	23	571	0	8	10	5	29	52	65	3.0
P027	44+0.455	8.6 N BAKER	FALLON	12	58	58	10.261	30	30	BST	355	46	333	0	12	10	9	28	59	65	4.2
P029	67+0.995	7.0 E JEFF CO LINE	JEFFERSON	7	51	51	.888	34	34	RMS	395	51	243	0	13	10	9	27	59	65	.4
P023	50+0.581	POWDER RIVER CO	POWDER RIVER	12	52	60	5.178	24	28	RMS	346	50	378	0	11	10	9	28	58	65	2.2
P049	0+0.335	DILLON	BEAVERHEAD	9	36	73	.102	40	40	RMS	2872	373	828	5	18	6	20	23	72	65	
P045	80+0.473	0.9 S FERGUS CO	JUDITH BASIN	6	46	59	.876	24	24	RMS	810	105	518	0	12	8	18	27	65	65	.3
P045	28+0.273	WHEATLAND CO	WHEATLAND	10	46	46	5.073	25	26	BST	230	29	398	0	13	10	3	29	55	65	2.3
P045	70+0.433	FERGUS CO	FERGUS	5	47	57	1.200	24	24	RMS	935	121	266	2	12	9	20	23	66	66	.4
P049	16+0.192	2.5 E MADISON CO	MADISON	9	53	53	10.659	24	28	RMS	904	117	586	2	14	8	15	27	66	66	3.6
P046	58+0.864	.8 E BEAVERHEAD CO	BEAVERHEAD	9	61	61	6.050	26	28	PMS	341	51	327	4	16	8	3	28	59	66	2.5
P024	133+0.232	5.7 E SPUR RTE 24	CASCADE	6	64	64	5.275	32	32	PMS	1702	238	562	5	23	10	8	24	70	66	1.6

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P037	38+0.689	ROSEBUD CO	ROSEBUD	12	75 75	.873	40	40	PMS	1207	162	150	10	30	10	4	14	68	66	.3
P013	96+0.554	THREE FORKS	GALLATIN	10	50 55	.555	32	32	RMS	1449	188	808	2	12	8	20	27	69	66	.2
P015	10+0.428	JCT FAS RTE 427	JUDITH BASIN	6	64 64	7.500	32	32	PMS	1258	149	352	7	19	10	8	24	68	66	2.4
P017	38+0.695	2.1 E TERRY	PRAIRIE	4	31 49	5.120	24	24	RMS	85	12	312	0	14	5	1	29	49	66	2.6
P005	67+0.425	6.4 N POLSON	LAKE	1	54 70	3.855	30	30	PMS	1594	215	414	7	26	9	6	22	70	66	1.2
P004	13+0.436	13.4 N WYO LINE	CARBON	11	59 59	5.773	32	32	PMS	868	112	599	0	15	10	14	27	66	66	2.0
P001	231+0.966	3.2 E BLACKFOOT	GLACIER	2	50 63	1.203	24	30	RMS	1306	208	530	6	17	10	12	24	69	66	.4
P001	159+0.503	6.0 E WEST GLACIER	FLATHEAD	1	49 59	5.217	26	26	PMS	899	171	357	5	18	8	12	23	66	66	1.8
P001	515+0.618	14.2 E VALLEY CO	VALLEY	3	50 55	5.795	24	27	PMS	1017	137	461	5	18	10	8	26	67	66	1.9
P001	542+0.429	GLASGOW	VALLEY	3	62 62	1.386	68	68	PMS	3093	417	2088	6	24	10	6	27	73	66	.4
P002	307+0.688	3.0 W BELGRADE	GALLATIN	10	23 59	3.045	24	24	PMS	695	90	603	0	15	6	15	28	64	66	1.1
P001	642+0.523	1.7 W CULBERTSON	ROOSEVELT	3	56 61	1.712	32	32	PMS	971	126	380	0	13	10	20	25	68	67	.5
P001	315+0.301	6.5 W CHESTER	LIBERTY	2	47 60	5.785	26	26	PMS	796	103	500	7	18	10	4	27	66	67	2.0
P001	197+0.193	0.6 W GLACIER CO	FLATHEAD	1	52 70	.623	26	26	PMS	778	148	324	8	25	10	0	23	66	67	.2
P001	393+0.855	2.8 E BLAINE CO	BLAINE	2	38 59	9.717	24	30	RMS	2154	280	663	5	18	10	15	24	72	67	2.7
P005	145+0.620	OLNEY	FLATHEAD	1	55 60	11.263	26	26	PMS	675	87	319	3	18	9	9	26	65	67	3.9
P005	71+0.313	6.2 S FAP 36	LAKE	1	62 62	6.212	32	32	PMS	1399	186	453	7	22	10	7	24	70	67	1.9
P003	260+0.248	CASCADE	CASCADE	6	24 54	1.792	22	24	RMS	60	9	544	0	13	3	1	30	47	67	.9
P003	184+0.095	2.3 N CLANCY	JEFFERSON	7	30 69	.517	24	24	PMS	505	65	218	5	24	7	1	26	63	67	.2
P002	609+0.538	I94 W MILES CITY	CUSTER	12	62 62	.908	32	32	PMS	1099	124	567	7	18	10	6	27	68	67	.3
P003	262+0.040	1.8 N CASCADE	CASCADE	6	24 53	12.577	24	24	RMS	63	9	461	0	13	4	1	30	48	67	6.5
P003	220+0.183	SPRING CR INTCH	LEWIS AND CLARK	7	35 35	7.702	20	24	PMS	55	17	635	0	10	5	2	30	47	67	4.1
P022	93+0.586	1.7 S RICHLAND CO	RICHLAND	4	37 41	3.258	24	26	BST	544	81	470	0	10	7	20	27	64	67	1.2
P018	18+0.057	2.0 S ROSEBUD CO	CUSTER	12	28 35	2.023	20	24	BST	263	34	655	0	8	8	13	29	58	67	.8
P015	0+0.000	JCT FAP RTE 11	CASCADE	6	60 60	5.418	32	32	PMS	1427	169	380	4	18	10	15	23	70	67	1.6
P015	316+0.710	12.0 E FAS 470	DAWSON	4	61 61	8.026	32	32	PMS	961	124	629	4	17	10	10	27	68	67	2.6
P012	2+0.270	2.3 E IDAHO LINE	GALLATIN	10	61 61	5.777	34	34	PMS	1395	322	680	6	19	10	12	23	70	67	1.7
P010	109+0.571	1.8 S FAP 1	HILL	2	52 52	1.796	32	32	PMS	1460	189	580	5	18	10	12	25	70	67	.5
P008	87+0.738	TOSTON APPP RD	BROADWATER	7	50 51	11.260	24	26	RMS	1181	153	500	4	16	10	14	25	69	67	3.5
P010	9+0.609	6.1 N GR FALLS	CASCADE	6	51 57	6.490	30	30	PMS	1738	225	414	4	16	10	19	22	71	67	1.9
P035	5+0.606	5.6 E FAP RTE 7	PAVALLI	8	58 58	4.522	26	26	BST	109	15	235	0	13	9	1	29	52	67	2.2
P028	96+0.673	JOLIET	CARBON	11	74 74	4.685	44	44	PMS	1490	298	344	10	30	10	3	17	70	67	1.4
P028	47+0.309	2.3 N WYO BORY	CARBON	11	65 65	6.415	28	28	PMS	487	109	394	7	20	10	0	26	63	67	2.4
P050	8+0.524	0.2 N FAS 499	GALLATIN	10	62 72	1.955	32	32	PMS	627	129	182	10	27	10	1	19	67	67	.6
P045	71+0.629	1.2 N FERGUS CO	FERGUS	5	41 70	6.838	24	24	PMS	872	113	349	7	23	10	2	25	67	67	2.3
P046	76+0.492	0.6 W DIVIDE	SILVER BOW	9	34 57	.490	32	32	BST	498	74	655	5	17	10	3	28	63	67	.2
P046	51+0.396	DEER LODGE CO LINE	DEER LODGE	9	61 61	5.577	26	28	PMS	283	42	364	5	15	10	2	28	60	68	2.2
P050	31+0.181	YELL PARK BDY	GALLATIN	10	60 60	8.921	28	28	PMS	815	127	436	7	21	10	4	26	68	68	2.9
P053	40+0.546	6.3 N GOLD VAL CO	GOLDEN VALLEY	11	56 56	4.843	30	30	BST	937	121	355	0	13	10	20	25	68	68	1.5
P037	33+0.065	5.6 W ROSEBUD CO	BIG HORN	11	74 74	5.621	40	40	PMS	1140	153	135	10	25	10	12	13	70	68	1.7
P007	73+0.547	1.0 S FLORENCE	RAVALLI	8	74 75	.667	44	44	PMS	3894	506	320	10	30	10	20	6	76	68	.2
P011	62+0.267	1.8 N FAI 90	PARK	10	41 41	2.293	20	24	RMS	1010	151	453	0	15	9	20	25	69	68	.7
P011	60+0.481	JCT FAI RTE 90	PARK	10	55 55	1.755	24	36	PMS	1155	173	580	7	18	10	9	26	70	68	.5
P011	49+0.902	JCT FAS 540	PARK	10	61 61	1.890	32	32	PMS	1824	392	748	9	25	10	6	22	72	68	.5
P022	89+0.524	CULBERTSON	ROOSEVELT	3	61 61	.496	36	36	PMS	626	93	560	7	16	10	5	28	66	68	.2
P006	12+0.353	1.0 E BULL RIVER	SANDERS	8	58 58	1.214	32	32	BST	801	104	526	5	20	10	5	27	67	68	1.7
P001	307+0.040	LIBERTY CO	LIBERTY	2	57 62	.983	32	32	PMS	590	86	264	7	17	10	6	25	65	68	.4
P001	254+0.578	CUT BANK	GLACIER	2	55 55	.229	42	42	PMS	816	106	629	4	17	10	10	27	68	68	.3
P002	78+0.778	1.5 E MISSOULA CO	MISSOULA	8	63 63	.670	24	24	RMS	3033	363	817	5	17	10	20	23	75	68	.1
P001	601+0.789	4.6 E FAP 32	ROOSEVELT	3	60 60	9.761	32	32	PMS	267	34	220	5	17	10	0	28	60	68	.3
P002	79+0.448	2.2 E MISSOULA CO	MISSOULA	8	64 64	.585	24	24	RMS	1452	174	680	6	20	10	9	26	71	68	2.8
P001	591+0.423	WOLF POINT	ROOSEVELT	3	58 58	5.798	32	32	PMS	324	42	289	7	16	10	1	28	62	69	.2
P001	573+0.032	FRAZER	VALLEY	3	58 61	8.057	24	32	PMS	1941	232	648	7	20	10	12	25	74	69	1.5
P001	424+0.712	HARLEM	BLAINE	2	68 68	4.358	40	40	PMS	1068	144	680	0	13	10	20	27	70	69	2.4
										1770	230	281	10	27	10	8	18	73	69	1.2

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- FNO	SPF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
P004	0+0.516	0.5 N WYO LINE	CARBON	11	56	63	12.924	32	32	PMS	838	108	569	4	18	10	10	27	69	69	4.0
P003	291+0.535	JCT FAI 15	CASCADE	6	67	67	.105	30	30	PMS	1167	145	576	9	26	10	0	26	71	69	
P003	184+0.612	2.8 N CLANCY	JEFFERSON	7	69	69	1.412	24	24	PMS	505	65	156	8	24	9	0	24	65	69	.5
P003	444+0.544	ST MARYS	GLACIER	2	64	64	4.280	32	32	PMS	1163	226	597	8	24	10	5	24	71	69	1.2
P003	448+0.813	4.3 N ST MARYS	GLACIER	2	56	64	4.001	32	32	PMS	1064	207	630	8	24	10	3	25	70	69	1.2
P003	133+0.875	N BUTTE LIMITS	SILVER BOW	9	50	50	.292	24	36	PMS	573	74	501	0	10	8	20	28	66	69	.1
P019	31+0.677	JCT FAP RTE 35	GRANITE	8	57	57	2.729	32	32	BST	509	73	768	0	8	10	18	29	65	69	1.0
P020	13+0.047	11.3 N GLENDIVE	DAWSON	4	69	69	5.607	40	40	PMS	855	111	184	7	25	10	6	21	69	69	1.7
P015	279+0.794	CIRCLE	MCCONE	4	66	66	1.016	32	32	PMS	1411	215	592	8	25	10	4	25	72	69	.3
P014	252+0.337	VANADA	ROSEBUD	12	54	54	7.161	24	24	RMS	212	33	258	3	16	10	2	28	59	69	2.9
P015	121+0.740	8.7 E FAP 16	FERGUS	5	29	58	1.467	18	24	RMS	309	47	369	0	9	5	20	28	62	69	.6
P011	75+0.310	CLYDE PARK	PARK	10	38	38	.061	20	24	RMS	597	89	582	0	11	8	20	28	67	69	
P008	98+0.993	0.8 E JCT FAS 437	BROADWATER	7	52	52	8.748	24	28	RMS	1488	193	377	3	17	10	20	22	72	69	2.4
P028	53+0.726	8.7 N WYO BDRY	CARBON	11	65	65	6.274	28	28	PMS	552	124	591	7	21	10	1	27	66	69	2.1
P051	38+0.441	5.8 E RICHLAND CO	RICHLAND	4	57	57	10.781	26	30	BST	222	31	565	0	12	10	8	29	59	69	4.4
P050	40+0.132	8.9 N PARK BDY	GALLATIN	10	60	60	7.823	26	28	PMS	913	143	436	7	22	10	5	25	69	69	2.4
P050	8+0.373	JCT FAS RTE 499	GALLATIN	10	64	64	.151	52	52	PMS	879	138	296	9	26	10	1	23	69	69	
P046	41+0.858	DEER LODGE CO LINE	DEER LODGE	9	61	61	9.356	26	28	PMS	286	42	353	6	17	9	2	28	62	70	3.6
P045	78+0.456	JUDITH BASIN CO	JUDITH BASIN	6	41	70	2.021	24	24	PMS	810	105	414	6	18	10	10	26	70	70	.6
P024	4+0.910	4.1 E BONNER	MISSOULA	8	68	68	2.624	40	40	PMS	1906	314	450	8	26	10	10	20	74	70	.7
P032	0+0.000	JCT FAP RTE 25	ROOSEVELT	3	33	36	3.765	20	24	BST	319	44	584	0	9	10	15	29	63	70	1.4
P028	45+0.000	MONT WYO BDRY	CARBON	11	65	65	2.331	28	28	PMS	442	99	408	8	21	10	1	26	66	70	.8
P008	65+0.436	0.7 S WINSTON	BROADWATER	7	56	65	11.541	32	32	PMS	1878	244	696	8	24	10	7	25	74	70	3.0
P011	157+0.700	CASCADE CO	CASCADE	6	59	63	7.208	26	26	PMS	347	52	260	7	19	10	1	27	64	70	2.6
P014	259+0.489	7.2 E VANADA	ROSEBUD	12	54	54	5.580	24	24	RMS	215	34	450	2	14	10	5	29	60	70	2.2
P016	180+0.604	FERGUS CO	FERGUS	5	63	63	1.119	30	30	PMS	403	52	367	7	19	10	1	28	65	70	.4
P020	31+0.497	SAVAGE	RICHLAND	4	74	74	1.484	40	40	PMS	1309	170	266	10	30	10	2	20	72	70	.4
P003	186+0.199	1.5 S MONT CITY	JEFFERSON	7	39	69	1.462	24	36	PMS	505	65	340	5	24	8	2	27	66	70	.5
P003	299+0.296	0.3 E VAUGHN INT	CASCADE	6	61	61	.335	24	30	PMS	915	118	780	6	19	10	7	28	70	70	.1
P006	47+0.218	2.6 E BELKNAP	SANDERS	8	61	64	2.474	32	32	PMS	820	119	378	8	24	10	3	25	70	70	.7
P001	581+0.089	ROOSEVELT CO	ROOSEVELT	3	57	61	9.308	32	32	PMS	1342	181	616	3	17	10	17	26	73	70	2.5
P001	661+0.539	5.6 W N D LINE	ROOSEVELT	3	55	62	5.604	32	32	PMS	791	106	352	8	19	10	7	25	69	70	1.7
P002	324+0.334	BOZEMAN	GALLATIN	10	52	54	1.498	24	32	RMS	410	53	860	5	18	8	5	29	65	70	.5
P001	656+0.309	10.8 W N D LINE	ROOSEVELT	3	55	62	5.246	32	32	PMS	751	101	536	8	19	10	5	27	69	70	1.6
P002	556+0.882	4.0 W FAS 315	ROSEBUD	12	41	41	4.019	24	31	RMS	225	29	705	0	14	8	10	29	61	70	1.6
P002	588+0.068	3.7 W HATHAWAY	ROSEBUD	12	31	73	3.767	24	24	BST	128	16	575	0	14	4	8	30	56	70	1.7
P002	290+0.336	JCT FAI RTE 90	GALLATIN	10	64	69	.852	32	32	PMS	518	67	681	7	21	10	1	29	68	71	.3
P001	670+0.214	2.8 N EAST GLAC	GLACIER	2	29	72	8.761	24	24	PMS	331	66	728	6	25	5	0	29	65	71	3.1
P001	457+0.675	3.1 E OODSON	PHILLIPS	3	63	63	9.025	32	32	PMS	1071	139	616	5	20	10	10	27	72	71	2.5
P001	271+0.001	7.6 E TOOLE CO	TOOLE	2	53	66	7.061	32	32	RMS	1315	197	503	4	17	10	18	24	73	71	1.9
P001	184+0.217	12.6 W GLACIER CO	FLATHEAD	1	67	67	12.259	32	32	PMS	738	140	575	7	21	10	6	26	70	71	3.7
P001	501+0.410	VALLEY CO	VALLEY	3	55	55	6.588	24	28	RMS	1059	142	435	0	18	9	20	25	72	71	1.8
P001	564+0.858	8.8 E NASHUA	VALLEY	3	61	61	8.184	32	32	PMS	1144	154	720	6	23	10	7	27	73	71	2.2
P005	77+0.587	JCT FAP 36	LAKE	1	62	62	1.837	32	32	PMS	1276	172	672	7	21	10	9	26	73	71	.5
P006	11+0.402	BULL RIVER	SANDERS	8	63	63	.956	28	28	RMS	576	84	342	8	19	10	5	26	68	71	.3
P003	23+0.785	DELL	BEAVERHEAD	9	33	65	13.236	24	26	RMS	55	7	965	0	10	5	6	30	51	71	6.5
P003	402+0.350	7.1 S FAP RTE 1	GLACIER	2	60	60	7.233	32	32	PMS	700	168	529	5	21	10	9	25	70	71	2.2
P021	47+2.078	CONRAD	PONDERA	6	51	65	8.734	32	32	RMS	336	43	428	4	16	10	7	28	65	71	3.1
P017	0+0.000	MILES CITY LIMITS	CUSTER	12	48	48	6.191	28	30	RMS	653	84	631	2	17	10	12	28	69	71	1.9
P015	137+0.626	1.1 E WINNETT	PETROLEUM	5	54	54	11.000	24	24	RMS	366	55	384	0	12	10	15	28	65	71	3.9
P016	272+0.176	FT BEL IND RES	PHILLIPS	3	49	49	6.252	22	22	BST	177	29	417	0	10	7	14	29	60	71	2.5
P015	7+0.062	JUDITH BASIN CO	JUDITH BASIN	6	61	61	3.343	32	32	PMS	1322	157	448	6	22	10	10	25	73	71	.9
P014	73+0.390	28.3 E FAP 11	MEAGHER	10	36	52	1.779	22	24	RMS	393	51	544	0	12	7	18	29	66	71	.6
P011	0+0.000	YELL PARK BDRY	PARK	10	75	75	1.016	48	48	PMS	1323	284	568	10	30	10	0	23	73	71	.3
P008	108+0.202	0.3 S FAI 90	BROADWATER	7	52	52	.653	24	28	RMS	893	116	558	4	17	10	13	27	71	71	.2

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN DIST	YEARS BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	ENO	SRF	DRN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ08	3+0.914	JCT FAS 407	POWELL	8	57	64	7.362	32	32	PMS	1353	175	504	8	25	10	6	25	74	71	1.9
PJ43	14+0.838	JCT FAS RTE 236	FERGUS	5	63	63	10.462	28	30	PMS	305	39	414	3	14	10	8	29	64	71	3.8
PJ43	35+0.280	ROY	FERGUS	5	62	62	7.565	30	30	PMS	287	37	600	3	16	10	5	29	63	71	2.8
PJ36	36+0.100	4.4 N FLATHEAD CO	FLATHEAD	1	37	61	4.101	24	26	RMS	433	64	825	0	10	7	20	29	66	71	1.4
PJ46	56+0.960	SILVER BOW CO LINE	SILVER BOW	9	61	61	1.055	26	28	PMS	230	34	377	5	16	10	2	29	62	71	.4
PJ47	0+0.000	JCT FAP RTE 19	DEER LODGE	9	49	49	5.992	20	26	RMS	1133	158	535	3	16	8	20	26	73	71	1.6
PJ45	67+0.899	FERGUS CO	FERGUS	5	47	73	1.926	24	24	PMS	860	111	494	2	13	10	19	27	71	71	.6
PJ50	0+0.557	WEST YELLOWSTONE	GALLATIN	10	68	68	7.126	40	40	PMS	1518	333	288	9	25	10	18	13	75	72	1.8
PJ36	18+0.961	JCT SPUR FAP 36	SANDERS	8	63	63	7.161	28	28	PMS	640	96	586	6	18	10	8	28	70	72	2.1
PJ28	90+0.985	BCYO	CARBON	11	74	74	4.433	40	40	PMS	1324	264	309	10	30	10	7	17	74	72	1.2
PJ07	83+0.246	0.5 N LOLO	MISSOULA	8	68	68	6.898	68	68	PMS	5569	723	1968	10	28	10	9	24	81	72	1.3
PJ08	52+0.831	3.0 E EAST HELENA	LEWIS AND CLARK	7	69	69	1.670	40	40	PMS	2562	391	344	9	26	10	20	13	78	72	.4
PJ10	20+0.057	3.8 N CHOUTEAU CO	CHOUTEAU	6	63	63	9.726	32	32	PMS	1655	215	640	6	21	10	14	25	76	72	2.3
PJ08	54+0.462	JEFFERSON CO	JEFFERSON	7	69	69	1.514	40	40	PMS	2421	370	283	10	27	10	20	10	77	72	.3
PJ11	154+0.339	3.3 S CASCADE CO	MEAGHER	10	59	63	3.335	40	40	PMS	305	45	890	6	19	10	1	29	65	72	1.2
PJ16	142+0.172	8.0 MI S KLEIN	MUSSELSHELL	11	65	65	8.038	32	32	PMS	1416	184	720	7	23	10	9	26	75	72	2.0
PJ23	14+0.654	12.4 S FAI RTE 94	CUSTER	12	62	62	10.568	30	30	PMS	429	62	510	4	14	10	11	28	67	72	3.5
PJ20	50+0.012	JCT FAP RTES 26 51	RICHLAND	4	73	73	1.750	83	83	PMS	3539	460	1760	9	28	10	6	26	79	72	.4
PJ04	33+0.199	FROMBERG	CARBON	11	54	54	.599	24	32	RMS	1902	247	896	4	16	10	20	26	76	72	.1
PJ01	256+0.020	CUT BANK	GLACIER	2	67	67	6.809	40	40	PMS	1499	224	244	7	22	10	20	16	75	72	1.7
PJ01	466+0.722	12.1 E DODSON	PHILLIPS	3	53	53	4.948	24	30	RMS	1384	179	600	2	17	10	20	26	75	72	1.2
PJ01	223+0.702	1.9 E FAP 3	GLACIER	2	60	60	.184	32	32	PMS	2215	423	464	8	23	10	20	16	77	72	
PJ01	332+0.634	HILL CO	HILL	2	71	71	9.281	40	40	PMS	960	124	244	9	28	10	4	22	73	72	2.5
PJ01	667+0.454	JCT FAP 1 E GLAC	GLACIER	2	29	72	2.287	24	24	PMS	580	117	726	7	28	5	1	28	69	72	.7
PJ02	616+0.197	I 94 E MILES CITY	CUSTER	12	62	62	.689	32	32	PMS	713	92	270	7	23	10	7	25	72	73	.2
PJ01	228+0.797	BLACKFOOT	GLACIER	2	57	57	1.050	24	32	RMS	1311	209	680	4	16	10	20	25	75	73	.3
PJ06	23+0.327	TUSCOR	SANDERS	8	59	64	6.097	32	32	PMS	756	110	672	4	22	10	8	28	72	73	1.7
PJ22	81+0.351	5.5 S FROID	ROOSEVELT	3	59	59	7.156	32	32	PMS	726	108	456	2	14	10	20	26	72	73	2.6
PJ16	247+0.534	5.6 N PHILLIPS CO	PHILLIPS	3	60	60	9.711	28	28	PMS	319	53	902	0	10	10	18	29	67	73	3.2
PJ16	220+0.624	JCT FAP RTE 43	FERGUS	5	62	62	3.889	30	30	PMS	398	66	414	3	16	10	11	28	68	73	1.2
PJ15	5+0.302	5.3 E FAP 11	CASCADE	6	61	61	1.770	32	32	PMS	1341	159	448	5	23	10	12	25	75	73	.4
PJ15	369+0.222	0.5 W GLENDIVE	DAWSON	4	69	69	.126	32	32	PMS	3575	429	432	9	26	10	20	15	80	73	
PJ11	97+1.030	MEAGHER CO	MEAGHER	10	42	52	2.756	24	24	PMS	243	36	774	0	10	8	18	29	65	73	1.0
PJ14	205+0.177	MELSTONE	MUSSELSHELL	11	46	46	1.991	24	24	BST	397	63	620	0	10	10	20	28	68	73	.6
PJ11	178+0.469	MONARCH	CASCADE	6	52	52	4.235	22	26	PMS	575	86	441	7	19	8	9	27	70	73	1.3
PJ24	127+0.465	JCT SPUR RTE 24	CASCADE	6	59	59	5.720	32	32	PMS	1710	239	643	8	26	10	9	24	77	73	1.3
PJ43	29+0.037	FERGUS	FERGUS	5	63	63	6.226	28	30	PMS	323	41	600	5	18	10	4	29	66	73	2.1
PJ50	70+0.196	5.6 S FAS 345	GALLATIN	10	58	60	6.250	32	32	PMS	1533	338	696	9	25	10	10	23	77	73	1.4
PJ46	64+0.920	WISE RIVER	BEAVERHEAD	9	70	70	.398	44	44	PMS	427	64	464	8	21	10	1	28	68	73	.1
PJ45	67+0.221	JUDITH BASIN CO	JUDITH BASIN	6	47	73	.678	24	24	PMS	870	113	518	3	14	10	20	27	74	74	.2
PJ50	15+0.000	6.7 N FAS 499	GALLATIN	10	63	63	1.642	32	32	PMS	763	119	182	6	17	10	20	20	73	74	.4
PJ42	31+0.776	29.8 N MCCONE CO	MCCONE	4	56	64	5.463	24	34	BST	118	18	380	0	14	10	7	29	60	74	2.2
PJ36	16+0.265	JCT FAS RTE 382	SANDERS	8	63	63	2.732	28	28	PMS	652	97	599	5	20	10	9	28	72	74	.8
PJ23	108+0.475	HAMMOND	CARTER	12	55	73	11.000	28	28	PMS	568	82	486	0	15	10	20	27	72	74	3.1
PJ24	16+0.029	POTOMAC	MISSOULA	8	68	68	6.575	40	40	PMS	1645	271	420	8	23	10	16	20	77	74	1.5
PJ11	126+0.708	WHITE SULPHUR	MEAGHER	10	65	65	2.417	40	40	PMS	810	121	320	8	22	10	10	24	74	74	.6
PJ14	55+0.903	10.8 E FAP 11	MEAGHER	10	56	58	7.271	28	28	PMS	362	47	415	3	17	10	10	28	68	74	2.3
PJ09	60+0.000	4.0 S CHOTEAU	TETON	6	36	36	4.014	22	25	RMS	521	83	518	0	15	8	20	28	71	74	1.2
PJ07	59+0.036	VICTOR FAS 370	RAVALLI	8	56	61	7.721	32	32	PMS	2527	328	720	10	25	10	11	23	79	74	1.6
PJ08	23+0.218	2.3 E ELLISTON	POWELL	8	73	73	2.363	56	56	PMS	1535	199	1920	9	28	10	2	28	77	74	.5
PJ07	66+0.762	JCT FAS 269	RAVALLI	8	56	61	6.777	32	32	PMS	3355	436	720	10	25	10	14	21	80	74	1.4
PJ16	208+0.837	9.7 N JCT FAP 15	FERGUS	5	61	61	11.832	30	30	PMS	323	54	583	0	12	10	17	29	68	74	3.8
PJ16	133+0.682	4.5 N MUSSELSH CO	MUSSELSHELL	11	66	66	8.466	32	32	PMS	1261	163	548	8	24	10	8	26	76	74	2.0
PJ19	38+0.582	.4 N PHILIPSBURG	GRANITE	8	60	60	9.701	32	32	PMS	491	71	428	5	17	10	11	28	71	74	2.8
PJ17	6+0.191	5.8 E MILES CITY	CUSTER	12	54	54	2.171	24	32	PMS	212	27	680	0	14	10	11	29	64	74	.8

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	BT	IM	SECTION LENGTH	WIDTH SRF	RDY	SUF TYP	ADT	DHV	SERVICE VOLUME	---SUFFICIENCY RATINGS--- FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P005	46+0.161	0.4 S RONAN	LAKE	1	70	70	.411	40	40	PMS	4151	606	784	8	25	10	20	18	81	74	.1
P006	104+0.678	4.5 W DIXON	SANDERS	8	69	69	.388	32	32	PMS	771	114	571	9	26	10	1	27	73	74	.1
P006	8+0.252	8.2 E IDAHO LINE	SANDERS	8	63	63	2.033	28	28	RMS	500	73	371	8	18	10	8	27	71	74	.6
P003	456+0.621	3.8 N BABB	GLACIER	2	61	61	.866	28	28	RMS	831	162	554	7	22	10	9	26	74	74	.2
P003	182+0.869	1.0 N CLANCY	JEFFERSON	7	69	69	.568	24	24	PMS	505	65	280	9	24	10	1	27	71	74	.2
P003	255+0.078	1.4 N TINT INTCH	CASCADE	6	63	63	1.287	24	24	PMS	90	13	545	5	14	8	1	30	58	74	.5
P001	0+0.000	IDAHO LINE	LINCOLN	1	54	55	2.622	24	30	PMS	1004	130	323	4	18	9	20	24	75	74	.7
P002	421+0.620	COLUMBUS	STILLWATER	11	47	63	1.520	24	30	RMS	253	32	348	4	15	8	10	29	66	74	.5
P002	83+0.169	0.3 W NINE MILE	MISSOULA	8	64	64	.315	30	30	PMS	509	66	199	10	26	10	0	25	71	74	.1
P002	538+0.971	I94 S HYSHAM	TREASURE	11	64	64	2.514	30	30	PMS	589	76	664	6	24	10	5	28	73	75	.7
P001	556+0.131	NASHUA	VALLEY	3	56	70	8.685	32	32	PMS	1183	159	696	7	23	10	10	27	77	75	2.0
P001	597+0.243	JCT FAP RTE 32	ROOSEVELT	3	58	58	4.565	32	32	PMS	1496	179	648	6	18	10	18	26	78	75	1.0
P001	280+0.100	SHELBY	TOOLE	2	54	59	11.649	32	32	PMS	1223	158	569	3	18	10	20	26	77	75	2.7
P002	699+0.045	5.1 E BAKER	FALLON	12	68	68	6.441	40	40	PMS	552	71	552	5	20	10	9	28	72	75	1.8
P003	314+0.375	7.3 N FAP 24	CASCADE	6	42	42	1.479	24	30	RMS	942	122	600	4	17	8	20	27	76	75	.4
P018	2+0.159	JCT FAS RTE 489	CUSTER	12	64	64	10.901	30	30	PMS	417	54	600	5	16	10	9	29	71	75	3.2
P015	17+0.930	7.5 E FAS 427	JUDITH BASIN	6	64	64	3.967	32	32	PMS	1258	149	592	7	23	10	11	26	77	75	.9
P011	40+0.712	3.5 N FAS 476	PARK	10	65	65	9.177	32	32	PMS	1183	254	748	9	26	10	7	25	77	75	2.1
P011	10+0.864	10.7 N GARDINER	PARK	10	69	69	5.766	32	32	BST	822	176	546	10	28	10	2	25	75	75	1.4
P023	101+0.585	CARTER CO	CARTER	12	54	54	6.878	24	28	RMS	554	80	462	2	13	10	20	27	72	75	1.9
P037	82+0.471	CUSTER FOR BDRY	POWDER RIVER	12	67	67	2.271	28	28	PMS	476	64	289	4	15	10	15	27	71	75	.7
P037	79+0.284	15.0 E POWDER R CO	POWDER RIVER	12	67	67	3.193	28	28	PMS	471	63	252	5	17	10	13	26	71	75	.9
P051	32+0.582	RICHLAND CO	RICHLAND	4	58	58	5.846	28	32	BST	201	28	428	0	13	10	13	29	65	75	2.0
P051	9+0.094	0.8 E DAWSON CO	DAWSON	4	59	59	9.669	28	28	PMS	194	27	371	4	17	10	5	29	65	75	3.4
P048	0+0.000	JCT FAI 90	BIG HORN	11	71	71	.294	40	40	PMS	3505	455	464	9	28	10	20	15	82	76	.1
P048	11+0.643	11.0 N HARDIN	BIG HORN	11	54	54	6.665	24	24	RMS	271	37	429	4	16	10	10	29	69	76	2.1
P037	69+0.625	6.3 E POWDER R CO	POWDER RIVER	12	67	67	9.659	28	28	PMS	485	65	435	6	19	10	10	28	73	76	2.6
P035	38+0.629	12.7 E GRANITE CO	GRANITE	8	74	74	.840	30	30	GRV	94	15	878	0	0	10	20	30	60	76	.3
P029	10+0.757	2.3 E VIRGINIA CTY	MADISON	9	56	56	2.337	28	28	PMS	569	119	194	5	18	10	20	21	74	76	.6
P016	290+0.795	18.9 S FAS 363	PHILLIPS	3	42	61	5.281	22	24	RMS	207	34	711	0	10	8	20	29	67	76	1.7
P016	224+0.499	3.9 N JCT FAP 43	FERGUS	5	59	64	12.938	28	28	RMS	322	54	629	0	11	10	20	29	70	76	3.9
P016	264+0.333	8.1 N FAS 376	PHILLIPS	3	57	59	7.800	24	29	PMS	179	30	353	2	16	10	8	29	65	76	2.7
P015	66+0.987	2.0 E FAP 45	FERGUS	5	47	54	6.538	24	31	PMS	1511	179	565	6	20	9	19	25	79	76	1.4
P017	43+0.815	7.2 E TERRY	PRAIRIE	4	49	49	1.041	24	32	RMS	80	10	616	5	16	8	0	30	59	76	.4
P019	62+0.597	1.0 S DRUMMOND	GRANITE	8	66	66	.628	40	40	PMS	785	113	240	10	27	10	6	23	76	76	.2
P018	13+0.047	7.0 S ROSEBUD CO	CUSTER	12	63	63	5.000	30	30	PMS	275	35	663	4	15	10	11	29	69	76	1.6
P004	0+0.000	WYOMING LINE	CARBON	11	49	49	.516	24	30	RMS	841	109	648	8	21	10	10	27	76	76	.1
P006	14+0.720	3.4 E BULL RIVER	SANDERS	8	59	64	8.606	32	32	PMS	665	97	428	7	23	10	8	27	75	76	2.2
P002	77+0.340	MISSOULA CO LINE	MISSOULA	8	26	34	1.263	20	20	BST	163	21	186	0	14	3	20	28	65	76	.4
P002	152+0.938	1.6 W DRUMMOND	GRANITE	8	64	64	1.554	24	24	PMS	148	19	193	7	17	10	1	29	64	76	.6
P002	80+0.033	3.4 W NINE MILE	MISSOULA	8	39	61	3.136	24	30	RMS	466	60	486	3	14	7	20	28	72	76	.9
P002	78+0.603	1.3 E MISSOULA CO	MISSOULA	8	36	45	.175	24	30	RMS	229	29	199	0	14	7	20	26	69	77	.1
P001	508+0.040	6.6 E VALLEY CO	VALLEY	3	66	66	7.595	40	40	PMS	1080	145	260	6	23	10	17	22	78	77	1.7
P001	299+0.766	7.3 W LIBERTY CO	TOOLE	2	57	62	7.266	32	32	PMS	831	108	569	2	18	10	20	27	77	77	1.7
P002	713+0.306	COLUMBUS	STILLWATER	11	72	72	.433	44	44	PMS	1531	199	795	10	30	10	4	26	80	77	.1
P023	25+0.192	23.0 S FAI RTE 94	CUSTER	12	62	62	2.619	30	30	PMS	410	59	485	6	16	10	13	28	73	77	.7
P016	181+0.704	1.1 N FERGUS CO	FERGUS	5	65	65	6.059	30	30	PMS	425	55	432	7	21	10	7	28	73	77	1.6
P014	0+0.888	TOWNSEND	BROADWATER	7	64	64	1.513	32	32	PMS	1200	180	569	9	25	10	10	25	79	77	.3
P033	54+0.527	0.7 N RES BR	LINCOLN	1	71	71	10.394	34	34	PMS	494	64	365	9	27	10	1	27	74	77	2.7
P042	8+0.299	6.3 N MCCONE CO	MCCONE	4	63	64	11.418	24	42	BST	118	18	627	0	8	10	15	30	63	77	4.2
P033	9+0.560	8.9 N LIBBY	LINCOLN	1	67	67	4.431	34	34	PMS	783	101	688	9	26	10	4	28	77	77	1.0
P051	18+0.776	10.5 E DAWSON CO	DAWSON	4	59	59	8.456	28	28	PMS	195	27	342	3	18	10	7	29	67	77	2.8
P050	76+0.436	0.7 N FAS 345	GALLATIN	10	64	64	3.598	32	32	PMS	2438	463	720	8	26	10	18	20	82	77	.6
P046	26+0.350	WISDOM	BEAVERHEAD	9	65	65	5.256	28	28	PMS	299	44	531	8	19	10	5	29	71	77	1.5
P046	1+0.166	IDAHO LINE	BEAVERHEAD	9	60	63	2.945	28	28	PMS	253	37	126	9	23	10	1	26	69	77	.9

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS 1ST	BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
P046	58+0.032	BEAVERHEAD CO LINE	BEAVERHEAD	9	61	61	.832	30	33	PMS	250	37	476	6	18	10	6	29	69	77	.3
P051	49+0.250	LAMBERT	RICHLAND	4	56	56	10.645	25	25	BST	307	42	400	0	15	10	19	28	72	78	3.0
P051	64+0.382	6.7 W FAP 20	RICHLAND	4	55	55	6.760	25	25	BST	516	72	508	3	17	10	17	28	75	78	1.7
P014	2+0.398	JCT FAS RTE 284	BROADWATER	7	64	64	3.999	32	32	PMS	459	68	487	8	23	10	5	28	74	78	1.0
P014	100+0.394	HARLOWTON	WHEATLAND	10	65	65	.504	40	40	PMS	1560	202	937	9	25	10	10	27	81	78	.1
P014	116+0.455	6.1 W GOLD VAL	WHEATLAND	10	67	67	6.108	40	40	PMS	797	103	281	8	24	10	11	25	78	78	1.3
P008	57+0.135	1.1 E BROADWATER	BROADWATER	7	72	72	8.303	34	34	PMS	1938	251	504	8	24	10	17	23	82	78	1.5
P004	33+0.798	0.6 N FROMBERG	CARBON	11	68	68	8.920	40	40	PMS	2082	270	696	8	25	10	15	24	82	78	1.6
P003	457+0.487	4.7 N BABB	GLACIER	2	52	52	5.856	22	28	RMS	481	93	500	3	15	10	20	27	75	78	1.5
P005	92+0.740	4.9 N ROLLINS	LAKE	1	64	64	.749	32	32	PMS	1412	190	276	7	23	10	20	20	80	78	.1
P001	291+0.748	6.8 E FAS 417	TOOLE	2	56	59	8.023	32	32	PMS	911	118	599	3	18	10	20	27	78	78	1.8
P002	644+0.095	2.6 E LOCATE	CUSTER	12	65	65	11.760	40	40	PMS	423	54	500	6	18	10	12	28	74	78	3.1
P002	143+0.940	6.0 E BEARMOUTH	GRANITE	8	70	70	.617	30	30	PMS	148	19	226	6	20	10	1	29	66	78	.2
P002	145+0.524	9.1 W ORUMMOND	GRANITE	8	36	36	.964	22	32	RMS	148	19	388	0	12	7	20	29	68	79	.3
P002	144+0.557	10.1 W ORUMMOND	GRANITE	8	36	36	.250	22	32	RMS	148	19	432	0	9	10	20	29	68	79	.1
P001	489+0.049	9.9 W SACO	PHILLIPS	3	67	67	9.965	40	40	PMS	1064	143	234	8	24	10	17	21	80	79	2.0
P001	262+0.815	TOOLE CO	TOOLE	2	67	67	.272	40	40	PMS	1134	170	296	7	22	10	20	21	80	79	.1
P001	611+0.926	POPLAR	ROOSEVELT	3	70	70	13.687	40	40	PMS	1244	161	281	7	23	10	20	21	81	79	2.6
P001	554+0.658	0.5 W NASHUA	VALLEY	3	56	70	.526	32	32	PMS	1233	166	544	9	26	10	11	25	81	79	.1
P003	181+1.116	CLANCY INTCH	JEFFERSON	7	69	69	.801	28	28	PMS	505	65	318	10	28	10	1	27	76	79	.2
P003	315+0.870	8.8 N FAP 24	CASCADE	6	62	62	1.232	35	35	BST	945	122	616	4	19	10	20	27	80	79	.2
P010	7+0.159	3.6 N GREAT FALLS	CASCADE	6	40	71	2.469	28	28	PMS	1769	229	666	8	28	9	12	25	82	79	.4
P014	217+0.153	10.0 E ROSEBUD CO	ROSEBUD	12	48	63	7.269	25	25	RMS	226	35	408	0	12	10	20	29	71	79	2.1
P013	93+0.693	GALLATIN CO LINE	GALLATIN	10	49	49	1.107	28	28	RMS	628	81	629	3	16	10	20	28	77	79	.3
P014	100+0.898	JCT FAP RTE 45	WHEATLAND	10	65	65	7.126	40	40	PMS	1025	133	281	8	25	10	14	23	80	79	1.4
P020	28+0.894	5.8 N RICHLAND CO	RICHLAND	4	75	75	2.598	40	40	PMS	1217	158	281	10	30	10	9	22	81	79	.5
P020	42+0.055	7.9 S FA RTE 51	RICHLAND	4	73	73	7.955	40	40	PMS	1601	208	281	10	30	10	13	19	82	79	1.4
P019	5+0.559	JCT FAP RTE 47	DEER LODGE	9	61	61	1.543	76	76	PMS	5537	719	2232	10	26	10	15	25	86	79	.2
P048	6+0.777	6.1 N HARDIN	BIG HORN	11	45	45	4.865	20	24	RMS	372	52	333	2	15	9	20	28	74	79	1.3
P046	73+0.646	8.3 E WISE RIVER	BEAVERHEAD	9	68	68	1.323	34	34	PMS	494	74	425	8	27	10	4	27	76	79	.3
P035	10+0.035	10.1 E FAP RTE 7	RAVALLI	8	66	66	4.539	28	28	BST	91	13	255	5	19	10	1	29	64	79	1.6
P023	119+0.471	20.4 N WYO LINE	CARTER	12	55	55	10.845	28	28	BST	642	93	510	4	17	10	20	27	78	79	2.4
P023	130+0.301	9.6 N WYO LINE	CARTER	12	65	65	9.551	40	40	PMS	668	100	260	3	22	10	20	24	79	80	2.0
P032	60+0.935	9.2 N SCOBEY	DANIELS	3	45	71	4.885	24	24	BST	72	10	333	4	17	10	2	36	69	80	1.8
P027	71+0.318	7.9 S WIBAUX	WIBAUX	4	65	65	2.083	28	28	PMS	467	60	312	10	27	10	3	27	77	80	.5
P027	66+0.022	10.3 N FAS 413	WIBAUX	4	65	65	5.304	28	28	PMS	420	54	504	8	24	10	6	28	76	80	1.3
P042	1+0.983	MCCONE CO	MCCONE	4	60	64	6.310	24	40	BST	122	19	571	0	8	10	20	30	68	80	2.0
P042	0+0.000	JCT FAP RTE 15	GARFIELD	5	60	64	1.990	24	40	BST	124	19	902	0	8	10	20	30	68	80	.6
P037	39+0.577	0.8 E ROSEBUD CO	ROSEBUD	12	75	75	1.113	48	48	PMS	1252	169	272	10	30	10	11	21	82	80	.2
P046	75+0.066	SILVER BOW CO LINE	SILVER BOW	9	68	68	1.422	34	34	PMS	496	74	470	9	28	10	2	28	77	80	.3
P020	6+0.132	4.4 N GLENDIVE	DAWSON	4	67	67	6.856	40	40	PMS	970	126	643	8	26	10	10	27	81	80	1.3
P015	57+0.839	3.4 E MOCCASIN	JUDITH BASIN	6	71	71	6.520	32	32	PMS	1392	165	666	9	27	10	10	26	82	80	1.2
P016	197+0.570	1.6 S FAP 15	FERGUS	5	62	62	1.564	32	32	PMS	728	122	569	4	18	10	20	27	79	80	.3
P017	36+0.554	TERRY	PRAIRIE	4	31	57	1.294	24	30	RMS	110	15	951	0	11	5	20	30	66	80	.4
P011	138+0.718	9.5 N FAP 14	MEAGHER	10	59	63	7.386	26	26	PMS	350	52	418	8	23	10	6	28	75	80	1.8
P009	12+0.411	12.4 N FAI 15	LEWIS AND CLARK	7	63	63	7.749	32	32	PMS	261	41	511	5	21	10	8	29	73	80	2.1
P006	46+0.236	1.6 E BELKNAP	SANDERS	8	58	58	.985	32	32	BST	764	111	510	5	17	10	20	27	79	80	.2
P001	648+0.067	3.0 E CULBERTSON	ROOSEVELT	3	61	61	8.291	32	32	PMS	757	102	629	5	16	10	20	28	79	80	1.7
P001	481+0.373	9.0 E MALTA	PHILLIPS	3	67	67	7.671	40	40	PMS	1080	140	247	8	25	10	17	21	81	80	1.5
P001	644+1.008	CULBERTSON	ROOSEVELT	3	56	61	3.010	32	32	PMS	950	128	629	7	17	10	20	27	81	80	.6
P002	325+0.832	1.5 E BOZEMAN	GALLATIN	10	71	71	.696	28	28	PMS	435	56	554	9	27	10	3	28	77	80	.2
P002	432+0.872	6.5 W PARK CITY	STILLWATER	11	55	55	.530	24	32	RMS	340	44	731	3	14	10	20	29	76	81	.1
P003	187+0.661	0.2 S MONT CITY	JEFFERSON	7	69	69	.162	34	34	PMS	505	65	512	10	28	10	2	28	78	81	
P003	394+0.089	5.9 N GLACIER CC	GLACIER	2	66	66	5.926	34	34	PMS	661	159	504	10	28	10	7	25	80	81	1.2
P010	39+0.560	0.4 N FT BENTON	CHOUTEAU	6	74	74	12.039	32	32	PMS	1048	136	621	10	28	10	7	27	82	81	2.2

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	----SUFFICIENCY RATINGS---- FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PD08	55+0.995	BROADWATER CO	BROADWATER	7	69	69	1.139	40	40	PMS	2013	261	320	9	27	10	20	18	84	81	.2
RD1C	29+0.727	13.5 N CHOUTEAU CO	CHOUTEAU	6	64	64	9.834	32	32	PMS	1631	212	720	7	23	10	18	26	84	81	1.6
PD14	158+0.003	6.3 E MUSSELS CO	MUSSELSHELL	11	56	56	2.482	24	28	RMS	241	31	586	3	15	10	17	29	74	81	.6
PD11	189+0.343	10.7 N MONARCH	CASCADE	6	69	69	1.931	48	48	PMS	416	62	520	10	28	10	1	28	77	81	.4
RD14	92+0.813	6.5 W HARLOWTON	WHEATLAND	10	68	68	6.513	40	40	PMS	631	82	344	8	24	10	12	26	80	81	1.3
RD15	368+0.650	GLENDIVE	DAWSON	4	60	60	.374	72	88	PMS	3578	429	2840	7	21	10	20	28	86	81	.1
PD16	125+0.519	3.5 S MUSSEL CO	YELLOWSTONE	11	68	68	1.739	40	40	PMS	1100	143	403	8	27	10	12	25	82	81	.3
PD21	44+0.516	115 S CONRAD	PONDERA	6	72	72	.825	40	40	PMS	652	84	616	10	30	10	2	28	80	81	.2
PD50	16+0.625	8.3 N FAS 499	GALLATIN	10	63	63	14.593	32	32	PMS	763	119	599	6	18	10	20	27	81	81	2.8
PD35	45+0.607	8.3 W JCT FAP 19	GRANITE	8	56	72	1.199	22	30	RMS	136	21	537	0	10	10	20	29	69	81	.4
RD37	95+0.715	EPSIE	POWDER RIVER	12	58	69	7.908	28	28	RMS	512	69	368	5	28	10	5	27	79	81	1.7
PD27	73+0.386	5.7 S WIBAUX	WIBAUX	4	65	65	5.731	28	28	PMS	506	65	480	8	25	10	8	28	79	81	1.2
PD33	14+0.002	13.3 N LIBBY	LINCOLN	1	74	74	3.652	34	34	PMS	418	54	289	10	30	10	2	27	79	82	.8
PD32	51+0.737	SCOBEY	DANIELS	3	58	68	9.190	24	26	PMS	195	27	456	9	24	10	2	29	74	82	2.4
RD42	37+0.240	35.3 N MCCONE CO	MCCONE	4	57	64	8.785	24	32	BST	125	20	627	0	10	10	20	30	70	82	2.6
PD19	0+0.000	JCT FAI RTE 90	DEER LODGE	9	64	64	2.889	76	76	PMS	2916	379	2208	9	28	10	12	27	86	82	.4
PD16	257+0.224	0.9 N FAS 376	PHILLIPS	3	57	59	3.664	24	29	RMS	250	42	531	0	16	10	20	29	75	82	.9
PD16	260+0.891	4.6 N FAS 376	PHILLIPS	3	57	59	3.479	24	29	PMS	218	36	558	2	16	10	17	29	74	82	.9
RD15	369+0.348	0.6 W GLENDIVE	DAWSON	4	69	69	.279	24	24	PMS	3575	429	805	9	26	10	20	22	87	82	
PD10	104+0.365	6.9 S FAP 1	HILL	2	67	67	5.125	40	40	PMS	1561	202	320	9	24	10	20	21	84	82	.8
PD10	89+0.607	0.2 N HILL CO	HILL	2	70	70	1.319	32	32	PMS	1137	147	720	9	26	10	9	27	83	82	.2
PD11	1+0.362	1.3 N GARDINER	PARK	10	71	71	4.311	34	34	PMS	1137	244	511	9	27	10	14	23	83	82	.7
PD03	182+0.598	0.8 N CLANCY	JEFFERSON	7	30	69	.211	24	24	PMS	505	65	353	4	23	6	20	27	80	82	
PD02	144+0.807	9.8 W DRUMMOND	GRANITE	8	70	70	.672	30	30	PMS	148	19	226	8	23	10	1	29	71	82	.2
PD01	423+0.924	0.8 W HARLEM	BLAINE	2	68	68	.797	40	40	PMS	1794	233	281	9	28	10	20	18	85	82	.1
PD01	472+0.410	MALTA	PHILLIPS	3	67	67	8.975	40	40	RMS	1305	169	234	9	26	10	20	19	84	82	1.4
PD02	319+0.633	8.0 E BELGRADE	GALLATIN	10	66	66	.198	68	68	PMS	6973	906	1840	9	27	10	20	23	89	83	
PD04	23+0.235	2.4 S BRIDGER	CARBON	11	72	72	2.441	40	40	PMS	1577	205	266	9	28	10	20	18	85	83	.4
RD07	74+0.242	0.4 S FLORENCE	RAVALLI	8	74	75	.579	64	64	PMS	3947	513	2160	10	30	10	12	26	88	83	.1
PD09	0+0.000	JCT FAI 15	LEWIS AND CLARK	7	67	67	2.209	30	30	PMS	315	50	697	9	27	10	3	29	78	83	.5
RD14	88+0.033	JCT FAS RTE 296	WHEATLAND	10	66	66	4.784	40	40	PMS	488	63	344	8	23	10	12	27	80	83	1.0
PD14	242+0.413	AHLES	ROSEBUD	12	50	63	9.949	20	24	RMS	222	35	354	3	17	9	18	29	76	83	2.4
PD22	52+0.606	9.2 S JCT FAP 30	SHERIDAN	3	63	63	11.140	32	32	PMS	689	103	672	6	21	10	17	28	82	83	2.0
PD18	73+0.587	14.7 N COHAGEN	GARFIELD	5	58	65	9.391	28	28	RMS	291	37	472	7	25	10	6	29	77	83	2.2
PD37	84+0.754	2.1 E FOR BORY	POWDER RIVER	12	58	69	10.980	28	28	PMS	492	66	480	7	23	10	13	28	81	83	2.1
PD46	0+0.000	JCT FAP RTE 7	RAVALLI	8	60	63	.105	28	28	PMS	250	37	406	10	28	10	0	29	77	83	
PD42	52+0.226	4.0 S VALLEY CO	MCCONE	4	36	66	4.061	28	28	RMS	166	26	395	6	25	10	4	29	74	83	1.1
PD33	17+0.654	LIBBY DAM APPR	LINCOLN	1	74	74	12.374	34	34	PMS	383	49	243	10	30	10	2	27	79	83	2.6
PD27	54+0.746	WIBAUX CO	WIBAUX	4	65	65	11.265	28	28	PMS	336	43	522	8	24	10	7	29	78	83	2.5
PD50	7+0.330	7.2 N WEST YELL	GALLATIN	10	64	64	1.047	34	34	PMS	1300	286	720	8	23	10	20	24	85	83	.2
PD51	27+0.527	RICHEY	DAWSON	4	58	58	5.039	28	32	BST	235	32	580	5	18	10	14	29	76	83	1.2
RD48	18+0.320	4.4 S YELLOWSTONE	BIG HORN	11	63	63	4.388	28	28	RMS	272	38	312	9	27	10	4	28	78	84	1.0
PD51	59+0.918	10.6 E LAMBERT	RICHLAND	4	55	55	4.437	25	25	BST	349	48	377	4	18	10	20	28	80	84	.9
PD51	3+0.340	3.3 E JCT FAP 15	MCCONE	4	60	61	5.001	30	30	PMS	247	34	463	7	23	10	9	29	78	84	1.1
PD50	10+0.485	2.4 N FAS 499	GALLATIN	10	63	63	4.278	32	32	PMS	763	119	470	7	21	10	20	26	84	84	.7
PD19	63+0.222	0.6 S DRUMMOND	GRANITE	8	66	66	.449	32	32	PMS	712	103	720	10	26	10	9	28	83	84	.1
PD15	241+0.448	2.5 E FAS 462	GARFIELD	5	68	68	1.022	36	36	RMS	315	48	212	8	24	10	10	27	79	84	.2
RD17	8+0.358	8.0 E MILES CITY	CUSTER	12	62	62	.659	32	32	PMS	175	22	365	10	25	10	1	29	75	84	.2
PD17	29+0.626	5.6 W TERRY	PRAIRIE	4	66	66	1.561	28	28	RMS	122	15	531	8	23	10	2	30	73	84	.4
RD15	64+0.443	FERGUS CO	FERGUS	5	71	71	.515	32	32	PMS	1438	171	621	10	30	10	10	26	86	84	.1
PD08	25+0.581	1.9 W L & C CO	POWELL	8	73	73	1.668	56	56	PMS	1552	201	1920	9	28	10	11	28	86	84	.2
PD11	129+0.138	JCT FAP RTE 14	MEAGHER	10	55	69	9.550	28	28	RMS	361	54	472	9	28	10	5	28	80	84	1.9
PD02	576+0.230	2.8 W ROSEBUD	ROSEBUD	12	71	71	.472	28	28	PMS	129	16	277	9	28	7	0	29	73	84	.1
RD01	348+0.215	HINGHAM	HILL	2	60	60	6.381	32	32	PMS	969	125	621	8	22	10	18	27	85	84	1.0
PD01	171+0.169	25.6 W GLACIER CO	FLATHEAD	1	66	66	6.460	32	32	PMS	883	168	428	7	23	10	20	24	84	84	1.0

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

PT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS 01ST BT	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	OHV	SERVICE VOLUME	SUFFICIENCY RATINGS END	SRF	ORN	SAF	CAP	TOT	AOJ	DEFIC MILES
P001	341+0.907	RUDYARD FAS 231	HILL	2 60	60	5.813	32	32	PMS	1223	158	666	8	23	10	19	26	86	85	.8
P011	80+0.487	5.1 N CLYDE PARK	PARK	10 73	73	8.993	32	32	PMS	434	65	643	9	28	10	7	28	82	85	1.6
P008	107+0.697	0.2 N FAI 90	BROADWATER	7 68	68	.196	40	40	PMS	1720	223	296	10	28	10	20	19	87	85	
P010	84+0.818	4.8 N BIG SANDY	CHOUTEAU	6 70	70	1.223	32	32	PMS	1145	148	720	9	28	10	12	27	86	85	.2
P014	265+0.115	12.6 E VANADA	ROSEBUD	12 57	75	5.387	32	32	PMS	348	55	546	10	30	10	3	28	81	85	1.0
P017	18+0.648	DIAMOND RING INTCH	CUSTER	12 71	71	.579	26	26	PMS	168	21	671	9	28	10	0	30	77	85	.1
P015	306+0.479	2 MI E LINDSAY	DAWSON	4 67	67	10.240	40	40	PMS	766	99	296	7	23	10	20	25	85	85	1.5
P022	75+0.881	FROID	ROOSEVELT	3 71	71	5.469	32	32	PMS	665	99	640	10	24	10	12	28	84	85	.9
P048	29+0.507	0.3 S JCT I 94	YELLOWSTONE	11 74	74	.302	34	34	PMS	306	42	351	10	30	10	2	28	80	85	.1
P033	53+0.851	RESERV BR APPR	LINCOLN	1 71	71	.676	34	34	PMS	203	26	138	10	30	10	1	27	78	85	.1
P037	41+0.208	0.8 W LAME DEER	ROSEBUD	12 75	75	.872	48	48	PMS	1314	177	272	10	30	10	17	20	87	85	.1
P046	7+0.770	6.6 E IDAHO LINE	BEAVERHEAD	9 60	63	9.393	28	28	PMS	288	43	395	9	26	10	7	28	80	85	1.9
P019	2+0.896	OPPORTUNITY	DEER LODGE	9 61	61	2.670	76	76	PMS	3878	504	2208	9	26	10	18	27	90	86	.3
P016	175+0.885	PETROLEUM CO	PETROLEUM	5 63	63	4.714	30	30	PMS	425	55	576	7	21	10	16	29	83	86	.8
P015	161+0.578	3.1 E GARFIELD CO	GARFIELD	5 68	68	9.598	36	36	PMS	294	44	450	5	21	10	16	29	81	86	1.8
P002	187+0.906	N DEER LODGE INT	POWELL	8 62	62	.928	36	36	PMS	1920	249	667	9	26	10	20	24	89	86	.1
P002	661+0.731	FALLON CO	FALLON	12 67	67	6.054	40	40	PMS	430	55	180	7	21	10	20	25	83	86	1.0
P002	655+0.880	5.9 W FALLON CO	CUSTER	12 67	67	5.873	40	40	PMS	415	53	165	7	21	10	20	25	83	86	1.0
P002	580+0.354	JCT FAI 94	ROSEBUD	12 71	71	.343	24	28	PMS	128	16	277	9	28	10	0	29	76	86	.1
P002	412+0.631	SPRINGTIME INTCH	STILLWATER	11 72	72	.261	30	30	PMS	182	23	289	10	28	10	1	29	78	86	.1
P003	246+0.660	CANYON INT APPR	CASCADE	6 68	68	.292	24	24	PMS	127	19	266	10	27	10	0	29	76	86	.1
P006	13+0.530	2.2 E BULL RIVER	SANDERS	8 63	63	1.194	28	28	RMS	605	88	501	8	20	10	20	27	85	86	.2
P004	19+0.206	6.5 S BRIDGER	CARBON	11 72	72	4.035	32	32	PMS	1008	131	448	8	28	10	16	26	88	87	.5
P003	245+0.850	3.7 N CASCADE CO	CASCADE	6 68	68	.810	24	24	PMS	170	25	243	10	30	10	2	28	80	87	.2
P002	137+0.085	BEARMOUTH WEST INT	GRANITE	8 70	70	.156	30	30	PMS	148	19	604	10	28	10	0	30	78	87	
P002	151+0.095	3.5 W DRUMMOND	GRANITE	8 64	64	.349	24	24	PMS	148	19	391	6	14	10	20	29	79	87	.1
P002	623+0.171	7.0 E JCT FAI 94	CUSTER	12 70	70	7.734	34	34	PMS	543	70	400	9	27	10	13	27	86	87	1.1
P001	446+0.310	PHILLIPS CO	PHILLIPS	3 73	73	7.360	40	40	PMS	1025	133	281	8	27	10	20	23	88	87	.9
P015	287+0.711	7.0 E FAP 51	MCCONE	4 64	64	2.137	32	32	PMS	550	71	403	7	22	10	20	27	86	87	.3
P023	76+0.303	JCT FAP RTE 37	POWDER RIVER	12 69	69	1.530	28	28	PMS	1189	172	276	9	28	10	20	21	88	87	.2
P043	25+0.294	10.5 N FAS 236	FERGUS	5 63	63	3.738	28	30	PMS	275	35	442	5	18	10	20	29	82	87	.7
P033	42+0.817	11.0 S RES BR APPR	LINCOLN	1 74	74	11.169	34	34	PMS	175	22	243	10	30	10	1	29	80	87	2.2
P033	30+0.033	FIVE MILE CR	LINCOLN	1 74	74	12.783	34	34	PMS	195	25	243	10	30	10	2	28	80	87	2.6
P054	9+0.128	BIDOLE	POWDER RIVER	12 68	68	8.767	30	32	PMS	284	36	420	8	26	10	10	29	83	87	1.5
P051	0+0.000	JCT FAP 15	MCCONE	4 60	61	3.326	30	30	PMS	313	43	655	7	24	10	13	29	83	87	.6
P046	31+0.616	5.3 E WISDOM	BEAVERHEAD	9 65	65	5.283	26	26	PMS	288	43	552	8	20	10	15	29	82	87	1.0
P046	51+0.307	BEAVERHEAD CO LINE	BEAVERHEAD	9 61	61	.089	26	28	PMS	286	42	442	7	18	10	20	29	84	88	
P042	56+0.288	VALLEY CO	VALLEY	3 36	66	2.893	30	36	RMS	245	39	592	9	27	10	8	29	83	88	.5
P015	280+0.777	JCT FAP RTE 51	MCCONE	4 66	66	6.933	32	32	PMS	732	95	621	7	23	10	20	28	88	88	.8
P014	122+0.568	GOLDEN VALLEY CO	GOLDEN VALLEY	11 67	67	2.375	40	40	PMS	835	108	296	8	25	10	20	25	88	88	.3
P011	191+0.174	9.2 SO. FAP 15	CASCADE	6 65	69	9.190	40	40	PMS	451	67	568	10	28	10	10	28	86	88	1.3
P011	146+0.022	11.6 S CASCADE CO	MEAGHER	10 59	63	8.316	26	26	PMS	329	49	418	7	23	10	17	28	85	88	1.2
P001	263+0.107	0.3 E TOOLE CO	TOOLE	2 65	65	7.491	32	32	PMS	1187	178	666	10	24	10	19	26	89	88	.8
P001	669+0.592	2.2 N EAST GLAC	GLACIER	2 29	72	.622	24	24	PMS	491	99	611	8	28	10	12	28	86	88	.1
P002	587+0.721	4.0 W HATHAWAY	ROSEBUD	12 71	71	.347	28	28	PMS	128	16	356	10	30	10	0	29	79	88	.1
P002	150+0.700	3.9 W DRUMMOND	GRANITE	8 70	70	.422	30	30	PMS	148	19	459	5	16	10	20	29	80	88	.1
P003	238+0.174	1.8 N CRAIG	LEWIS AND CLARK	7 67	67	.419	24	24	PMS	125	33	406	10	28	10	1	29	78	88	.1
P006	95+0.631	PERMA FAS 382	SANDERS	8 57	75	3.623	32	32	PMS	659	98	448	10	30	8	12	27	87	88	.5
P003	244+0.350	2.2 N CASCADE CO	CASCADE	6 72	72	1.501	26	26	PMS	158	24	527	10	30	10	2	29	81	89	.3
P003	250+0.925	HARDY CR SEP	CASCADE	6 68	68	.674	24	24	PMS	107	16	510	10	29	10	0	30	79	89	.1
P002	667+0.771	JCT. FAS RTE. 320	FALLON	12 58	72	12.363	32	32	PMS	500	65	520	8	27	10	15	28	88	89	1.9
P003	183+0.801	2.0 N CLANCY	JEFFERSON	7 69	69	.314	24	24	PMS	505	65	218	8	24	10	20	26	88	89	
P010	89+0.418	HILL CO	HILL	2 30	70	.189	30	30	RMS	1116	145	702	8	25	10	20	27	90	89	
P011	30+0.977	JCT FAS RTE 362	PARK	10 61	61	9.708	32	32	PMS	1057	227	748	9	27	10	19	25	90	89	1.0
P014	45+0.138	JCT FAP RTE 11	MEAGHER	10 65	65	3.943	40	40	PMS	399	51	255	7	22	10	20	27	86	89	.6

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	ST	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	ADT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FND	SRF	OPN	SAF	CAP	TOT	ADJ	OEFIC MILES
P013	97+0.115	0.6 E THREE FORKS	GALLATIN	10	64	69	.217	32	32	PMS	1446	187	457	9	28	10	20	24	91	89	
PJ18	63+0.369	4.4 N COHAGEN	GARFIELD	5	67	67	10.222	30	30	PMS	208	27	702	7	24	10	13	29	83	89	1.7
PJ22	63+0.803	JCT FAS 515	SHERIDAN	3	63	63	.265	32	32	PMS	603	90	896	7	23	10	20	28	88	89	
PJ42	19+0.720	17.7 N MCCONE CO	MCCONE	4	62	71	12.052	30	30	PMS	118	18	388	5	25	10	10	29	79	89	2.5
PJ46	36+0.881	4.9 W DEER LODGE CO	BEAVERHEAD	9	65	65	4.966	26	26	PMS	286	42	392	7	21	10	20	28	86	90	.7
PJ45	37+0.865	6.0 S HARLOWTON	WHEATLAND	10	70	70	5.994	32	32	PMS	475	61	672	9	24	10	17	29	89	90	.7
PJ22	96+0.836	5.0 S RICHLAND CO	RICHLAND	4	70	70	3.328	34	34	PMS	517	77	360	8	24	10	20	27	89	90	.4
PJ21	57+0.096	JCT FAS 216	PONDERA	6	72	72	.523	34	34	PMS	526	68	720	10	30	10	10	29	89	90	.1
PJ22	0+0.523	SCOBEY	DANIELS	3	65	65	7.070	32	32	PMS	580	87	672	8	23	10	20	28	89	90	.8
P015	289+0.829	DAWSON CO	DAWSON	4	64	64	7.066	32	32	PMS	508	66	448	7	24	10	20	28	89	90	.8
PJ13	8+0.630	JCT FAS RTE 499	MADISON	9	66	66	7.813	40	40	PMS	336	67	697	9	27	10	12	29	87	90	1.0
PJ13	93+0.067	0.3 W FAP 8	BROADWATER	7	68	68	.296	40	40	RMS	358	46	96	9	26	10	20	23	88	90	
PJ09	1+0.950	1.9 N FAI 15	LEWIS AND CLARK	7	59	59	10.453	32	32	PMS	292	46	482	7	23	10	17	29	86	90	1.5
PJ02	630+0.911	10.6 W LOCATE	CUSTER	12	75	75	6.533	34	34	PMS	471	61	380	10	30	10	11	28	89	90	.7
PJ02	141+0.609	3.9 E BEARMOUTH	GRANITE	8	70	70	.520	30	30	PMS	148	19	291	7	22	5	20	29	83	90	.1
PJC1	555+0.899	NASHUA	VALLEY	3	56	70	.095	32	32	PMS	1329	179	528	9	27	10	20	25	91	90	
PJ03	382+0.648	8.4 N DUPUYER	PONDERA	6	66	66	5.576	34	34	PMS	614	147	640	10	26	10	16	27	89	90	.6
PJ03	388+0.220	GLACIER CO	GLACIER	2	68	68	5.858	34	38	PMS	642	154	529	10	27	10	17	26	90	91	.6
PJ15	158+0.394	GARFIELD CO	GARFIELD	5	73	73	3.184	30	30	PMS	307	46	567	10	30	10	9	29	88	91	.4
PJ17	37+0.851	1.3 E TERRY	PRAIRIE	4	55	55	.844	24	32	RMS	94	14	424	6	16	9	20	30	81	91	.2
P046	4+0.107	2.9 E IDAHO LINE	BEAVERHEAD	9	60	63	3.674	28	28	PMS	260	39	468	7	21	10	20	29	87	91	.5
P046	16+0.966	9.2 W WISDOM	BEAVERHEAD	9	62	62	9.226	30	30	PMS	305	45	604	7	23	10	20	29	89	92	1.0
PJ35	46+0.806	7.1 W JCT FAP 19	GRANITE	8	66	66	7.042	30	30	PMS	143	22	410	10	27	10	9	29	85	92	1.1
PJ28	60+0.000	8.7 S REO LODGE	CARBON	11	69	69	4.227	34	34	PMS	595	133	522	9	26	10	20	26	91	92	.4
PJ11	19+0.339	11.6 S FAS 362	PARK	10	61	61	11.618	32	32	PMS	852	183	748	9	27	10	20	26	92	92	.9
PJ09	20+0.149	JCT FAP 24	LEWIS AND CLARK	7	63	63	.726	32	32	PMS	282	45	411	8	23	10	20	28	89	92	.1
PJ13	21+0.332	9.3 S FAS 527	MADISON	9	71	71	2.992	40	40	PMS	435	87	597	10	28	10	15	28	91	92	.3
PJ03	238+0.593	2.2 N CRAIG	LEWIS AND CLARK	7	69	69	2.668	24	24	PMS	125	32	336	10	28	10	8	29	85	92	.4
PJ06	102+0.193	6.6 E PERMA	SANDERS	8	69	69	.754	32	32	PMS	737	109	694	8	26	10	20	28	92	92	.1
PJ06	90+0.589	4.6 W PERMA	SANDERS	8	69	69	3.542	32	32	PMS	591	88	470	9	27	10	18	27	91	92	.3
PJ01	177+0.633	19.1 W GLACIER CO	FLATHEAD	1	69	69	2.884	34	34	PMS	782	149	456	10	27	10	20	25	92	92	.2
PJ01	169+0.063	15.8 E WEST GLAC	FLATHEAD	1	75	75	2.107	32	32	PMS	892	170	478	9	28	10	20	25	92	92	.2
PJ03	37+0.026	0.2 S REO ROCK INT	BEAVERHEAD	9	72	72	.211	28	28	PMS	59	7	356	10	30	10	0	30	80	92	
PJ02	146+0.488	8.1 W DRUMMOND	GRANITE	8	70	70	.508	30	30	PMS	148	19	448	7	22	10	20	29	88	93	.1
PJ11	5+0.566	5.0 N GARDINER	PARK	10	69	69	5.149	34	34	PMS	877	188	596	10	28	10	20	25	93	93	.4
PJ11	16+0.633	14.3 S FAS 362	PARK	10	61	61	2.712	32	32	PMS	794	170	746	10	28	10	18	27	93	93	.2
PJ22	73+0.876	2.0 S ROOSEVELT CO	ROOSEVELT	3	71	71	1.992	32	32	PMS	606	90	576	10	25	10	20	28	93	93	.1
PJ11	1+0.019	GARDINER NO	PARK	10	75	75	.343	34	34	PMS	1319	283	774	10	30	10	20	25	95	94	
PJ01	414+0.015	1.0 E ZURICH	BLAINE	2	56	73	7.314	32	32	PMS	1501	195	666	9	30	10	20	26	95	94	.4
PJ45	7+0.339	4.6 N FAS 479	SWEET GRASS	10	69	69	.695	30	30	RMS	477	62	549	9	26	10	20	28	93	94	
P048	22+0.705	YELLOWSTONE CO	YELLOWSTONE	11	63	63	3.682	28	28	PMS	282	39	294	9	27	10	18	28	92	94	.3
PJ51	8+0.342	DAWSON CO	DAWSON	4	60	61	.775	30	30	PMS	207	28	702	9	25	10	20	29	93	95	.1
PJ02	75+0.163	ALBERTON INTCH 190	MINERAL	8	63	63	.005	28	28	PMS	589	76	666	10	27	10	20	28	95	95	
P002	439+0.123	PARK CITY	STILLWATER	11	67	67	.237	34	34	PMS	446	57	383	10	26	10	20	28	94	95	
PJ13	16+0.388	7.7 N FAS 499	MADISON	9	69	69	4.975	40	40	PMS	440	88	664	10	26	10	20	28	94	95	.3
PJ15	64+0.958	JCT FA RTE 45	FERGUS	5	71	71	2.017	32	32	PMS	1436	170	672	10	30	10	20	26	96	95	.1
PJ11	89+0.649	8.3 S MEAGHER CO	PARK	10	73	73	8.381	32	32	PMS	238	35	643	10	30	10	15	29	94	96	.5
PJ15	180+0.288	SAND SPRINGS	GARFIELD	5	73	73	11.848	32	32	PMS	273	41	400	9	28	10	20	28	95	96	.6
PJ45	22+0.798	5.4 S WHEATLAND CO	SWEET GRASS	10	69	69	1.029	30	30	RMS	261	33	329	10	26	10	20	28	94	96	.1
PJ37	40+0.709	1.3 W LAME DEER	ROSEBUD	12	75	75	.522	56	56	PMS	1289	174	1368	10	30	10	20	28	98	97	
P048	26+0.401	3.7 N YELLOWST CO	YELLOWSTONE	11	63	63	3.103	28	28	PMS	294	41	504	10	27	10	20	29	96	97	.1
PJ15	156+0.721	1.6 W GARFIELD CO	PETROLEUM	5	73	73	1.663	30	30	PMS	310	47	567	10	30	10	17	29	96	97	.1
PJ02	637+0.464	4.1 W LOCATE	CUSTER	12	73	73	6.280	34	34	PMS	457	59	400	10	30	10	20	28	98	98	.1
PJ03	253+0.450	TINTINGER INTCH	CASCADE	6	63	63	.238	24	24	PMS	98	14	672	10	27	10	20	30	97	98	
P003	258+0.364	0.6 S CASCADE INTC	CASCADE	6	63	63	.610	24	24	PMS	77	23	504	10	28	10	20	29	97	99	

SUFFICIENCY RATINGS BY SECTIONS -- STATEWIDE

RT-#	MILEPOINT	SECTION DESCRIPTION	COUNTY	FIN YEARS DIST	ST	IM	SECTION LENGTH	WIDTH SRF	ROY	SUF TYP	AOT	DHV	SERVICE VOLUME	SUFFICIENCY RATINGS FNO	SRF	ORN	SAF	CAP	TOT	ADJ	DEFIC MILES
PJ03	219+0.219	JCT FAI 15	LEWIS AND CLARK	7	65	65	.440	24	24	PMS	45	13	374	10	25	10	20	29	94	99	
PJ54	17+0.695	8.8 N BIDDLE	POWDER RIVER	12	74	75	5.910	30	30	PMS	328	42	426	10	30	10	20	29	99	99	.1
PJ54	23+0.736	5.6 S FA RTE 23	POWDER RIVER	12			5.516	UNDER CONSTRUCTION													
PJ46	77+0.114	DIVIDE EAST	SILVER BOW	9			.784	UNDER CONSTRUCTION													
PJ38	7+0.759	0.3 E COL FALLS	FLATHEAD	1			.303	UNDER CONSTRUCTION													
PJ37	27+0.204	2.7 E BUSBY	BIG HORN	11			5.843	UNDER CONSTRUCTION													
PJ02	571+0.609	WEIGH ST FORSYTH E	ROSEBUD	12	71	71	.360	28	28	PMS	120	15	720	10	30	10	20	30	100	100	
PJ02	579+0.967	0.4 W JCT FAI 94	ROSEBUD	12	71	71	.387	28	28	PMS	140	18	990	10	30	10	20	30	100	100	
PJ01	322+0.605	CHESTER	LIBERTY	2			3.787	UNDER CONSTRUCTION													
PJ01	321+0.077	0.6 W CHESTER	LIBERTY	2			.700	UNDER CONSTRUCTION													
PJ01	326+0.441	3.8 E CHESTER	LIBERTY	2			6.154	UNDER CONSTRUCTION													
PJ01	33+0.316	0.6 E LIBBY	LINCOLN	1			4.544	UNDER CONSTRUCTION													
PJ01	32+0.748	LIBBY	LINCOLN	1			.561	UNDER CONSTRUCTION													
PJ01	29+0.863	2.0 W LIBBY	LINCOLN	1			2.036	UNDER CONSTRUCTION													
PJ18	58+0.973	COHAGEN	GARFIELD	5			4.360	UNDER CONSTRUCTION													
PJ15	296+0.861	7.1 E DAWSON CO	DAWSON	4			9.622	UNDER CONSTRUCTION													
PJ22	64+0.348	MEDICINE LAKE	SHERIDAN	3			7.508	UNDER CONSTRUCTION													
PJ22	71+0.860	ROOSEVELT CO	ROOSEVELT	3			2.018	UNDER CONSTRUCTION													
PJ08	27+0.319	0.3 W L & C CO	POWELL	8			.308	UNDER CONSTRUCTION													
PJ08	27+0.617	LEWIS & CLARK CO	LEWIS AND CLARK	7			2.262	UNDER CONSTRUCTION													
PJ13	0+0.000	IDAHO LINE	MADISON	9			8.564	UNDER CONSTRUCTION													
PJ14	48+0.995	3.9 E FAP 11	MEAGHER	10			6.935	UNDER CONSTRUCTION													
PJ13	74+0.873	HARRISON	MADISON	9			5.908	UNDER CONSTRUCTION													
PJ13	80+0.762	GALLATIN CO LINE	GALLATIN	10			1.444	UNDER CONSTRUCTION													
		SYSTEM TOTAL					4861.700														391893.9